

Cisco FirePOWER Next-Generation IPS Configuration:

Login NGIPS using default username and password (Username: **admin**, Password: **Admin123**)

```
Cisco NGIPSv for VMware v6.2.3 (build 83)
firepower login: Nov 04 08:01:13 firepower SF-IMS[16718]: [16718] init script:system [INFO] pmmon Setting affinity to 0-3...
pid 16712's current affinity list: 0-3
pid 16712's new affinity list: 0-3
Nov 04 08:01:13 firepower SF-IMS[16720]: [16720] init script:system [INFO] pmmon
The Process Manager is not running...
Nov 04 08:01:13 firepower SF-IMS[16721]: [16721] init script:system [INFO] pmmon
Starting the Process Manager...
Nov 04 08:01:13 firepower SF-IMS[16722]: [16722] pm:pm [INFO] Using model number
69A
e1000: eth0: e1000_phy_read_status: Error reading PHY register
e1000: eth0: e1000_watchdog_task: NIC Link is Up 1000 Mbps Full Duplex, Flow Control: None
INIT: Id "s1" respawning too fast: disabled for 5 minutes

Cisco NGIPSv for VMware v6.2.3 (build 83)
firepower login: admin
Password:
```

Accept End User License Agreement (EULA), Enter **"YES"** to accept the EULA.

```
Cisco and the Cisco logo are trademarks or registered trademarks of Cisco
and/or its affiliates in the U.S. and other countries. To view a list of Cisco
trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks
mentioned are the property of their respective owners. The use of the word
partner does not imply a partnership relationship between Cisco and any other
company. (1110R)

Please enter 'YES' or press <ENTER> to AGREE to the EULA: yes
```

Change the password type new password, confirm new password and press enter.

```
Cisco and the Cisco logo are trademarks or registered trademarks of Cisco
and/or its affiliates in the U.S. and other countries. To view a list of Cisco
trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks
mentioned are the property of their respective owners. The use of the word
partner does not imply a partnership relationship between Cisco and any other
company. (1110R)

Please enter 'YES' or press <ENTER> to AGREE to the EULA: yes

System initialization in progress. Please stand by.
You must change the password for 'admin' to continue.
Enter new password:
Confirm new password: _
```

Configure FirePOWER Next-generation IPS:

Enter new password: **Abc@123** and Confirm new password: **Abc@123**

Press "y" key to configure IPv4 address and Press "n" key to not configure IPv6 address.

Enter "manual" and press enter key to configure IPv4 address manually.

Enter IPv4 address for the management interface: **10.1.1.50**

Enter netmask: **255.255.255.0**

Enter IPv4 default gateway address: **10.1.1.20**

Enter hostname: **NGIPS**

Enter DNS Server address: **8.8.8.8**

```
You must configure the network to continue.
You must configure at least one of IPv4 or IPv6.
Do you want to configure IPv4? (y/n) [y]: y
Do you want to configure IPv6? (y/n) [n]: n
Configure IPv4 via DHCP or manually? (dhcp/manual) [manual]:
Enter an IPv4 address for the management interface [192.168.45.45]: 10.1.1.50
INIT: Id "s1" respawning too fast: disabled for 5 minutes55.255.0]:
Enter the IPv4 default gateway for the management interface []: 10.1.1.20
Enter a fully qualified hostname for this system [firepower]: NGIPS
Enter a comma-separated list of DNS servers or 'none' []: 8.8.8.8
Enter a comma-separated list of search domains or 'none' [example.net]: google.c
om
```

Choose Detection Mode Inline and press enter

```
Choose Detection Mode ('Passive', 'Inline', 'Network Discovery') [Inline]:
```


Command to see full Information related to Network:

#show network

```
===== [ System Information ] =====
Hostname           : NGIPS
Domains            : google.com
DNS Servers        : 8.8.8.8
Management port    : 8305
IPv4 Default route
  Gateway          : 10.1.1.20
===== [ eth0 ] =====
State              : Enabled
Channels           : Management & Events
Mode               : Autonegotiation Non-Autonegotiation
MDI/MDIX           : Auto/MDIX
MTU                : 1500
MAC Address        : 00:50:00:00:05:00
----- [ IPv4 ] -----
Configuration      : Manual
Address            : 10.1.1.50
Netmask            : 255.255.255.0
Broadcast          : 10.1.1.255
----- [ IPv6 ] -----
Configuration      : Disabled
===== [ Proxy Information ] =====
```


Add Manager:

Command to see manager on Cisco NGIPS: **#show managers**

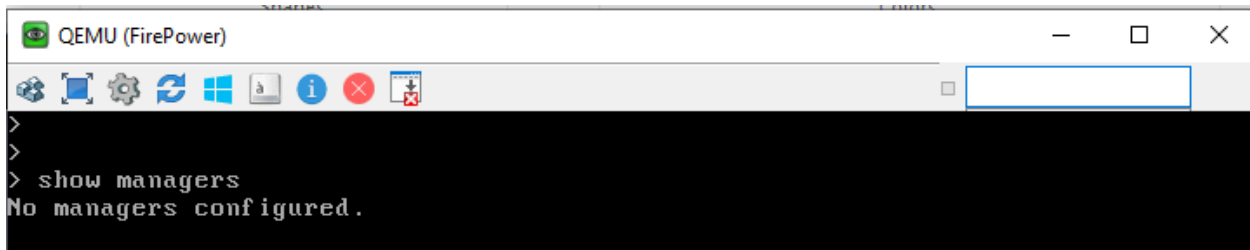

```
QEMU (FirePower)
>
>
> show managers
No managers configured.
```

Configure manager using following command: **#configure manager add 10.1.1.10 cisco**

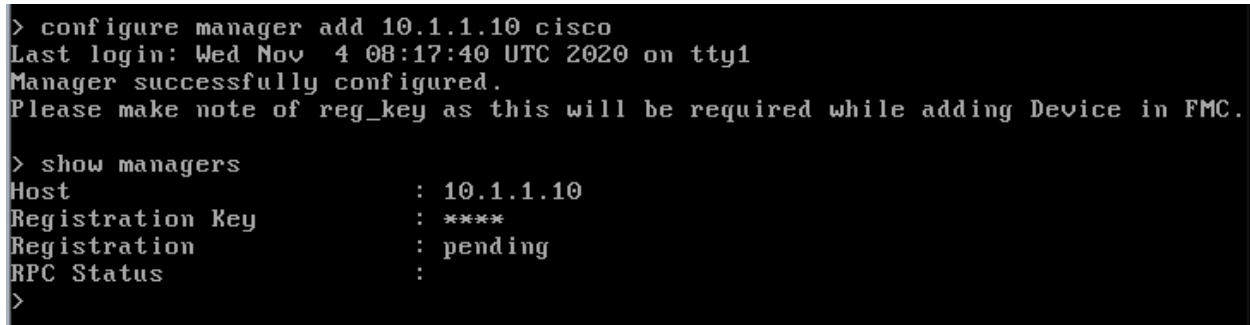

```
> configure manager add 10.1.1.10 cisco
Last login: Wed Nov  4 08:17:40 UTC 2020 on tty1
Manager successfully configured.
Please make note of reg_key as this will be required while adding Device in FMC.

> show managers
Host                : 10.1.1.10
Registration Key     : *****
Registration        : pending
RPC Status          :
>
```