


Firepower Threat Defense (FTD) Configuration:

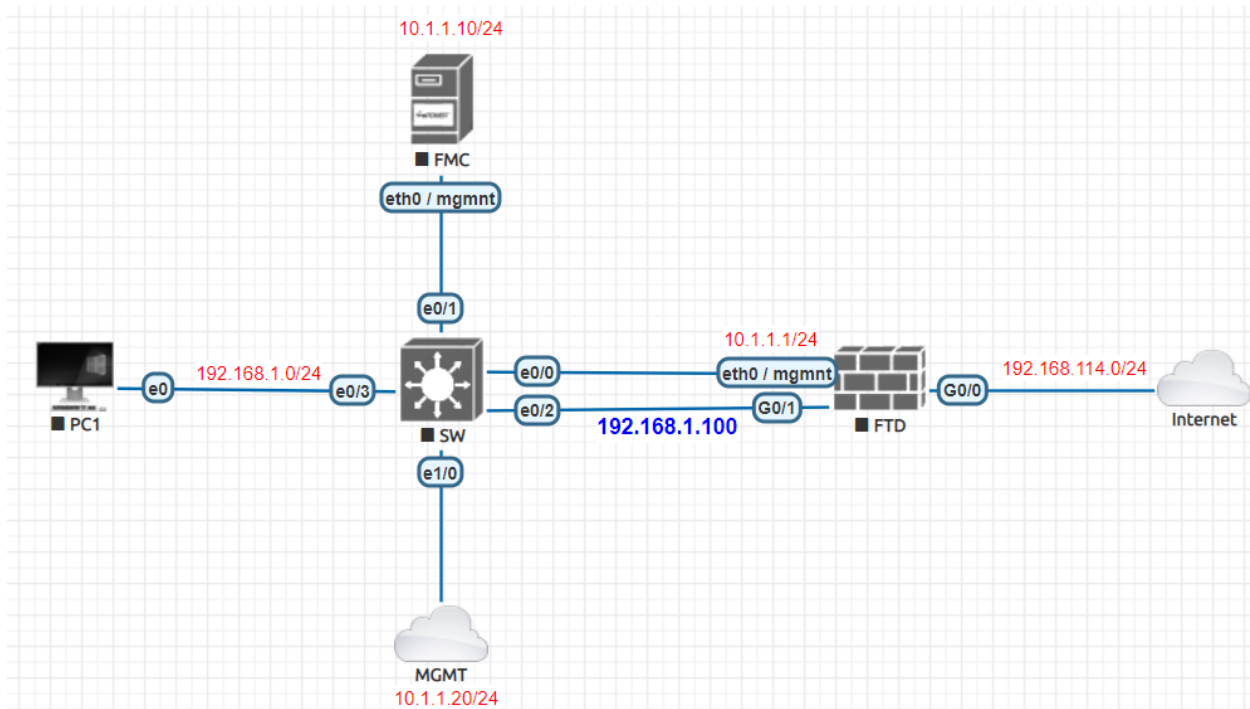

Login FTD using default username and password (Username: **admin**, Password: **Admin123**)

```
QEMU (FTD)
Cisco Firepower Threat Defense for KUM v6.2.3 (build 83)
INIT: Id "ftd1" respawning too fast: disabled for 5 minutes
INIT: Id "ftd1" respawning too fast: disabled for 5 minutes

Cisco Firepower Threat Defense for KUM v6.2.3 (build 83)
firepower login: admin
Password: _
```

Accept End User License Agreement (EULA), Enter "**YES**" to accept the EULA.

```
Cisco and the Cisco logo are trademarks or registered trademarks of Cisco
and/or its affiliates in the U.S. and other countries. To view a list of Cisco
trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks
mentioned are the property of their respective owners. The use of the word
partner does not imply a partnership relationship between Cisco and any other
company. (1110R)

Please enter 'YES' or press <ENTER> to AGREE to the EULA: yes_
```

Configure Firepower Threat Defense (FTD)

Enter new password: **Abc@123** and Confirm new password: **Abc@123**

Press "y" key to configure IPv4 address and Press "n" key to not configure IPv6 address.

Enter "manual" and press enter key to configure IPv4 address manually.


Enter IPv4 address for the management interface: **10.1.1.1**

Enter netmask: **255.255.255.0**

Enter IPv4 default gateway address: **10.1.1.20**

Enter hostname: **FTD**

Enter DNS Server address: **8.8.8.8**

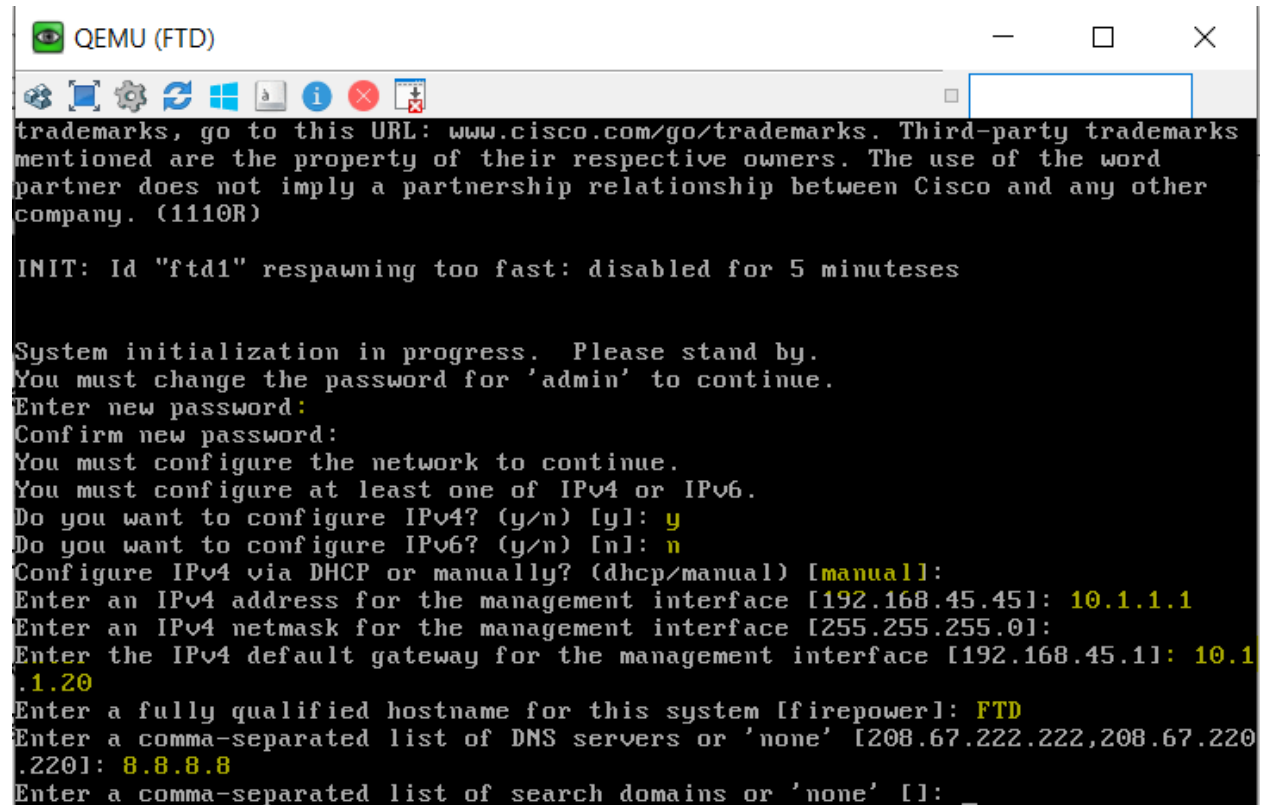

```
QEMU (FTD)
trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks
mentioned are the property of their respective owners. The use of the word
partner does not imply a partnership relationship between Cisco and any other
company. (1110R)

INIT: Id "ftd1" respawning too fast: disabled for 5 minuteses


System initialization in progress. Please stand by.
You must change the password for 'admin' to continue.
Enter new password:
Confirm new password:
You must configure the network to continue.
You must configure at least one of IPv4 or IPv6.
Do you want to configure IPv4? (y/n) [y]: y
Do you want to configure IPv6? (y/n) [n]: n
Configure IPv4 via DHCP or manually? (dhcp/manual) [manual]:
Enter an IPv4 address for the management interface [192.168.45.45]: 10.1.1.1
Enter an IPv4 netmask for the management interface [255.255.255.0]:
Enter the IPv4 default gateway for the management interface [192.168.45.11]: 10.1.1.20
Enter a fully qualified hostname for this system [firepower1]: FTD
Enter a comma-separated list of DNS servers or 'none' [208.67.222.222,208.67.220.220]: 8.8.8.8
Enter a comma-separated list of search domains or 'none' []: _
```

Manage the device locally type **no** & configure firewall mode type enter to choose **routed** mode

```
Manage the device locally? (yes/no) [yes]: no
Configure firewall mode? (routed/transparent) [routed]:
Configuring firewall mode ...
```

Command to see full Information related to Network.

#show network

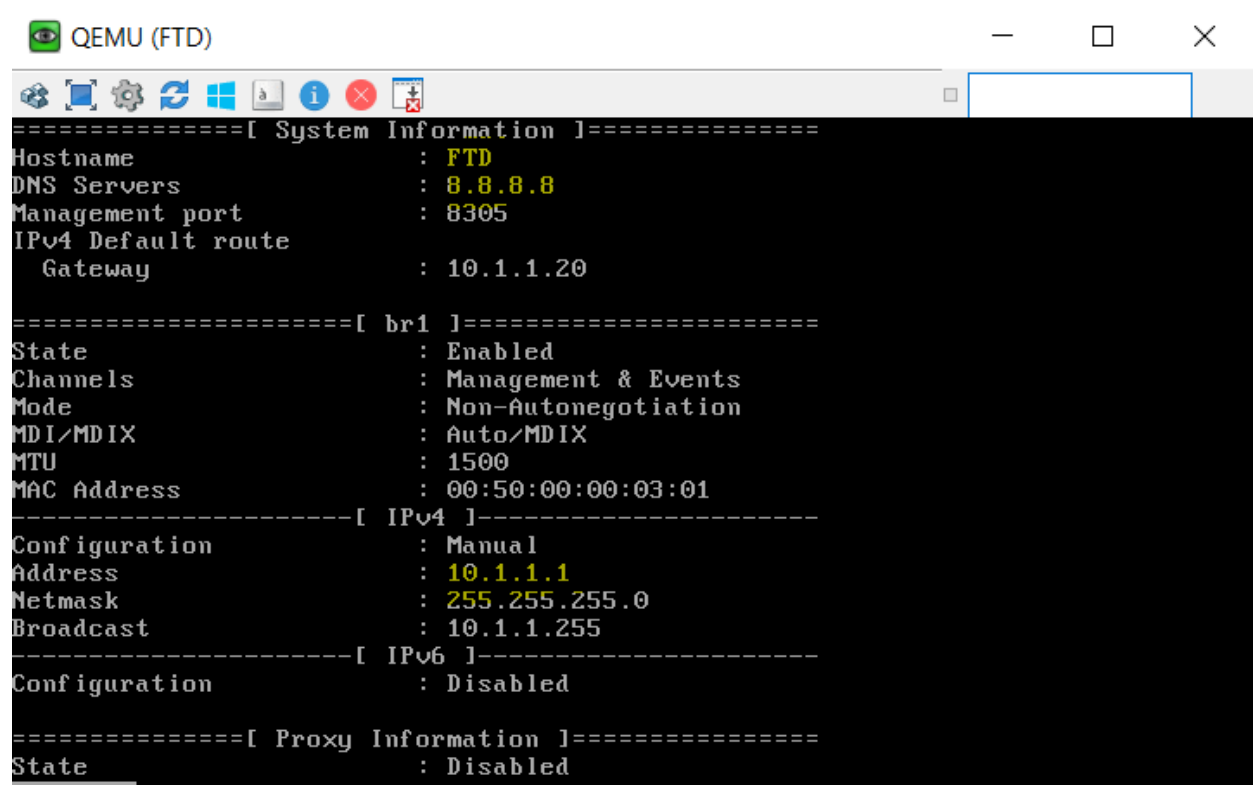

```
===== [ System Information ] =====
Hostname           : FTD
DNS Servers        : 8.8.8.8
Management port    : 8305
IPv4 Default route : 10.1.1.20
Gateway            : 10.1.1.20


===== [ br1 ] =====
State              : Enabled
Channels           : Management & Events
Mode               : Non-Autonegotiation
MDI/MDIX           : Auto/MDIX
MTU                : 1500
MAC Address        : 00:50:00:00:03:01

----- [ IPv4 ] -----
Configuration      : Manual
Address            : 10.1.1.1
Netmask            : 255.255.255.0
Broadcast          : 10.1.1.255

----- [ IPv6 ] -----
Configuration      : Disabled

===== [ Proxy Information ] =====
State              : Disabled
```


Checking Connectivity Between Cisco FTD and other devices

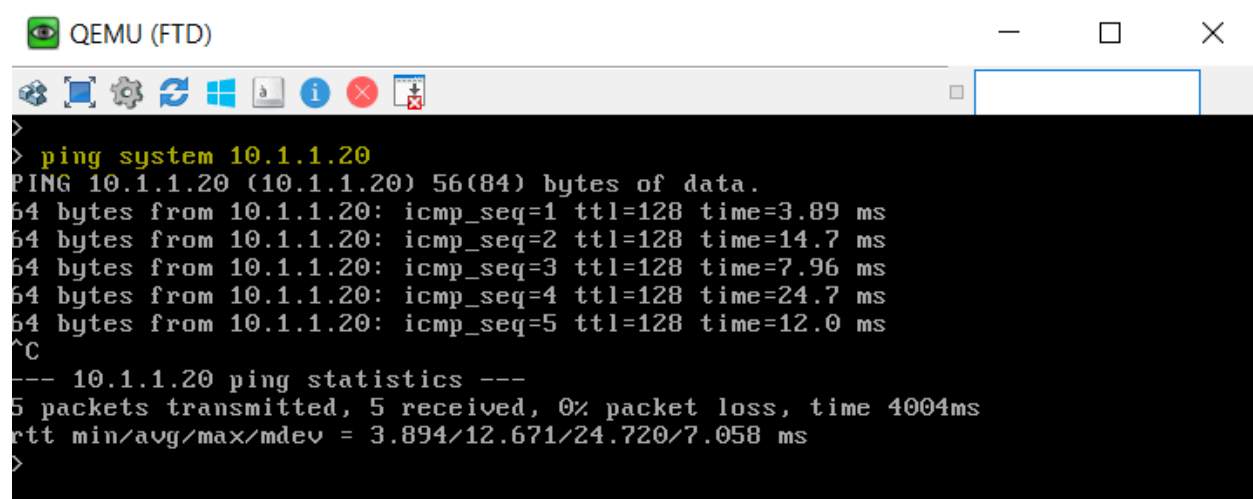

```
>
> ping system 10.1.1.20
PING 10.1.1.20 (10.1.1.20) 56(84) bytes of data.
64 bytes from 10.1.1.20: icmp_seq=1 ttl=128 time=3.89 ms
64 bytes from 10.1.1.20: icmp_seq=2 ttl=128 time=14.7 ms
64 bytes from 10.1.1.20: icmp_seq=3 ttl=128 time=7.96 ms
64 bytes from 10.1.1.20: icmp_seq=4 ttl=128 time=24.7 ms
64 bytes from 10.1.1.20: icmp_seq=5 ttl=128 time=12.0 ms
^C
--- 10.1.1.20 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4004ms
rtt min/avg/max/mdev = 3.894/12.671/24.720/7.058 ms
>
```


Add Manager

Command to see manager on Cisco FTD: **#show managers**

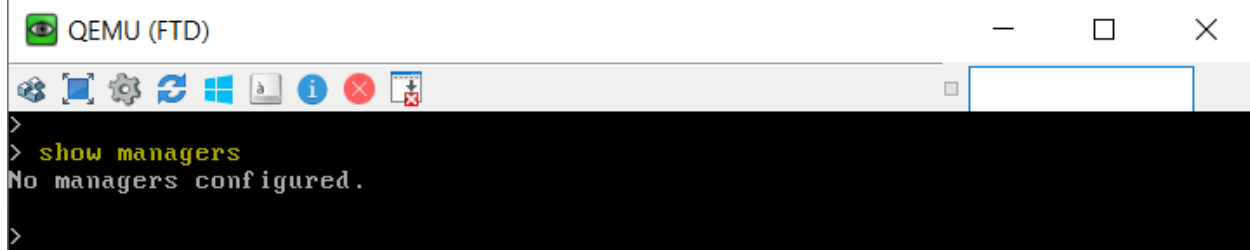

```
QEMU (FTD)
>
> show managers
No managers configured.
>
```

Configure manager using following command: **#configure manager add 10.1.1.10 cisco**

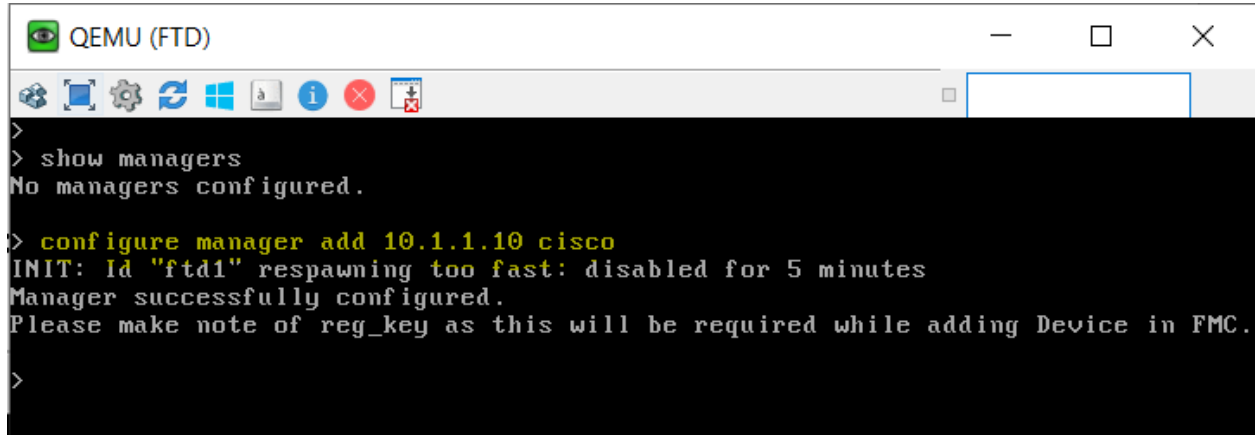


```
QEMU (FTD)
>
> show managers
No managers configured.
> configure manager add 10.1.1.10 cisco
INIT: Id "ftd1" respawning too fast: disabled for 5 minutes
Manager successfully configured.
Please make note of reg_key as this will be required while adding Device in FMC.
>
```

FMC (Firepower Management Center) Configuration:

Login Firepower FMC(Firepower Management Center)

Login to FMC with default username (**admin**) and Default password: **Admin123**

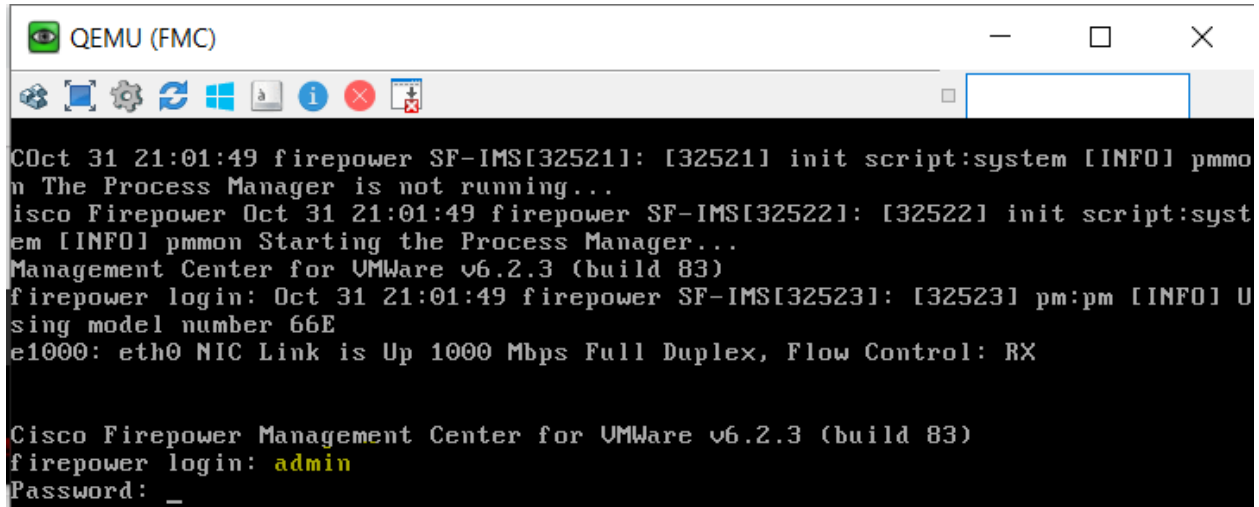


```
QEMU (FMC)
Oct 31 21:01:49 firepower SF-IMS[32521]: [32521] init script:system [INFO] pmmon The Process Manager is not running...
Cisco Firepower Oct 31 21:01:49 firepower SF-IMS[32522]: [32522] init script:system [INFO] pmmon Starting the Process Manager...
Management Center for VMWare v6.2.3 (build 83)
firepower login: Oct 31 21:01:49 firepower SF-IMS[32523]: [32523] pm:pm [INFO] Using model number 66E
e1000: eth0 NIC Link is Up 1000 Mbps Full Duplex, Flow Control: RX

Cisco Firepower Management Center for VMWare v6.2.3 (build 83)
firepower login: admin
Password: _
```

Enter command: **# sudo configure-network**, enter password: **Admin123**

Enter "y" key and press enter button.

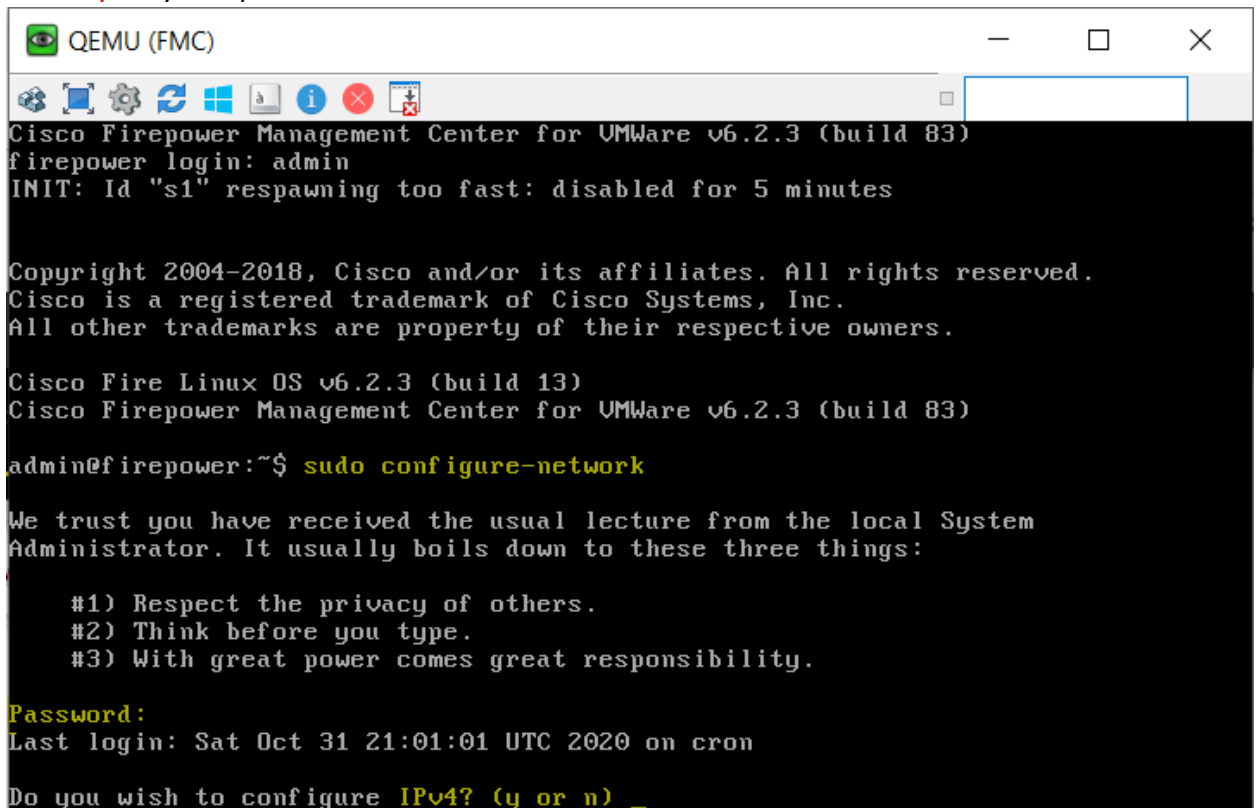

```
QEMU (FMC)
Cisco Firepower Management Center for VMWare v6.2.3 (build 83)
firepower login: admin
INIT: Id "s1" respawning too fast: disabled for 5 minutes

Copyright 2004-2018, Cisco and/or its affiliates. All rights reserved.
Cisco is a registered trademark of Cisco Systems, Inc.
All other trademarks are property of their respective owners.

Cisco Fire Linux OS v6.2.3 (build 13)
Cisco Firepower Management Center for VMWare v6.2.3 (build 83)

admin@firepower:~$ sudo configure-network

We trust you have received the usual lecture from the local System
Administrator. It usually boils down to these three things:

    #1) Respect the privacy of others.
    #2) Think before you type.
    #3) With great power comes great responsibility.

Password:
Last login: Sat Oct 31 21:01:01 UTC 2020 on cron

Do you wish to configure IPv4? (y or n) _
```

Enter Management IP address: **10.1.1.10** and Enter Management netmask: **255.255.255.0**
Enter default gateway: **10.1.1.20** and Confirm the settings are correct by pressing "y" and press enter key and For IPv6 press "n" key.

```
QEMU (FMC)
admin@firepower:~$ sudo configure-network

We trust you have received the usual lecture from the local System
Administrator. It usually boils down to these three things:

    #1) Respect the privacy of others.
    #2) Think before you type.
    #3) With great power comes great responsibility.

Password:
Last login: Sat Oct 31 21:01:01 UTC 2020 on cron

Do you wish to configure IPv4? (y or n) y

Management IP address? [192.168.45.45] 10.1.1.10
Management netmask? [255.255.255.0]
Management default gateway? 10.1.1.20

Management IP address?      10.1.1.10
Management netmask?        255.255.255.0
Management default gateway? 10.1.1.20

Are these settings correct? (y or n) y

Do you wish to configure IPv6? (y or n) n_
```


Check connectivity with Cisco FTD and FMC

Check connectivity between FMC and FTD

```
admin@firepower:~$ sudo ping 10.1.1.1
Password:
Last login: Sat Oct 31 21:04:37 UTC 2020 on tty1
PING 10.1.1.1 (10.1.1.1) 56(84) bytes of data.
64 bytes from 10.1.1.1: icmp_req=1 ttl=64 time=4.64 ms
64 bytes from 10.1.1.1: icmp_req=2 ttl=64 time=15.6 ms
64 bytes from 10.1.1.1: icmp_req=3 ttl=64 time=5.45 ms
64 bytes from 10.1.1.1: icmp_req=4 ttl=64 time=5.41 ms
64 bytes from 10.1.1.1: icmp_req=5 ttl=64 time=5.54 ms
^C
--- 10.1.1.1 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4006ms
rtt min/avg/max/mdev = 4.640/7.330/15.609/4.152 ms
admin@firepower:~$
```


Login FMC on Web Browser

Enter url <https://10.1.1.10> and press the "Proceed to 10.1.1.10". Enter Username (**admin**) and Password (**Admin123**) and click on Login button.

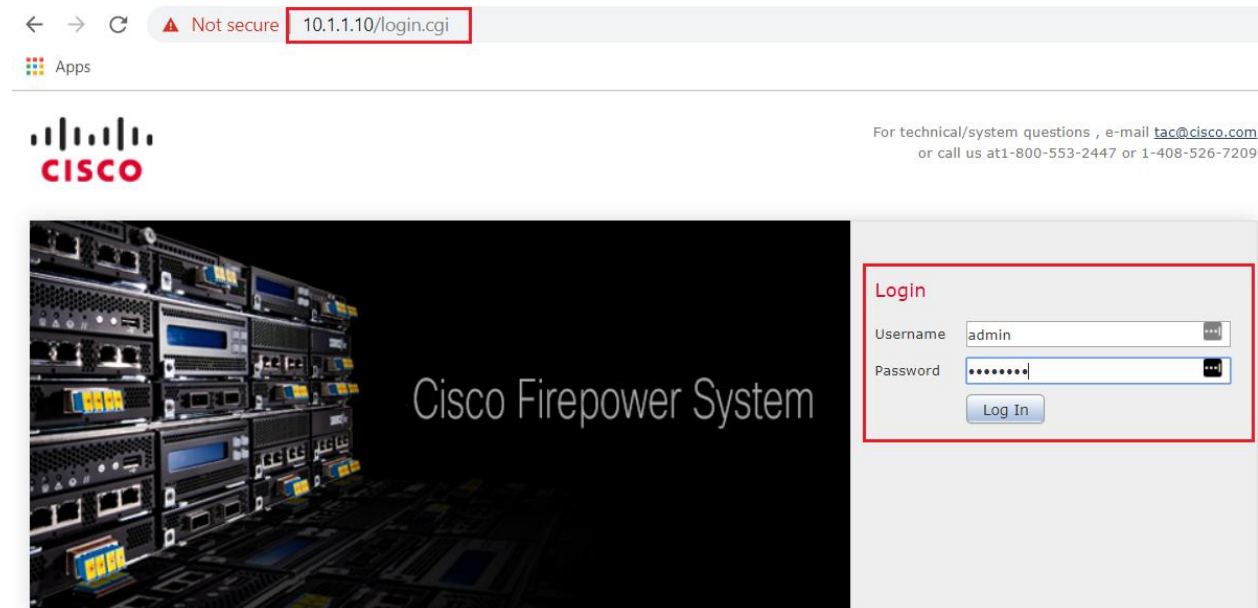


Change FMC Default Password

Enter New Password: **Abc@123** and Confirm: **Abc@123**

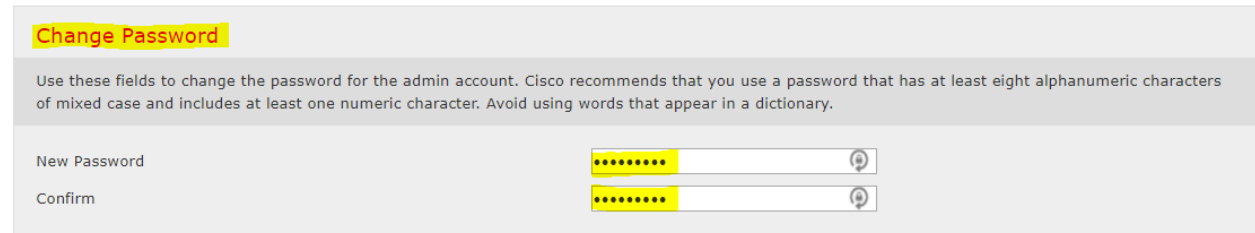

Network Settings, Enter Network Settings

Hostname: FMC, Domain: **google.com** and Primary DNS Server: **8.8.8.8**

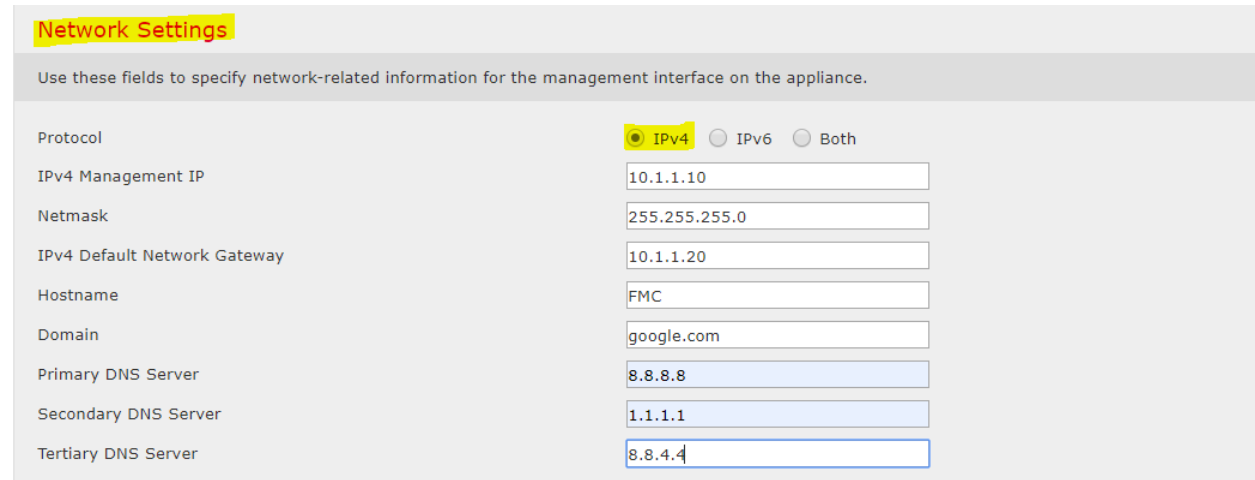

Configure Time Settings:

Set My clock: Manually and Set display Time Zone: **Asia/Riyadh**

Time Settings

Use these fields to specify how you want to set the time for the Defense Center.

Set My Clock	☒ Via NTP from 0.sourcefire.pool.ntp.org, 1.sourcefir
	☐ Manually
Current Time	2020-11-01 00:22
Set Display Time Zone	Asia/Riyadh

Accept End User License Agreement and click on apply

End User License Agreement

The parties specifically disclaim the application of the UN Convention on Contracts for the International Sale of Goods. In addition, no person who is not a party to the EULA shall be entitled to enforce or take the benefit of any of its terms under the Contracts (Rights of Third Parties) Act 1999. Regardless of the above governing law, either party may seek interim injunctive relief in any court of appropriate jurisdiction with respect to any alleged breach of such party's intellectual property or proprietary rights.

18. **Integration.** If any portion of this EULA is found to be void or unenforceable, the remaining provisions of the EULA shall remain in full force and effect. Except as expressly stated or as expressly amended in a signed agreement, the EULA constitutes the entire agreement between the parties with respect to the license of the Software and supersedes any conflicting or additional terms contained in any purchase order or elsewhere, all of which terms are excluded. The parties agree that the English version of the EULA will govern in the event of a conflict between it and any version translated into another language.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: www.cisco.com/go/trademarks. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)

☒ I have read and agree to the End User License Agreement.

Apply

Summary Dashboard

Once all details are configured, FMC device takes few minutes and Summary Dashboard will appear on MGMT PC.

← → ↻ ⚠ Not secure 10.1.1.10/dashboard/view.cgi?id=ba03a9f8-1bba-11eb-b8d4-a3b471f235bc

Apps

Overview Analysis Policies Devices Objects AMP Intelligence

Dashboards ▾ Reporting Summary ▾


Summary Dashboard
Provides a summary of activity on the appliance

Network × Threats × Intrusion Events × Status × Geolocation × QoS × +


Unique Applications over Time - × Top Web Applications Seen

Enable Evaluation Mode

Go to **System > Licenses > Smart Licenses**

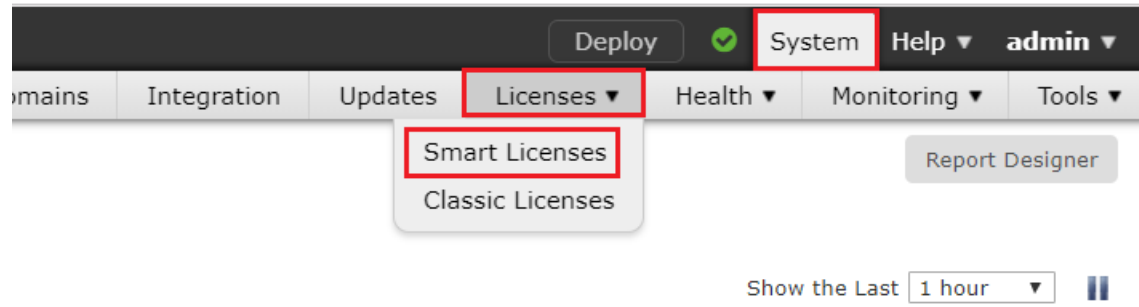

Click on "**evaluation Mode**" button to activate and Click "**Yes**" button.

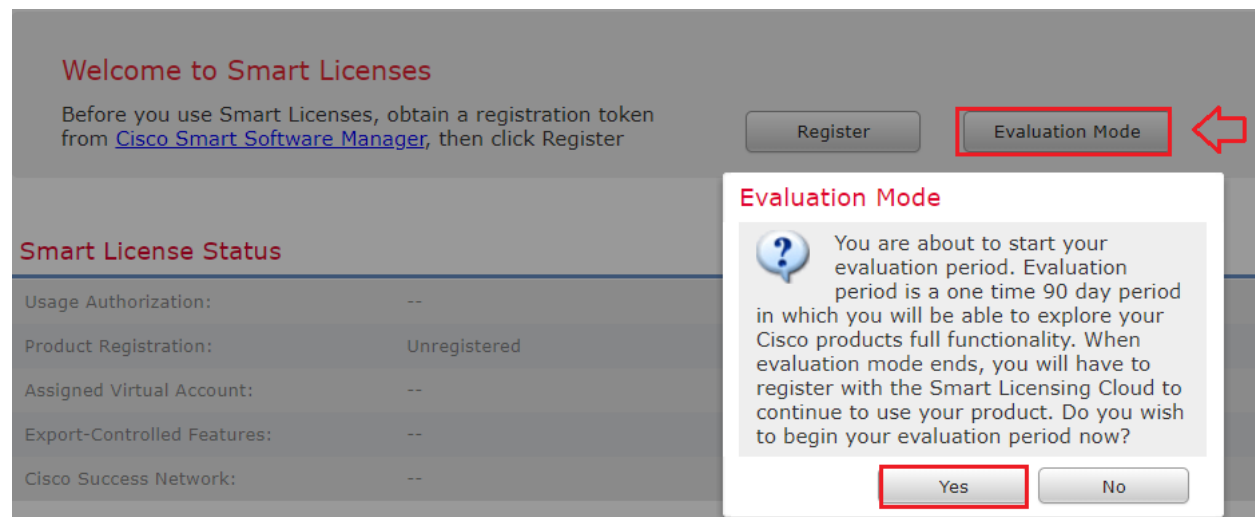

Evaluation Mode Enabled Successfully

Smart License Status


[Cisco Smart Software Manager](#)

Usage Authorization:	N/A
Product Registration:	Evaluation Period (Expires in 89 days)
Assigned Virtual Account:	Evaluation Mode
Export-Controlled Features:	Disabled
Cisco Success Network:	Disabled


Smart Licenses

Integrate FTD (Firepower Threat Defense) with FMC:


Go to **FMC > Devices > Add > Devices**



ed on the Firepower Management Center.

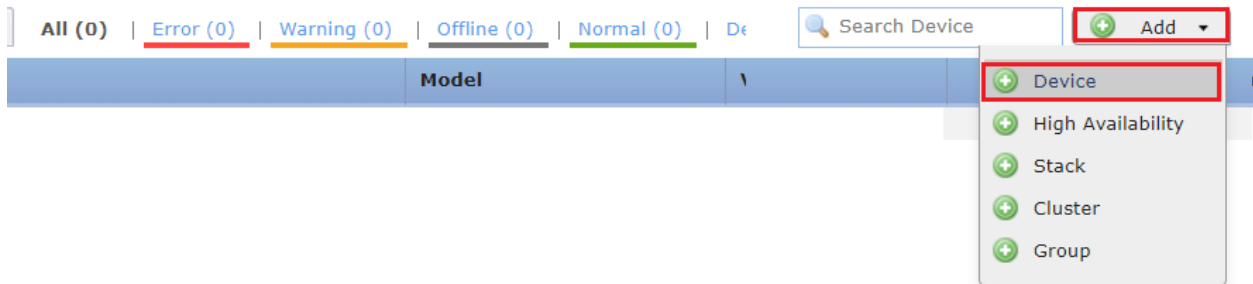

Enter device details and create a new policy ("**Block-Policy**").

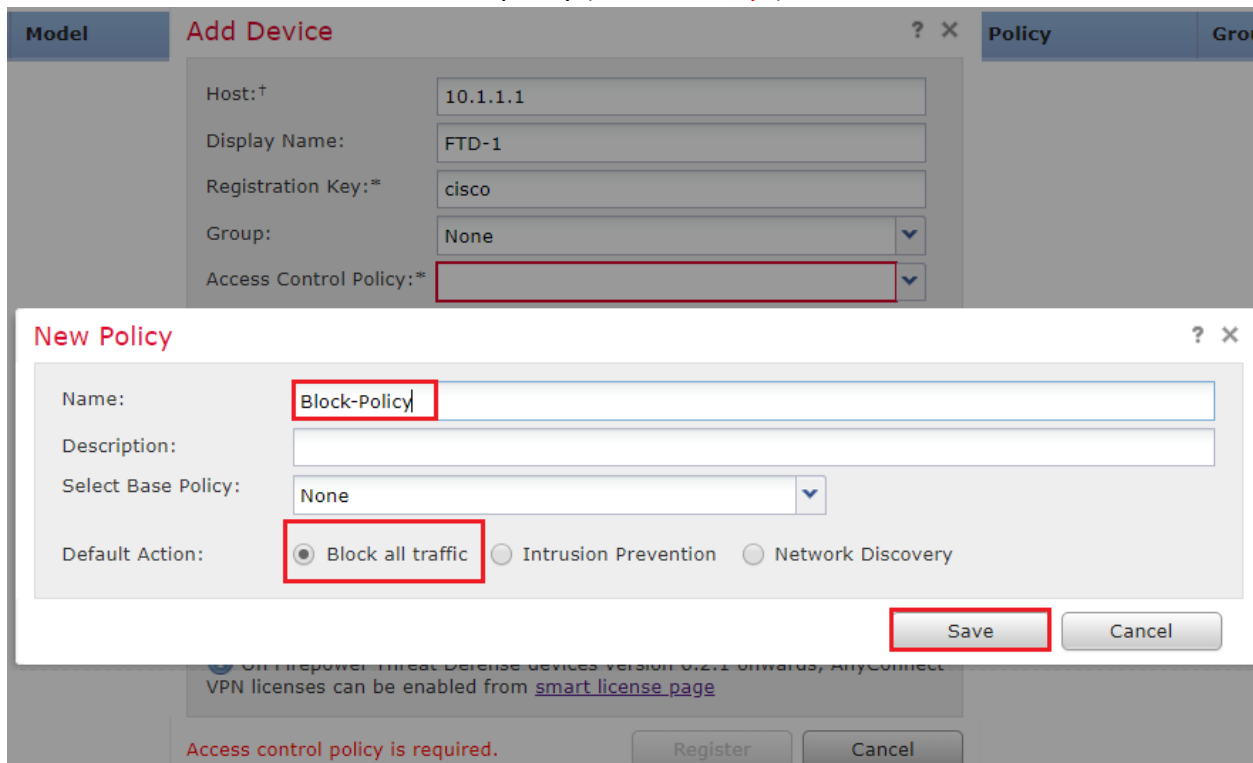

Click on "Register" button

Add Device

Host:† 10.1.1.1

Display Name: FTD-1

Registration Key:* cisco

Group: None

Access Control Policy:* Block-Policy

Smart Licensing

Malware: ☒

Threat: ☒

URL Filtering: ☒

Advanced


Unique NAT ID:†

Transfer Packets: ☒

On Firepower Threat Defense devices version 6.2.1 onwards, AnyConnect VPN licenses can be enabled from [smart license page](#)

Register Cancel

Integration in progress

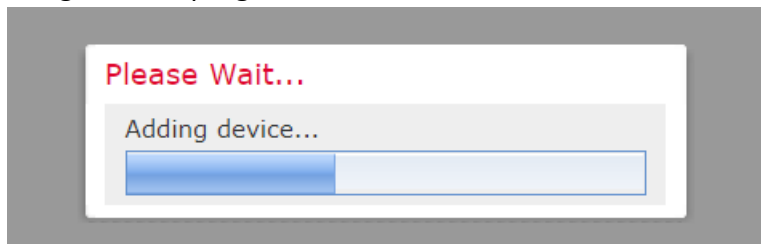

Deploy  System Help admin

Deployments Health **Tasks**  ?

5 total 0 waiting 1 running 0 retrying 4 success 0 failures

-  **Health Policy** 37s 

Apply Initial_Health_Policy 2020-10-31 20:51:29 to FTD-1
Health Policy applied successfully
-  **Policy Pre-Deployment** 1m 10s

Pre-deploy Global Configuration Generation
Start snapshot
-  **Discovery** 3m 3s 

FTD-1 - Discovery from the device is successful.
-  **Register** 1m 29s 

Registration
Communication with FTD-1 has been established, discovery in progress
-  **SRU Install** 14m 29s 

Snort Rule Update 2017 09 13 001 vrt
Install Completed

No more messages to fetch.

[Remove all completed tasks.](#)

FTD Deployed Successfully

Overview Analysis Policies **Devices** Objects AMP Intelligence

Device Management NAT VPN QoS Platform Settings FlexConfig Certificates

Device Management

List of all the devices currently registered on the Firepower Management Center.

View By : All (1) | Error (0) | Warning (0) | Offline (0) | Normal (1) | Deployment Pending (1)

Name	Model	Version	Licenses
 Ungrouped (1)			
 FTD-1 10.1.1.1 - Routed	Cisco Firepower Threat Defense for KVM	6.2.3	Base, Threat, Malware, URL Filtering