[深圳市宇芯数码技术有限公司 sunjb de-05@worldchip.cn]
[2026-03-25 Info]

在开发过程在，对sdk做完修改，正常编译完成固件后，需要做版本迭代时，要发布新版本的OTA升级包前，先按照以下步骤配置当前的版本信息。

打包ota升级包前，修改sdk如下位置的版本配置

sw-description-ab 文件中需要修改3处版本信息

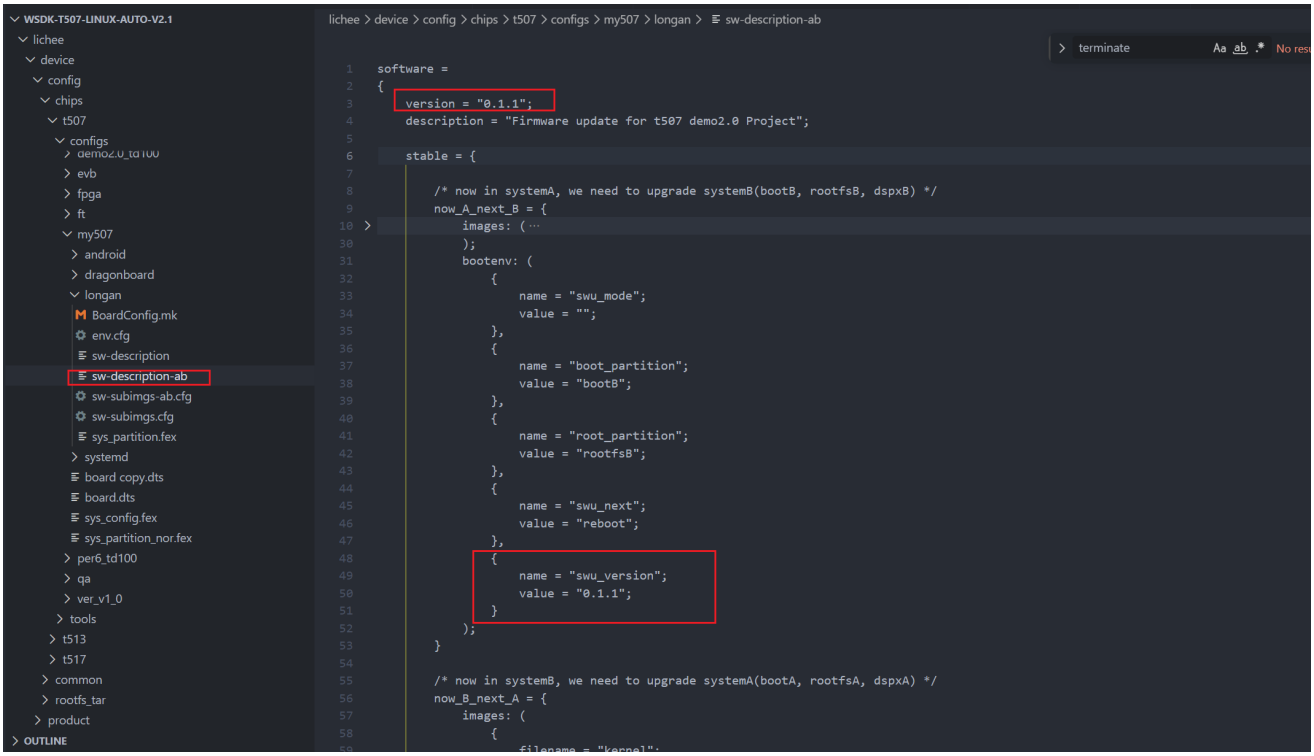

lichee > device > config > chips > t507 > configs > my507 > longan > sw-description-ab

```
2   {
6       stable = {
56          now_B_next_A = {
57              images: (
63                  {
64                      filename = "rootfs";
65                      device = "/dev/by-name/rootfsA";
66                      installed-directly = true;
67                  }
68                  /*,
69                  {
70                      filename = "uboot";
71                      type = "awuboot";
72                  },
73                  {
74                      filename = "boot0";
75                      type = "awboot0";
76                  }*/
77              );
78              bootenv: (
79                  {
80                      name = "swu_mode";
81                      value = "";
82                  },
83                  {
84                      name = "boot_partition";
85                      value = "bootA";
86                  },
87                  {
88                      name = "root_partition";
89                      value = "rootfsA";
90                  },
91                  {
92                      name = "swu_next";
93                      value = "reboot";
94                  },
95                  {
96                      name = "swu_version";
97                      value = "0.1.1";
98                  }
99              );
100         }
101     }
```

注意最后这里不要填写，为清空用途

lichee > device > config > chips > t507 > configs > my507 > longan > sw-description-ab

```
2   {
102
103     /* when not call with -e xxx,xxx    just clean */
104     bootenv: (
105         {
106             name = "swu_param";
107             value = "";
108         },
109         {
110             name = "swu_software";
111             value = "";
112         },
113         {
114             name = "swu_mode";
115             value = "";
116         },
117         {
118             name = "swu_version";
119             value = "";
120         }
121     );
122
123 }
124
```

env.cfg中同样配置好版本信息

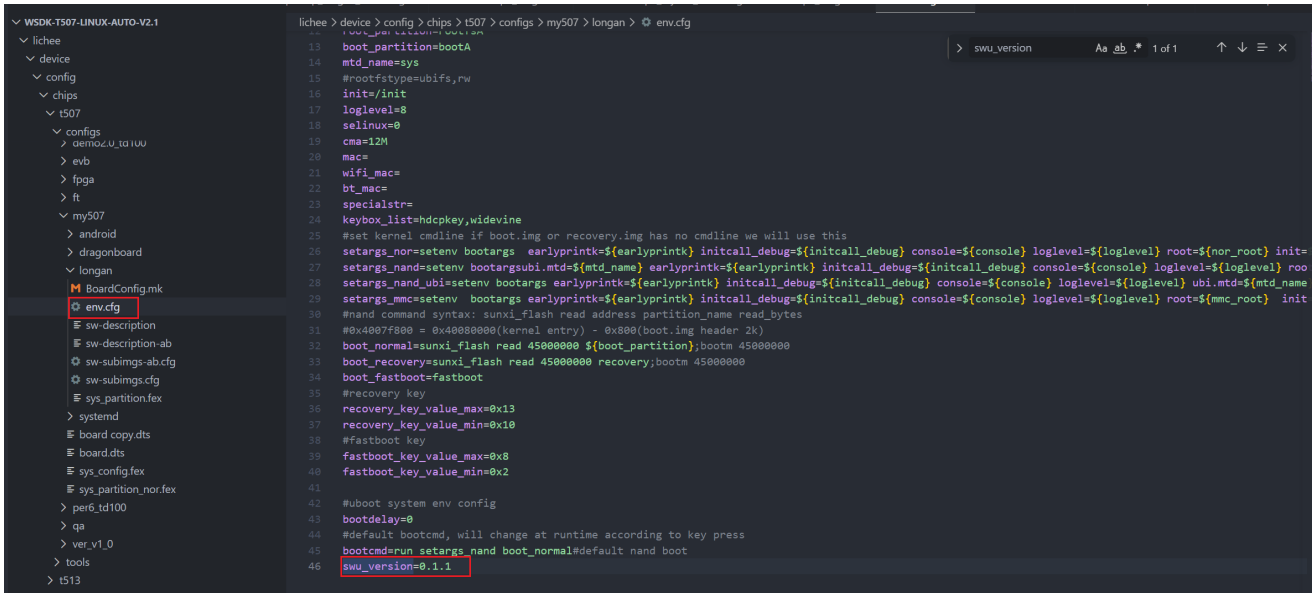

在sdk目录执行命令 打包 ota升级包，得到swu后缀的升级包

```
pack finish
binj@compile:~/t507/WSDK-T507-Linux-Auto-V2.1/lichee$ swupdate_pack_swu -ab
####/home/binj/t507/WSDK-T507-Linux-Auto-V2.1/lichee/device/config/chips/t507/configs/my507/longan/sw-subimgs-ab.cfg####
/home/binj/t507/WSDK-T507-Linux-Auto-V2.1/lichee/device/config/chips/t507/configs/my507/longan/sw-description-ab:sw-description
/home/binj/t507/WSDK-T507-Linux-Auto-V2.1/lichee/out/pack_out/boot.fex:kernel
/home/binj/t507/WSDK-T507-Linux-Auto-V2.1/lichee/out/pack_out/rootfs.fex:rootfs

-------------------- config --------------------
subimgs config by: /home/binj/t507/WSDK-T507-Linux-Auto-V2.1/lichee/device/config/chips/t507/configs/my507/longan/sw-subimgs-ab.c
fg
out dir: /home/binj/t507/WSDK-T507-Linux-Auto-V2.1/lichee/out/t507/my507/longan/swupdate
-------------------- do copy --------------------
-------------------- do sha256 --------------------
-------------------- do md5sum --------------------
891657023311f13a523abca1b7505252  sw-description
d5dc8f1aa29868dd1afeb1184afb4ea8  kernel
b992c0cf7214eb5b9c901789d04260f9  rootfs
-------------------- do cpio --------------------
sw-description
kernel
rootfs
cpio_item_md5
499094 blocks
-------------------- out file in --------------------


/home/binj/t507/WSDK-T507-Linux-Auto-V2.1/lichee/out/t507/my507/longan/swupdate/t507_my507-ab.swu

244M    /home/binj/t507/WSDK-T507-Linux-Auto-V2.1/lichee/out/t507/my507/longan/swupdate/t507_my507-ab.swu
```

将升级包拷贝到U盘，插入设备，即可使用提供的自动升级脚本进行自动OTA升级

功能：

1、自动对比版本信息，升级包小于等于当前系统时不进行升级

2、自动确认当前系统是A还是B系统，自动进行系统AB系统升级切换

应用使用时后台调用/etc/ota.sh 脚本，传递固件路径即可

如 /etc/ota.sh /mnt/usb/sda1/t507_my507-ab.swu

```
root@my507:/# /etc/ota.sh /mnt/UDISK/t507_my507-ab.swu
[OTA] ===== OTA START =====
[OTA] SWU file: /mnt/UDISK/t507_my507-ab.swu
[OTA] Current partition: bootB
[OTA] Current version: 0.1.0
[OTA] Parsed new version: 0.1.1
[OTA] Upgrade: B -> A
[OTA] Running swupdate...
Swupdate v2018.11.0

Licensed under GPLv2. See source distribution for detailed copyright notices.

Registered handlers:
        dummy
        awuboot
        awboot0
        uboot
        bootloader
        raw
        rawfile
software set: stable mode: now_B_next_A
Software updated successfully
Please reboot the device to start the new software
[INFO ] : SWUPDATE successful !
[OTA] Upgrade success
[OTA] Updated version to 0.1.1
[OTA] Rebooting...
root@my507:/# Stopping telnetd: OK
Stopping system message bus: done
Saving random seed... done.
Stopping klogd: OK
Stopping syslogd: OK
umount: can't remount adb read-only
umount: devtmpfs busy - remounted read-only
[  445.463180] EXT4-fs (mmcblk0p6): re-mounted. Opts: (null)
The system is going down NOW![  445.474118] android_work: sent uevent USB_STATE=DISCONNECTED

Sent SIGTERM to all processes
```