(a) Full-image baseline

(b) ReasonLink Milestone 1: base in DRAM

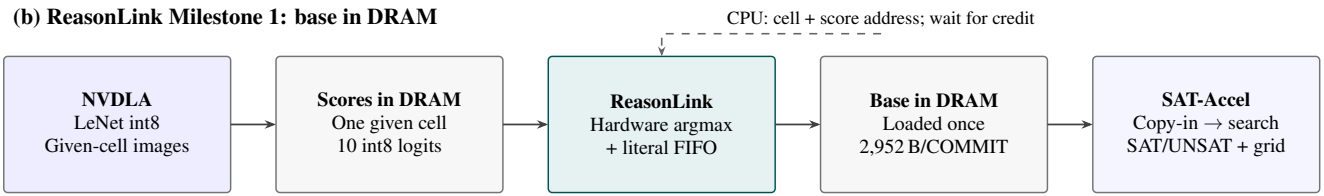

Serial: prepare i, then solve i. **Double-buffered:** prepare $i{+}1$ while solving i; two image buffers.

Milestone 1 still reloads the full image each solve. Milestone 2: base on chip + state rollback.