

# **XDigiPlaybackCore Interface**

**For Digifort 7.2.1.0**

# Index

|                                             |           |
|---------------------------------------------|-----------|
| <b>Part I Overview</b>                      | <b>5</b>  |
| 1 Description.....                          | 5         |
| 2 History.....                              | 5         |
| <b>Part II Data types</b>                   | <b>7</b>  |
| 1 Enumerated types (enums).....             | 7         |
| TxServerConnectionMethod .....              | 7         |
| TxPlaybackDirection .....                   | 7         |
| TxPlaybackSpeed .....                       | 7         |
| TxCameraDescriptionType .....               | 7         |
| TxCameraResizeType .....                    | 8         |
| TxPopupMenuOption .....                     | 8         |
| <b>Part III Interface</b>                   | <b>10</b> |
| 1 Connection management.....                | 10        |
| Methods .....                               | 10        |
| AddServer.....                              | 10        |
| RemoveServer.....                           | 10        |
| RemoveServers.....                          | 11        |
| Connect .....                               | 11        |
| Disconnect.....                             | 11        |
| Events .....                                | 11        |
| OnConnectionStatus.....                     | 11        |
| 2 Cameras management.....                   | 12        |
| Methods .....                               | 12        |
| AddCamera.....                              | 12        |
| RemoveCamera.....                           | 13        |
| RemoveCameras.....                          | 13        |
| SetCameraOverlayTitleDraw Options.....      | 13        |
| SetCameraOverlayFrameInfoDraw Options ..... | 13        |
| Properties .....                            | 14        |
| CameraDescriptionType.....                  | 14        |
| CameraResizeType.....                       | 14        |
| CameraCount.....                            | 14        |
| CamerasVisible.....                         | 14        |
| CameraAudioEnabled.....                     | 15        |
| Events .....                                | 15        |
| OnCameraSelect.....                         | 15        |
| 3 Layout matrix.....                        | 15        |
| Methods .....                               | 15        |
| MatrixBlinkTitle.....                       | 15        |
| Properties .....                            | 15        |
| MatrixScreenStyle.....                      | 15        |
| MatrixTitle .....                           | 18        |
| MatrixTitleColor.....                       | 18        |

---

|                                    |           |
|------------------------------------|-----------|
| MatrixTitleBlinkColor.....         | 18        |
| MatrixBackgroundColor.....         | 18        |
| CameraBackgroundColor.....         | 19        |
| <b>4 Video playback.....</b>       | <b>19</b> |
| <b>Methods .....</b>               | <b>19</b> |
| OpenPlaybackMediaSession.....      | 19        |
| Play .....                         | 19        |
| Pause .....                        | 20        |
| Resume .....                       | 20        |
| Stop .....                         | 20        |
| Seek .....                         | 20        |
| NextFrame.....                     | 20        |
| PriorFrame.....                    | 20        |
| ChangeSpeed .....                  | 20        |
| <b>Properties .....</b>            | <b>21</b> |
| FrameSyncTime.....                 | 21        |
| <b>Events .....</b>                | <b>21</b> |
| OnFrameSyncTime.....               | 21        |
| <b>5 Options.....</b>              | <b>21</b> |
| SetPopupMenuOption .....           | 21        |
| <b>6 Localization.....</b>         | <b>21</b> |
| <b>Properties .....</b>            | <b>21</b> |
| LanguageID.....                    | 22        |
| <b>Part IV Usage example .....</b> | <b>24</b> |
| <b>Index .....</b>                 | <b>0</b>  |

# Part



# 1 Overview

## 1.1 Description



This document specifies the interface of ActiveX XDigiPlaybackCore control.

This ActiveX control allows the playback of recorded video and provides functionalities to externally control the playback.

## 1.2 History

| Version | Date        | Revision              | Comments                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------|-------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6.7.0.0 | 2013-Jun-20 | Francisco Luiz Zanini | First version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 6.7.0.0 | 2014-Jan-27 | Francisco Luiz Zanini | <ul style="list-style-type: none"><li>Added the property <a href="#">FrameSyncTime</a> to retrieve the date and time of the current frame.</li><li>Added the event <a href="#">OnFrameSyncTime</a> to receive the date and time of the current frame.</li><li>Added the event <a href="#">OnConnectionStatus</a> to receive connection information of the servers.</li><li>Added the event <a href="#">OnCameraSelect</a> to receive the selected camera index in object matrix.</li><li>Added the property <a href="#">LanguageID</a> to change the language.</li><li>Added the method <a href="#">SetPopupMenuOption</a> to set the popup menu options.</li></ul> |

# Part



## 2 Data types

This section describes the data types used throughout the ActiveX control.

### 2.1 Enumerated types (enums)

This section describes the enumerated types (enums) used by the ActiveX control.

#### 2.1.1 TxServerConnectionMethod

This type defines the server connection method.

| Value       | Description                         |
|-------------|-------------------------------------|
| cmxInternal | Internal connection (Local network) |
| cmxExternal | External connection (Internet)      |

#### 2.1.2 TxPlaybackDirection

This type defines the direction of playback.

| Valor       | Descrição               |
|-------------|-------------------------|
| pdxForward  | Play the video forward  |
| pdxBackward | Play the video backward |

#### 2.1.3 TxPlaybackSpeed

This type defines the playback speed.

| Valor    | Descrição                          |
|----------|------------------------------------|
| psxS512x | Playback the video 512x slower     |
| psxS256x | Playback the video 256x slower     |
| psxS128x | Playback the video 128x slower     |
| psxS64x  | Playback the video 64x slower      |
| psxS32x  | Playback the video 32x slower      |
| psxS16x  | Playback the video 16x slower      |
| psxS8x   | Playback the video 8x slower       |
| psxS4x   | Playback the video 4x slower       |
| psxS2x   | Playback the video 2x slower       |
| psx1x    | Playback the video in normal speed |
| psxF2x   | Playback the video 2x faster       |
| psxF4x   | Playback the video 4x faster       |
| psxF8x   | Playback the video 8x faster       |
| psxF16x  | Playback the video 16x faster      |
| psxF32x  | Playback the video 32x faster      |
| psxF64x  | Playback the video 64x faster      |
| psxF128x | Playback the video 128x faster     |
| psxF256x | Playback the video 256x faster     |
| psxF512x | Playback the video 512x faster     |

#### 2.1.4 TxCameraDescriptionType

This type defines how the camera description will be displayed on the top of the image.

| Value                 | Description                      |
|-----------------------|----------------------------------|
| dtxNameAndDescription | Show camera name and description |
| dtxNameOnly           | Show only camera name            |
| dtDescriptionOnly     | Show only camera description     |

### 2.1.5 TxCameraResizeType

This type defines how the image will be resized to fit the screen.

| Value      | Description                                                             |
|------------|-------------------------------------------------------------------------|
| rtxCenter  | Centralize the image (Do not resize)                                    |
| rtxStretch | Resize the image to fill the entire camera spot                         |
| rtxResize  | Resize the image to fill the camera spot, keeping the image proportions |

### 2.1.6 TxPopupMenuOption

This type defines which options will be displayed in context menus.

| Value                 | Description                                              |
|-----------------------|----------------------------------------------------------|
| pmoSaveCameraSnapshot | Enable or disable the option to save snapshot of cameras |

# Part



### 3 Interface

This section describes the ActiveX interface.

#### 3.1 Connection management

This section describes the methods and properties to manage connections with the servers.

##### 3.1.1 Methods

This section describes the methods for server connection management.

###### 3.1.1.1 AddServer

This ActiveX control can connect to many servers at the same time, use this method to add the servers for connection.

| Parameter        | Type                                     | Description                                                                                                                     | Direction |
|------------------|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-----------|
| ServerName       | String                                   | Server name - This name identifies the server throughout the control, it will be used to reference the server in other methods. | Input     |
| Address          | String                                   | Server address                                                                                                                  | Input     |
| Port             | Integer                                  | Server port                                                                                                                     | Input     |
| Username         | String                                   | Authentication username                                                                                                         | Input     |
| Password         | String                                   | Authentication password                                                                                                         | Input     |
| ConnectionMethod | <a href="#">TxServerConnectionMethod</a> | Method of connection                                                                                                            | Input     |

###### Method result:

| Boolean | Description                  |
|---------|------------------------------|
| TRUE    | Server added successfully    |
| FALSE   | Error upon adding the server |

**Example:** Add the server "Server1" with internal connection.

```
AddServer('Server', '192.168.0.1', 8600, 'admin', 'password',
           cmxInternal);
```

###### 3.1.1.2 RemoveServer

This method removes a server from the management and disconnects from it

| Parameter  | Type   | Description                                                                                         | Direction |
|------------|--------|-----------------------------------------------------------------------------------------------------|-----------|
| ServerName | String | Server name. This must be the name that was used when server was added by <a href="#">AddServer</a> | Method    |

###### Method result:

| Boolean | Description                 |
|---------|-----------------------------|
| TRUE    | Server removed successfully |
| FALSE   | Error upon removing server  |

**Example:** Remove the server "Server1":

```
RemoveServer('Server1');
```

### 3.1.1.3 RemoveServers

This method will remove and disconnect from all servers

**Method result:**

| Boolean | Description                     |
|---------|---------------------------------|
| TRUE    | Servers removed successfully    |
| FALSE   | Error upon removing the servers |

**Example:**

```
RemoveServers;
```

### 3.1.1.4 Connect

This method will connect to all servers that were previously added.  
Before running this methods, make sure to add the servers by using the command [AddServer](#).

| Parameter         | Type    | Description                                                                                        | Direction |
|-------------------|---------|----------------------------------------------------------------------------------------------------|-----------|
| AutoReconnect     | Boolean | Reconnect to the server if the connection is lost.                                                 | Input     |
| WaitForConnection | Boolean | Wait connecting to all servers before returning the control back to the application (Synchronous). | Input     |

**Method result:**

| Boolean | Description                      |
|---------|----------------------------------|
| TRUE    | Servers connected successfully   |
| FALSE   | Error upon connecting to servers |

**Example:** Connect to the added servers, reconnect in case of lost connection and wait for connections to be established.

```
Connect(TRUE, TRUE);
```

### 3.1.1.5 Disconnect

This method will disconnect from all servers

**Example:**

```
Disconnect;
```

## 3.1.2 Events

This section describes the events for server connection management.

### 3.1.2.1 OnConnectionStatus

Use the event to receive the connection status of the servers.  
The servers must be added using the command [AddServer](#).

| Parameters | Type    | Description | Direction |
|------------|---------|-------------|-----------|
| Server     | String  | Server name | Input     |
| Status     | Integer | Status code | Input     |
| Msg        | String  | Message     | Input     |

Possíveis valores do código de status:

| Código | Descrição                |
|--------|--------------------------|
| 0      | Empty                    |
| 1      | Connecting               |
| 2      | Connection error         |
| 3      | Authenticating           |
| 4      | Authenticated            |
| 5      | Invalid authentication   |
| 6      | Invalid version          |
| 7      | Login cancelled          |
| 8      | Connection cancelled     |
| 9      | Disconnected by server   |
| 10     | Login time not allowed   |
| 11     | IP address not allowed   |
| 12     | Blocked account          |
| 13     | Expired account          |
| 14*    | Server full              |
| 15     | Completed                |
| 16     | Server limit was reached |
| 100    | Downloading objects      |

\*Deprecated values

## 3.2 Cameras management

This section describes the methods and properties to manage on-screen cameras.

### 3.2.1 Methods

This section describes the methods for managing on-screen cameras.

#### 3.2.1.1 AddCamera

Add a new camera to the layout.

| Parameters | Type    | Description                                                                           | Direction |
|------------|---------|---------------------------------------------------------------------------------------|-----------|
| CameraName | String  | Camera name                                                                           | Input     |
| ServerName | String  | Server name. This must be the same server name specified by <a href="#">AddServer</a> | Input     |
| Spot       | Integer | Position inside the layout to display                                                 | Input     |

**Method result:**

| Boolean | Description                  |
|---------|------------------------------|
| TRUE    | Camera added successfully    |
| FALSE   | Error upon adding the camera |

**Example:** Add "Camera1" to the second spot of the matrix layout:

```
AddCamera('Camera1', 'Server1', 2);
```

### 3.2.1.2 RemoveCamera

This method will remove a camera from the specified spot.

| Parameter | Type    | Description                        | Direction |
|-----------|---------|------------------------------------|-----------|
| Spot      | Integer | Camera layout matrix spot position | Input     |

**Example:** Remove the camera from position 3 of camera matrix

```
RemoveCamera(3);
```

### 3.2.1.3 RemoveCameras

This command will remove all cameras from screen

**Example:**

```
RemoveCameras;
```

### 3.2.1.4 SetCameraOverlayTitleDrawOptions

This method will configure the title overlay that appears at the top of camera images

| Parameter         | Type    | Description                         | Direction |
|-------------------|---------|-------------------------------------|-----------|
| CameraDescription | Boolean | Show or hide the camera description | Input     |
| Timestamp         | Boolean | Show or hide the timestamp          | Input     |

If no options are activated, the overlay will be hidden.

**Example 1:** Show the camera description at top of the image

```
SetCameraOverlayTitleDrawOptions(TRUE, FALSE);
```

**Example 2:** Show the timestamp at the top of the image

```
SetCameraOverlayTitleDrawOptions(FALSE, TRUE);
```

**Example 3:** Hide the title overlay

```
SetCameraOverlayTitleDrawOptions(FALSE, FALSE);
```

### 3.2.1.5 SetCameraOverlayFrameInfoDrawOptions

This method will configure the overlay with information of the video frame that appears at the top of the camera image.

| Parameter       | Type    | Description                          | Direction |
|-----------------|---------|--------------------------------------|-----------|
| FramesPerSecond | Boolean | Show or hide the frames per second   | Input     |
| ImageResolution | Boolean | Show or hide the image resolution    | Input     |
| FrameNumber     | Boolean | Show or hide the frame number        | Input     |
| Compression     | Boolean | Show or hide the video compression   | Input     |
| Watermark       | Boolean | Show or hide the digital certificate | Input     |

If no options are activated, the overlay will be hidden.

**Example 1:** Show the frames per seconds, resolution and compression:

```
SetCameraOverlayFrameInfoDrawOptions(TRUE, TRUE, FALSE, TRUE, FALSE);
```

**Example 2:** Hide the frame info overlay:

```
SetCameraOverlayFrameInfoDrawOptions(FALSE, FALSE, FALSE, FALSE, FALSE);
```

## 3.2.2 Properties

This section describes the properties for camera management.

### 3.2.2.1 CameraDescriptionType

This property defines how the camera name and description should be displayed at the top of the camera image.

Value: [TxCameraDescriptionType](#)

**Example 1:** Show the name and description of the camera:

```
CameraDescriptionType = dtxNameAndDescription
```

**Example 2:** Show only the camera name:

```
CameraDescriptionType = dtxNameOnly
```

**Example 3:** Show only the camera description:

```
CameraDescriptionType = dtxDescriptionOnly
```

### 3.2.2.2 CameraResizeType

This property defines how the camera image will be resized on screen.

Value: [TxCameraResizeType](#)

**Example 1:** Centralize the image:

```
CameraResizeType = rtxCenter
```

**Example 2:** Resize the image to fill the entire spot:

```
CameraResizeType = rtxStretch
```

**Example 3:** Resize the screen to fill the spot keeping the image proportions:

```
CameraResizeType = rtxResize
```

### 3.2.2.3 CameraCount

This property returns the amount of cameras on screen.

Value: Integer

### 3.2.2.4 CamerasVisible

This property shows or hides all cameras on screen.

Value: Boolean

**Example 1:** Show all cameras:

```
CamerasVisible = TRUE;
```

**Example 2:** Hide all cameras:

```
CamerasVisible = FALSE;
```

### 3.2.2.5 CameraAudioEnabled

This property activates or deactivates the audio playback from all cameras.

Value: Boolean

**Example 1:** Enable audio playback:

```
CameraAudioEnabled = TRUE;
```

**Example 2:** Disable audio playback:

```
CameraAudioEnabled = FALSE;
```

## 3.2.3 Events

This section describes the events for camera management.

### 3.2.3.1 OnCameraSelect

This event is triggered when the user selects a camera in the object matrix.

| Parameters | Type    | Description                                | Direction |
|------------|---------|--------------------------------------------|-----------|
| Index      | Integer | Camera index selected in the object matrix | Input     |

## 3.3 Layout matrix

This section defines the methods and properties to control the camera layout matrix.

### 3.3.1 Methods

This section describes the methods to control the camera layout matrix.

#### 3.3.1.1 MatrixBlinkTitle

This method will blink the camera layout matrix title overlay.

| Parameters | Type    | Description                      | Direction |
|------------|---------|----------------------------------|-----------|
| Seconds    | Integer | Time that the overlay must blink | Input     |

This method must be used along with the properties: [MatrixTitle](#), [MatrixTitleColor](#) and [MatrixTitleBlinkColor](#).

**Example:** Blink the title overlay for 5 seconds:

```
MatrixBlinkTitle(5);
```

### 3.3.2 Properties

This section contains the properties to control the camera layout matrix.

#### 3.3.2.1 MatrixScreenStyle


This property defines the style of layout matrix.

Value: Integer;

In Standard, Professional and Enterprise editions it is possible to create new styles by using the Administration Client. To recover the ID of the style double click on the desired

style, as shown below:



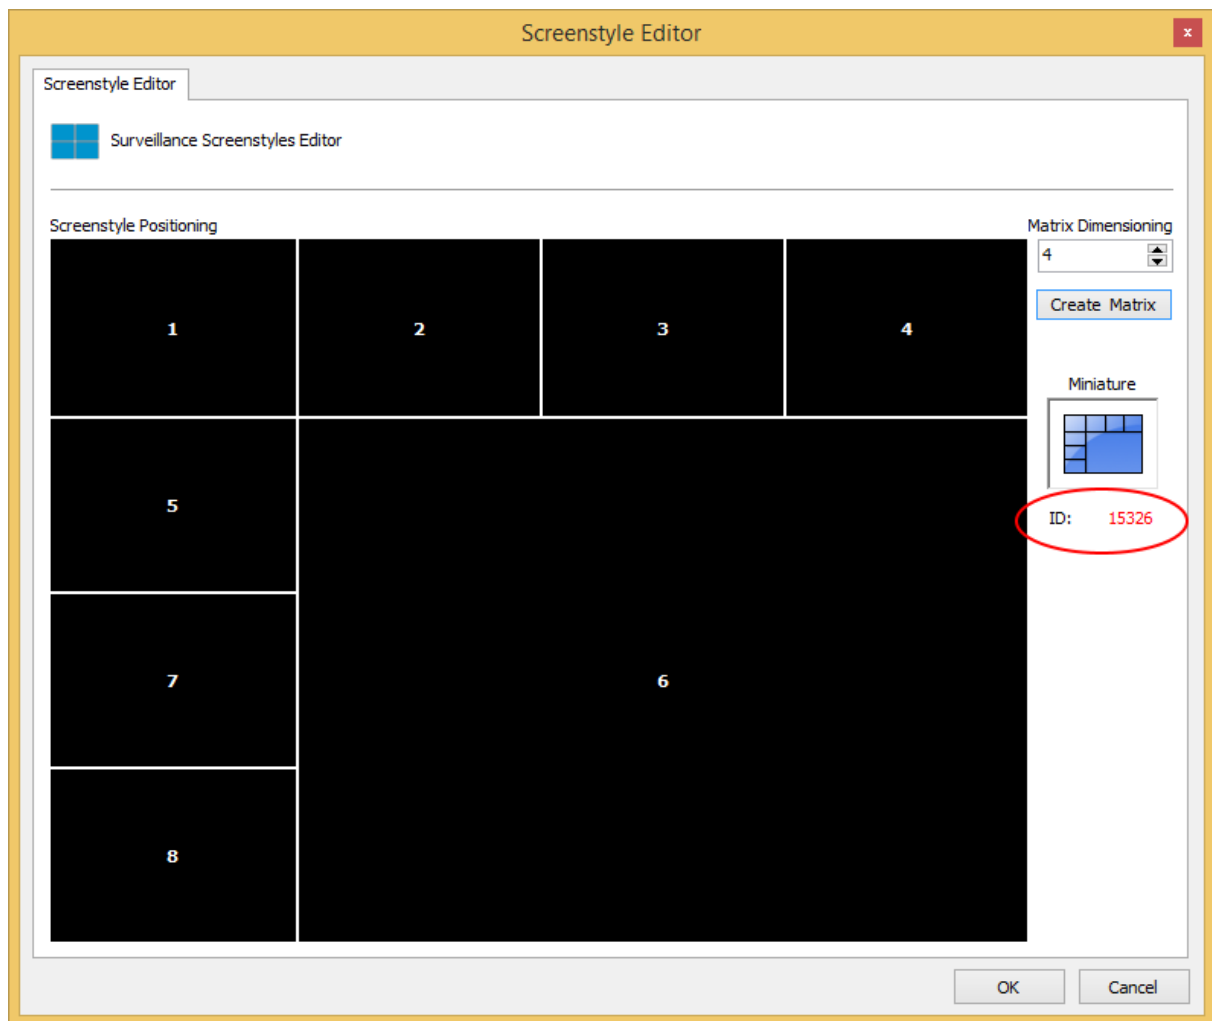

In Explorer edition, only the default styles can be used, following the list below:

-  Automatic screenstyle – ID: 0
-  1 camera - ID: 1399
-  4 cameras - ID: 6278
-  6 cameras - ID: 9983
-  8 cameras - ID: 13538



10 cameras - ID: 18393



13 cameras - ID: 25660

**Example:** Set style for 4 cameras:

```
MatrixScreenStyle = 6278;
```

### 3.3.2.2 MatrixTitle

This property defines the title of the matrix.

Value: String

If the value is nil, the title will be hidden.

**Example:** Set the matrix title as "Office cameras":

```
MatrixTitle = "Office cameras";
```

### 3.3.2.3 MatrixTitleColor

This property defines the color of the matrix title.

Value: Integer

**Example:** Set the matrix color title as blue:

```
MatrixTitleColor = 16711680 (0xFF0000);
```

### 3.3.2.4 MatrixTitleBlinkColor

This property defines the color of the matrix title when it blinks.

Value: Integer

To blink the title, use the method [MatrixBlinkTitle](#).

**Example:** Blink the matrix title with color green:

```
MatrixTitleBlinkColor = 65280 (0x00FF00);
```

### 3.3.2.5 MatrixBackgroundColor

This property defines the background color of the matrix.

Value: Integer

**Example:** Set the matrix background color as black:

```
MatrixBackgroundColor = 0 (0x000000);
```

### 3.3.2.6 CameraBackgroundColor

This property defines the background color of the cameras.

Value: Integer

**Example:** Set the camera background color as red:

```
CameraBackgroundColor = 255(0x0000FF);
```

## 3.4 Video playback

This section defines the methods and properties for video playback control.

### 3.4.1 Methods

This section describes the methods for video playback control.

#### 3.4.1.1 OpenPlaybackMediaSession

This method will open a playback session (This must be called before playing).

| Parameters      | Type     | Description                | Direction |
|-----------------|----------|----------------------------|-----------|
| SecondsAgo      | Integer  | Playback time (In seconds) | Input     |
| InitialDateTime | DATETIME | Initial date and time      | Input     |
| FinalDateTime   | DATETIME | Final date and time        | Input     |

If the parameter SecondsAgo is specified, the parameters InitialDateTime and FinalDateTime are ignored.

If the parameter SecondsAgo is not specified, the parameters InitialDateTime and FinalDateTime are used to open the media session.

**Example 1:** Open a media session of 10 seconds ago:

```
OpenPlaybackMediaSession(10, 0, 0);
```

**Example 2:** Open a playback session using the date interval from 06/21/2013 09:53:00 to 06/21/2013 10:00:00.

```
OpenPlaybackMediaSession(-1, StrToDateTime('06/21/2013 09:53:00'),  
                          StrToDateTime('06/21/2013 10:00:00'));
```

#### 3.4.1.2 Play

This method will start the media playback.

| Parameter | Type                                | Description                             | Direction |
|-----------|-------------------------------------|-----------------------------------------|-----------|
| Direction | <a href="#">TxPlaybackDirection</a> | Playback the video forward or backward. | Input     |

**Example 1:** Playback the video forward:

```
Play(pdxForward);
```

**Example 2:** Playback the video backward:

```
Play(pdxBackward);
```

**3.4.1.3 Pause**

This method will pause the playback.

**Example:**

```
Pause;
```

**3.4.1.4 Resume**

This method will resume the playback if paused.

**Example:**

```
Resume;
```

**3.4.1.5 Stop**

This method will stop the media playback.

**Example:**

```
Stop;
```

**3.4.1.6 Seek**

This method will jump in time of playback by X seconds.

| Parameters | Type                                | Description     | Direction |
|------------|-------------------------------------|-----------------|-----------|
| Seconds    | Integer                             | Seconds to jump | Input     |
| Direction  | <a href="#">TxPlaybackDirection</a> | Jump direction  | Input     |

**Example 1:** Jump 10 seconds forward:

```
Seek(10, pdxForward);
```

**Example 2:** Jump 5 seconds backward:

```
Seek(5, pdxBackward);
```

**3.4.1.7 NextFrame**

This method will show the next frame (Only works when paused).

**Example:**

```
NextFrame;
```

**3.4.1.8 PriorFrame**

This method will show the prior frame (Only works when paused).

**Exemplo:**

```
PriorFrame;
```

**3.4.1.9 ChangeSpeed**

This method will change the playback speed.

| Parameters | Type                            | Description | Direction |
|------------|---------------------------------|-------------|-----------|
| Speed      | <a href="#">TxPlaybackSpeed</a> | Speed       | Input     |

**Example 1:** Playback the video 2x faster:

```
ChangeSpeed (psxF2x) ;
```

**Example 2:** Playback the video 8x slower:

```
ChangeSpeed (psxS8x) ;
```

## 3.4.2 Properties

This section describes the properties for video playback control.

### 3.4.2.1 FrameSyncTime

Use this property to retrieve the date and time of the current frame.

Value: DATETIME

**Example 1:** Show the date and time of the current frame:

```
ShowMessage (DateTimeToStr (FrameSyncTime)) ;
```

## 3.4.3 Events

This section describes the events for video playback control.

### 3.4.3.1 OnFrameSyncTime

Use this event to receive the date and time of the current frame.

| Parâmetros    | Tipo     | Descrição                          | Direção |
|---------------|----------|------------------------------------|---------|
| FrameSyncTime | DATETIME | Date and time of the current frame | Input   |

## 3.5 Options

This section contains methods to control the options of the plugin.

### 3.5.1 SetPopupMenuOption

This method sets the popup menu options.

| Parameters | Type              | Descriptio                        | Direction |
|------------|-------------------|-----------------------------------|-----------|
| Option     | TxPopupMenuOption | Popup menu option                 | Input     |
| Value      | Boolean           | Activate or deactivate the option | Input     |

**Example 1:** Disable the option to save camera snapshots.

```
SetPopupMenuOption (pmoSaveCameraSnapshot, FALSE) ;
```

**Example 2:** Enable the option to save camera snapshots.

```
SetPopupMenuOption (pmoSaveCameraSnapshot, TRUE) ;
```

## 3.6 Localization

This section defines the properties to localize the control.

### 3.6.1 Properties

This section defines the properties to localize the control.

### 3.6.1.1 LanguageID

Use the property to change the language of the control.

Value: String

The language IDs are defined by Windows Language Code Identifier Reference (<http://msdn.microsoft.com/en-us/library/ms533052%28v=vs.85%29.aspx>).

The supported languages are:

| ID    | Descrição            |
|-------|----------------------|
| PT-BR | Brazilian portuguese |
| EN-US | English              |
| ES    | Spanish              |
| FR    | French               |
| TR    | Turkish              |
| KO    | Korean               |
| ZH-CN | Simplified chinese   |
| ZH-TW | Traditional chinese  |
| IT    | Italian              |
| RU    | Russian              |
| PL    | Polish               |
| NL-NL | Dutch                |
| CS    | Czech                |
| LT    | Lithuanian           |
| JA    | Japanese             |
| HU    | Hungarian            |
| TH    | Thai                 |

**Exemplo1:** Change the language to english:

```
LanguageID = 'EN-US';
```

**Exemplo2:** Change the language to spanish:

```
LanguageID = 'ES';
```

**Part**

**IV**

## 4 Usage example

This example shows a general way of connecting to a server and playback 4 cameras

```
// Add a server
AddServer('Digifort', '127.0.0.1', 8600, 'admin', '1234', cmxInternal);

// Connect to the server
Connect(TRUE, TRUE);

// Define the screenstyle to be used (Quad)
MatrixScreenStyle = 6278;

// Add the cameras
AddCamera('Camera1', 'Digifort', 0);
AddCamera('Camera2', 'Digifort', 1);
AddCamera('Camera3', 'Digifort', 2);
AddCamera('Camera4', 'Digifort', 3);

// Open the media session to playback the last 5 minutes (300 = 5 * 60)
OpenPlaybackMediaSession(300, 0, 0);

// Start playback
Play(pdxForward);
```