作品集

18098302488
2971762643@qq.com
李东盛

PORTFOLIO

https://aaronswartz0217.github.io/Else-Web/introduction.html

CONTENT

01 3D设计与场景
02 技术美术与特效
03 虚幻五蓝图
04 横向领域拓展


3D设计与场景

18098302488
2971762643@qq.com
李东盛

PORTFOLIO

物魄奇觀

场景建模/渲染

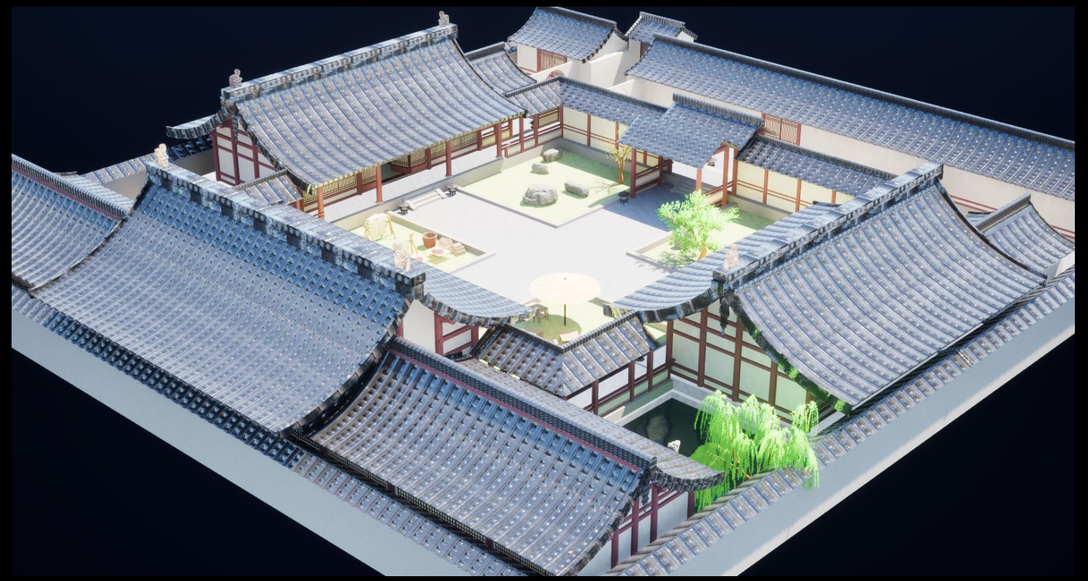




物語


奇譚






物
魅
奇
景
顺雨调风
顺雨调风

植物资产展示





部分场景渲染


maxVray渲染




UE渲染（通过自研工作流迁移）






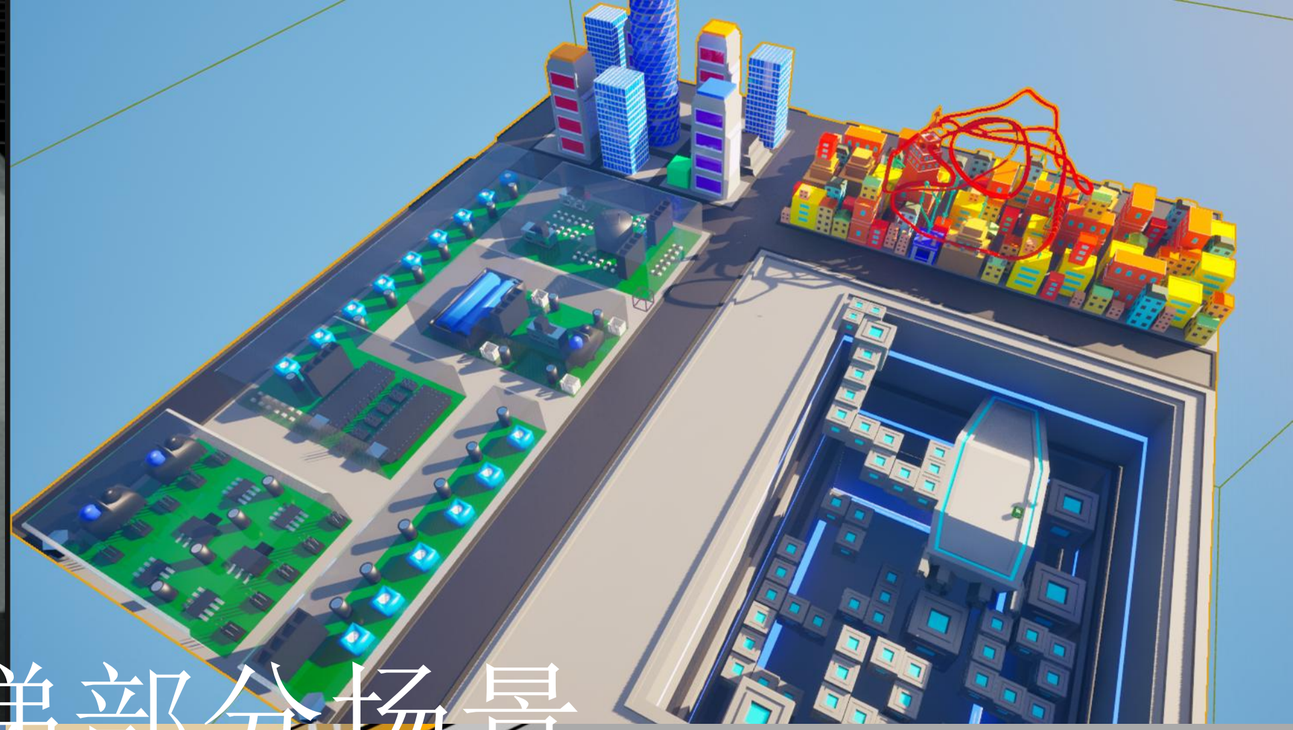


机器人速递部分场景

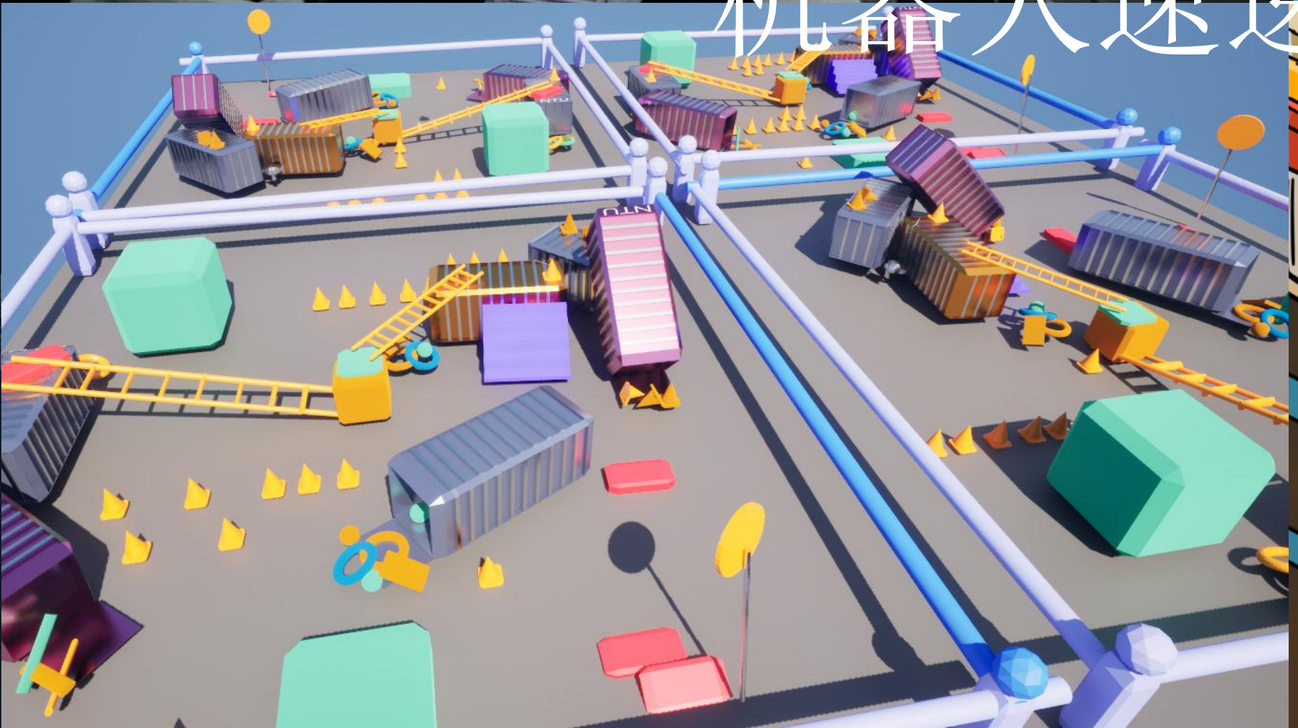


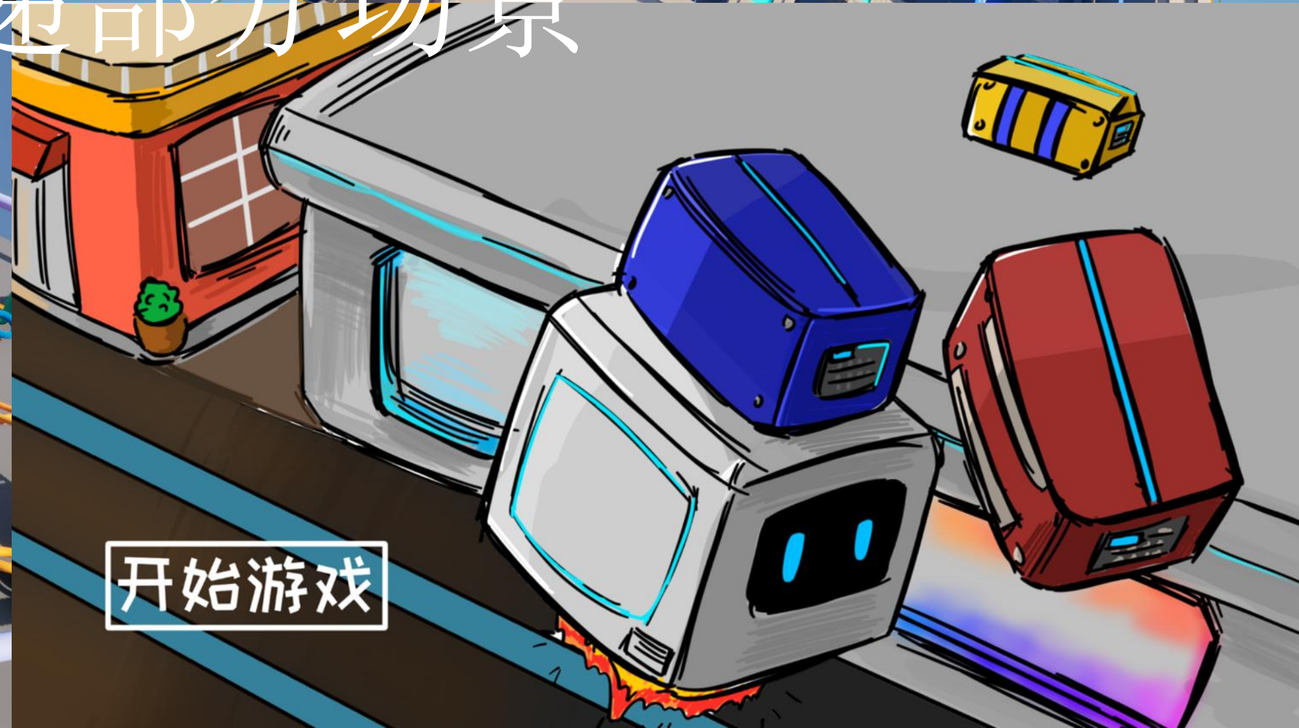

《芬奇房间》场景地编以及建模

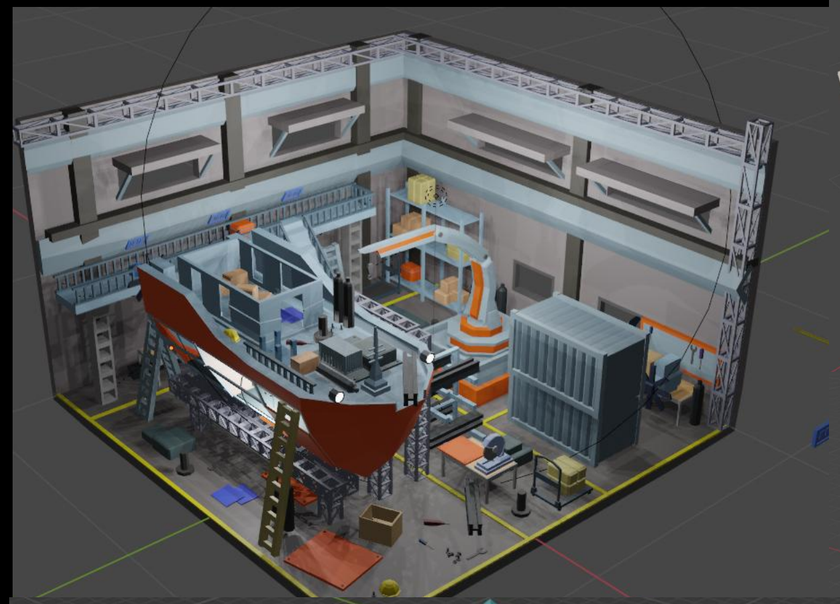



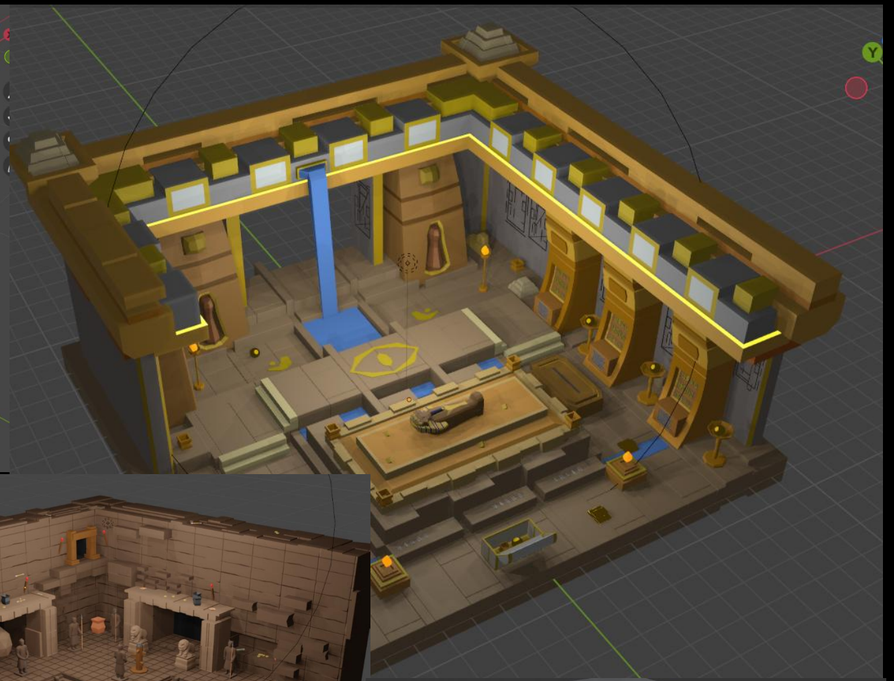











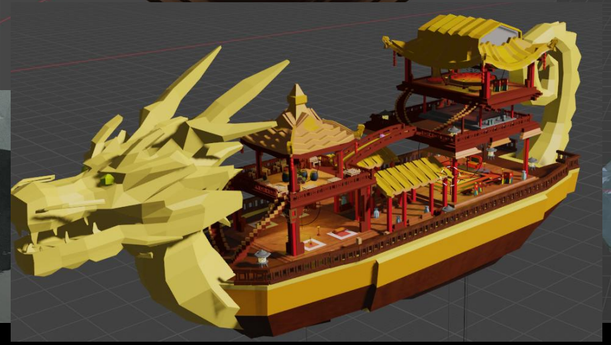


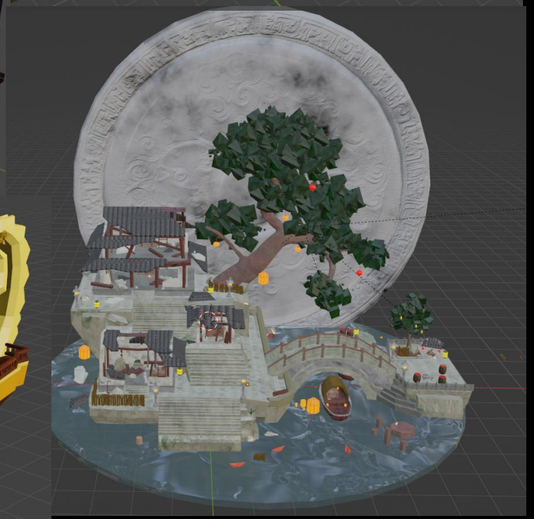







《芬奇房间》场景地编以及建模

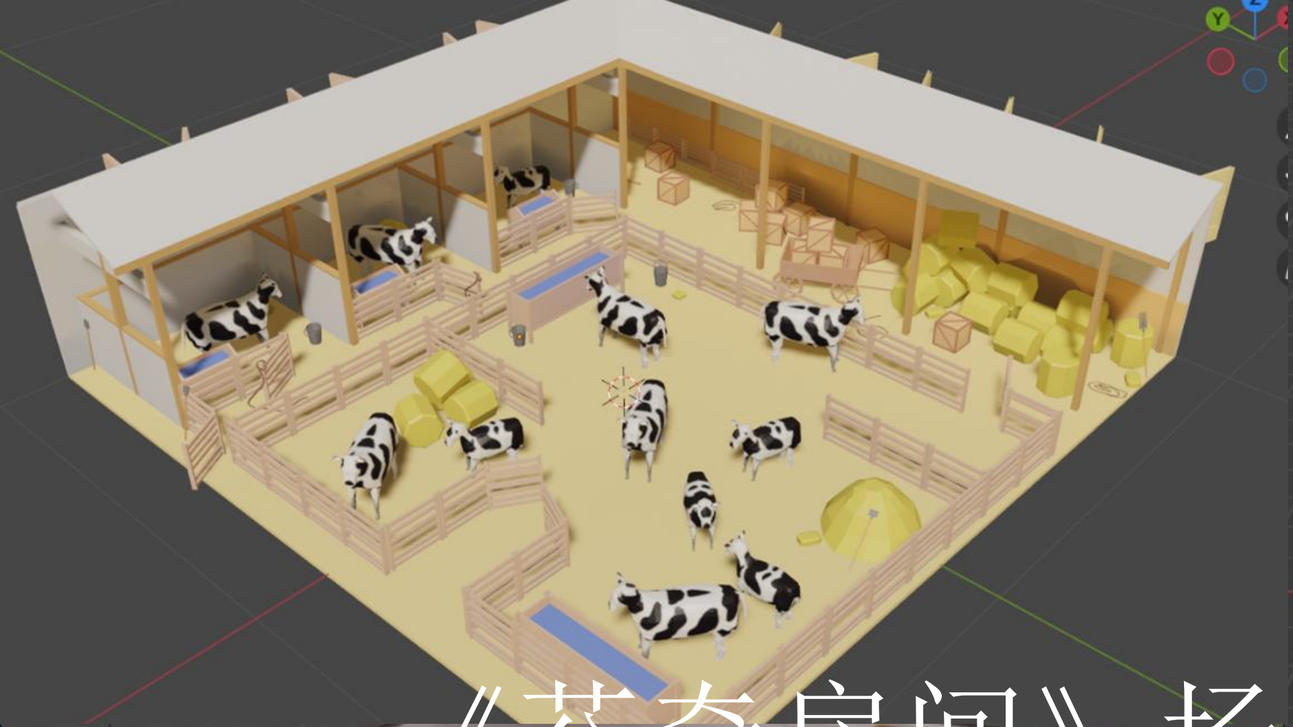



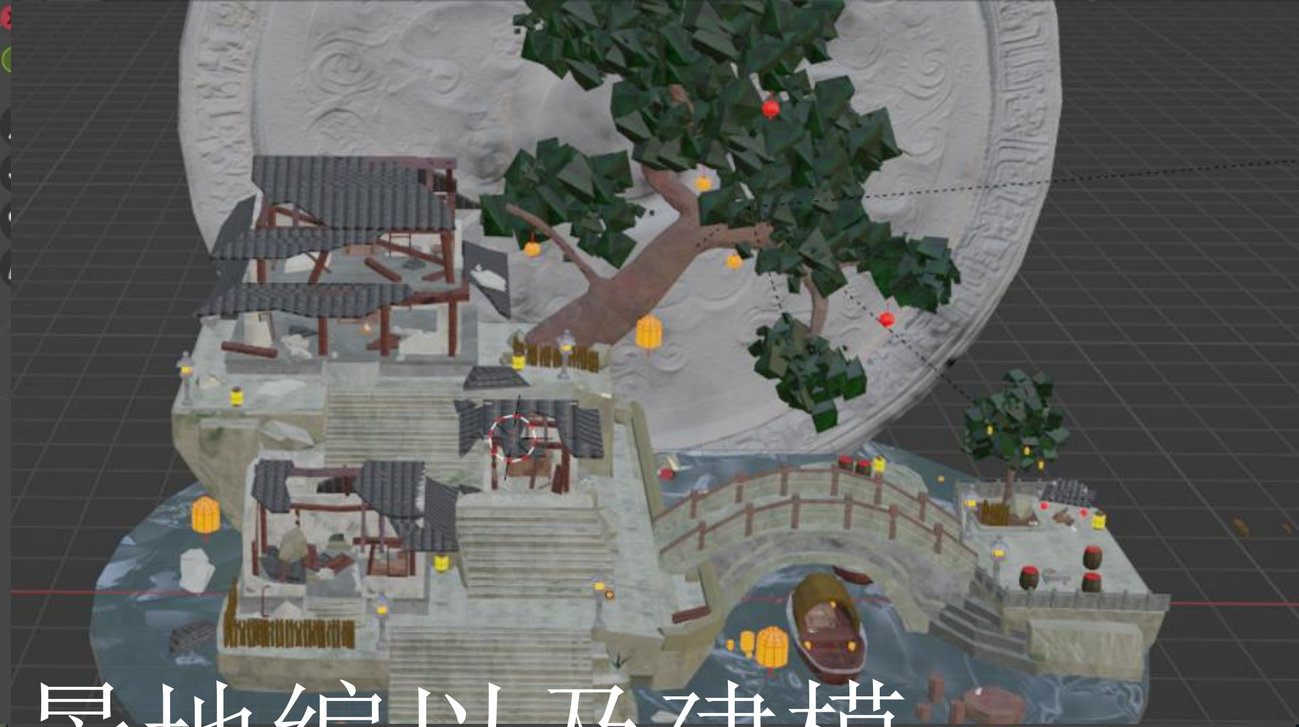





《芬奇房间》场景地编以及建模





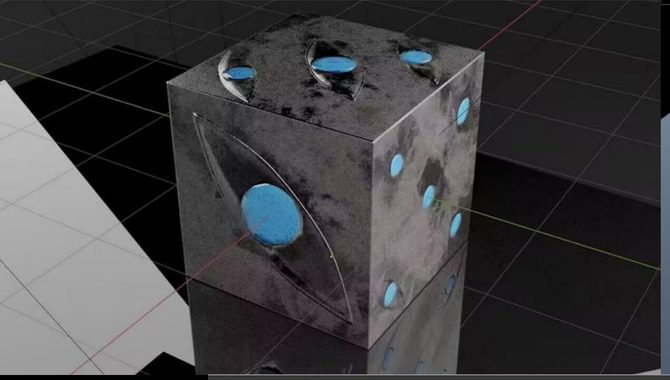

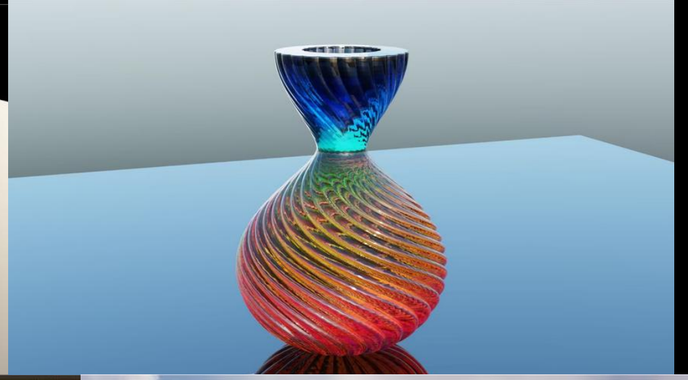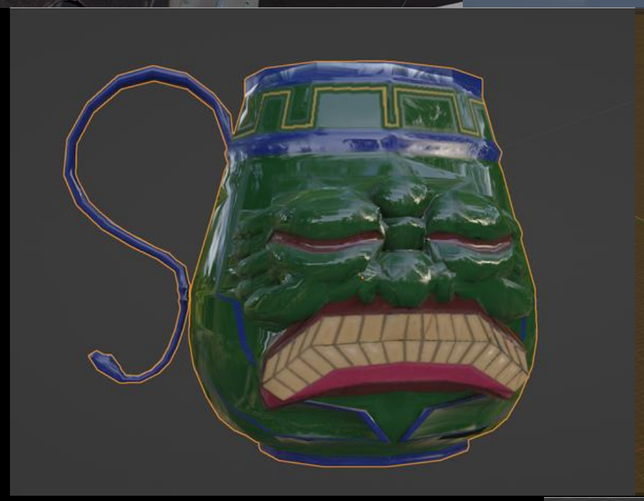


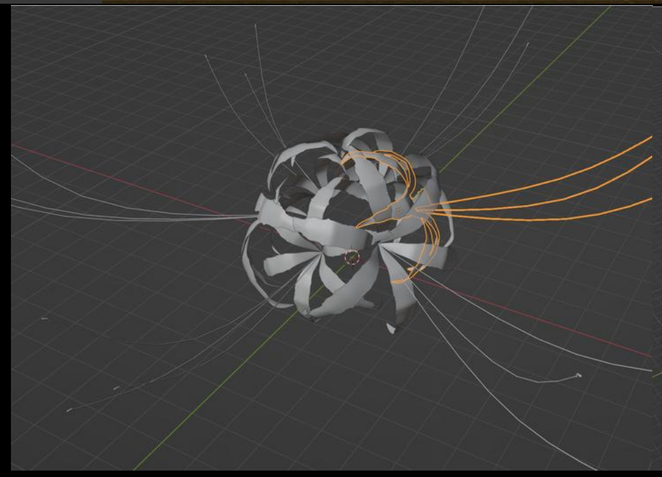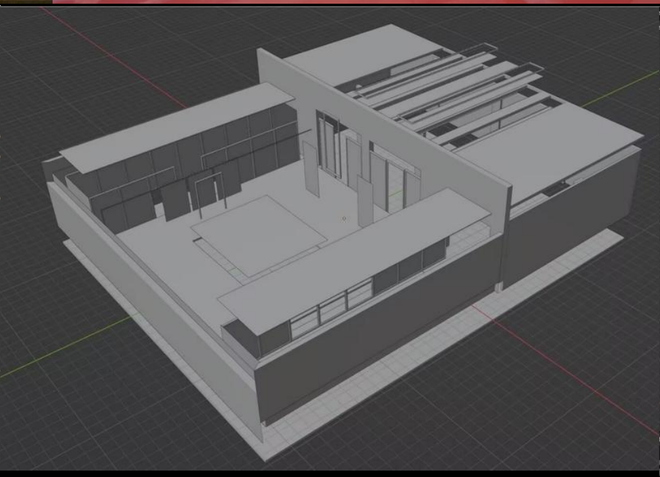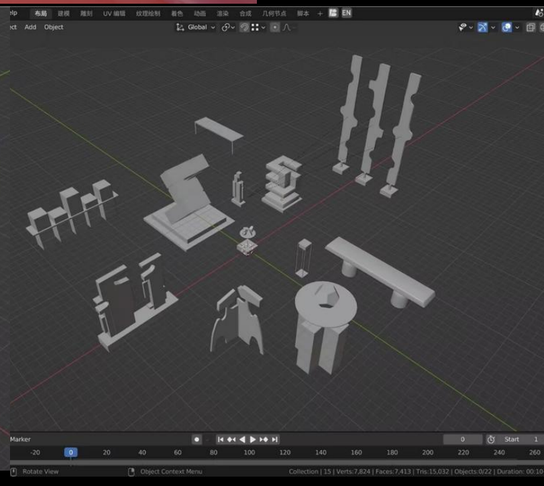


部分产品以及道具建模



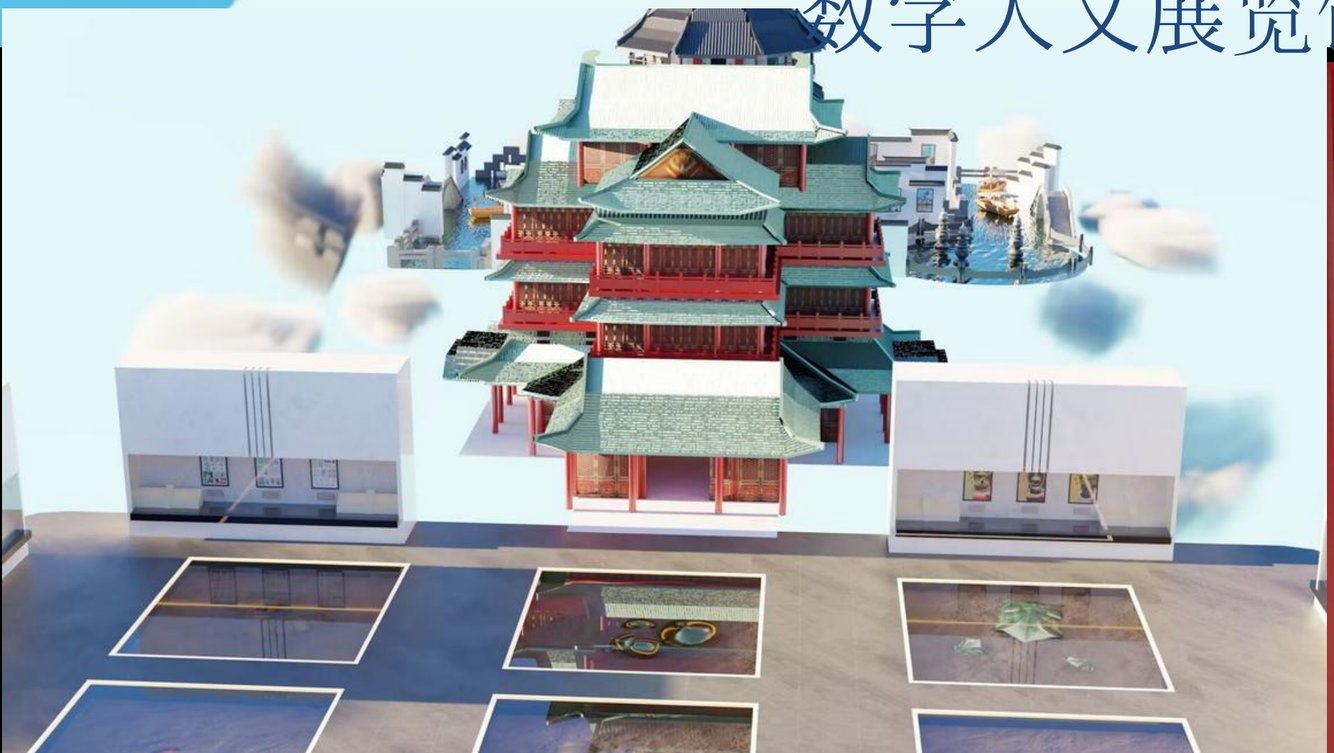

数字人文展览馆项目渲染图






角色建模，包含骨骼以及形态键







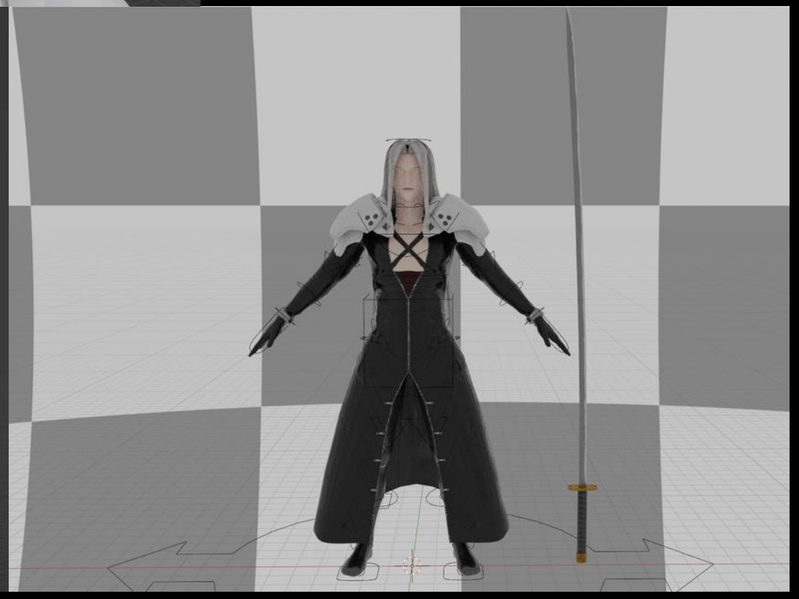

25年全球48小时极限游戏开发大赛基于游戏引擎内场景（七关）





Bubble
head












技术美术与特效


18098302488
2971762643@qq.com
李东盛

PORTFOLIO


特殊效果实现




基于shader graph实现unity镭射效果



基于urp lit实现的泡泡材质效果




基于shader graph实现背景效果

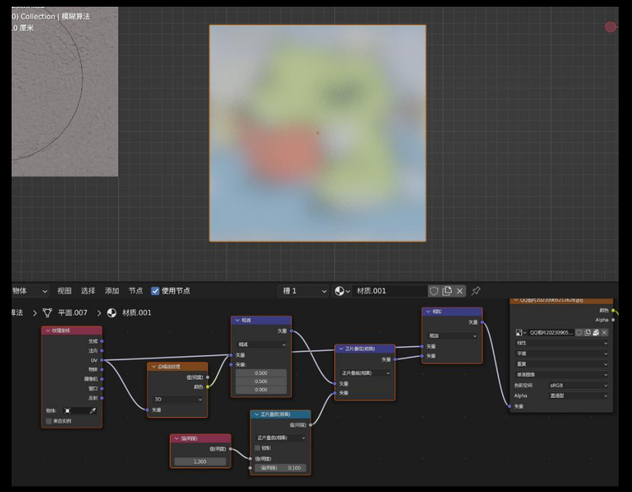


节点模糊效果



基于虚幻五后处理体积的描边

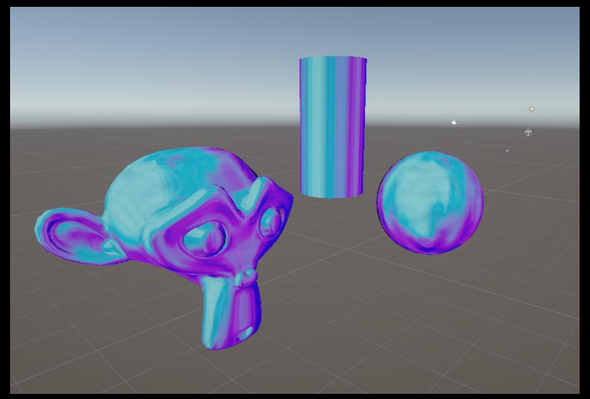


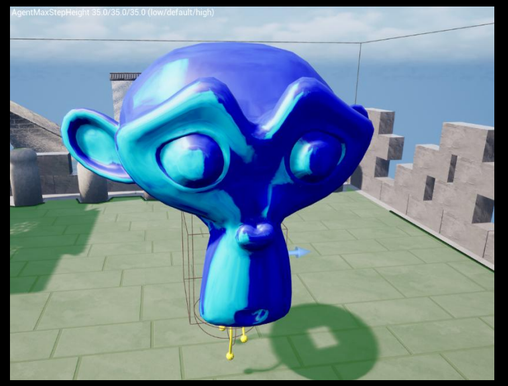


基于unity，虚幻五复刻mtlcapture效果

bledner几何节点特殊效果


使用贝塞尔曲线定制节日祝福粒子效果动画

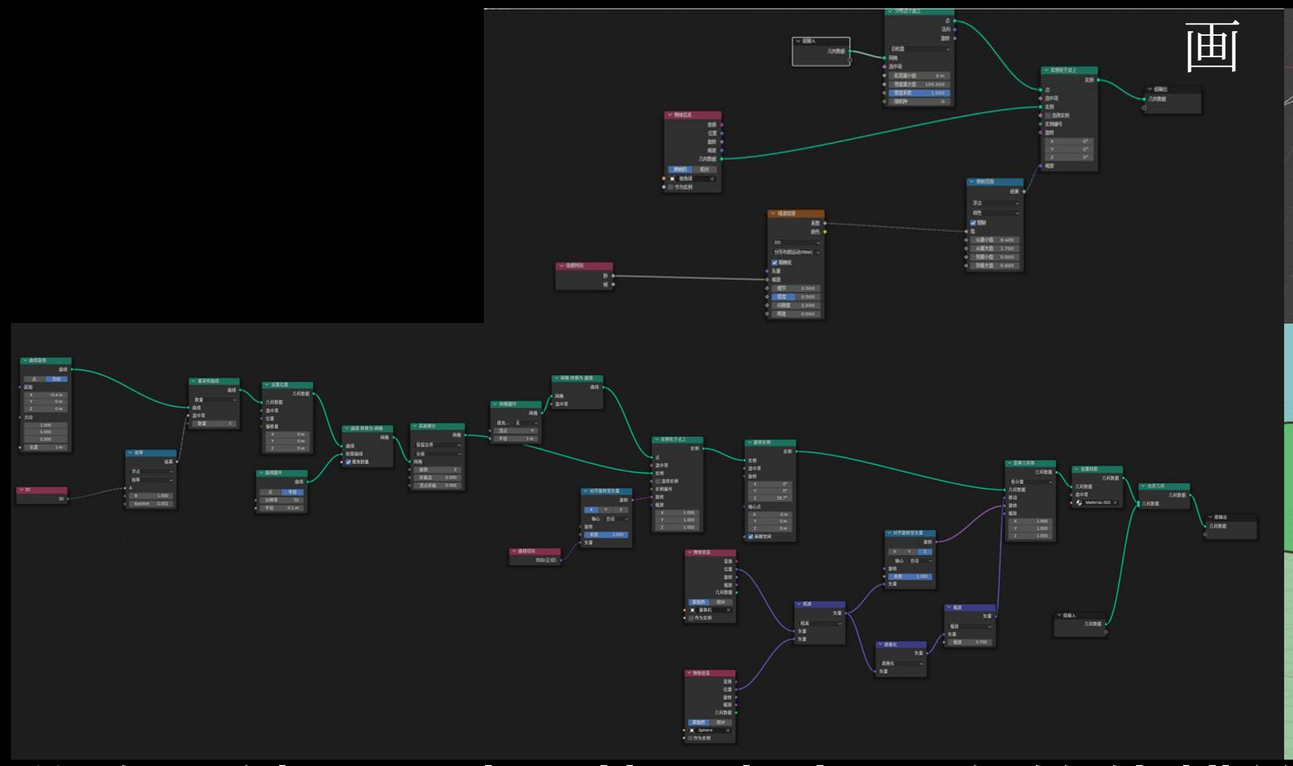

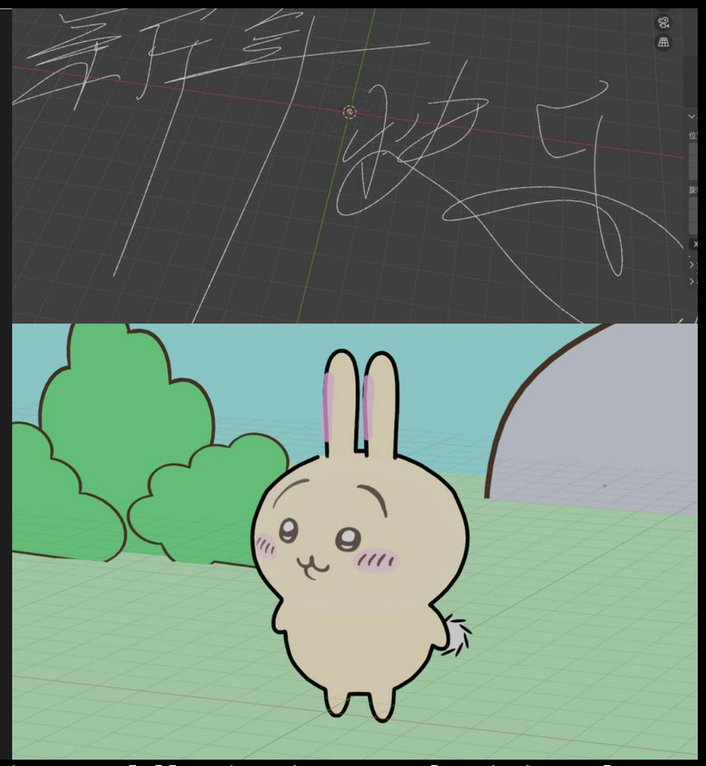


乌萨奇三渲二，以及基于相机视角的仿蜡笔画描边和尾部追踪

可交互化水体

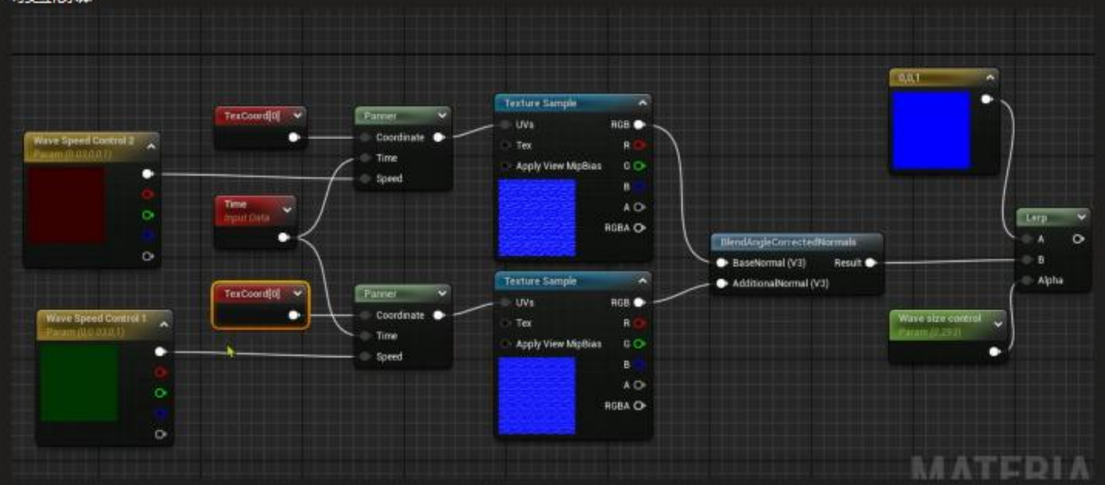


流光特效（材质覆盖）

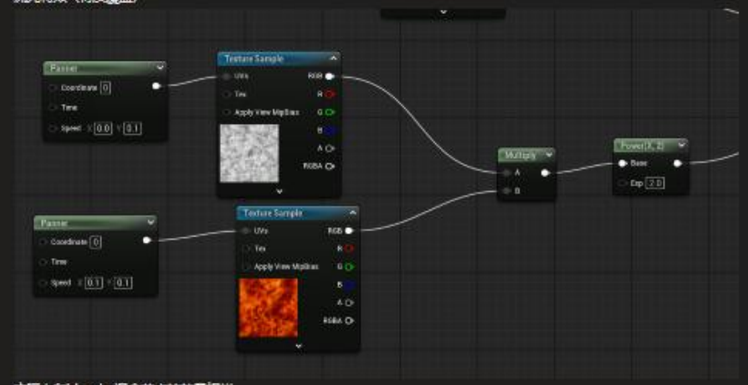

实际上和blender混合节点的效果相似

matcap特殊风格化材质

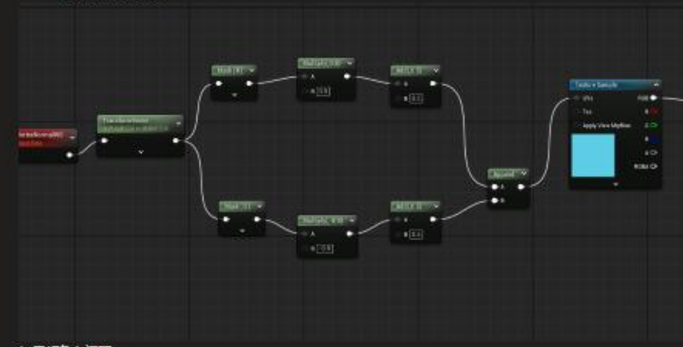


如果颜色有问题

记得修改颜色的压缩格式




在节点中控制uv的变化

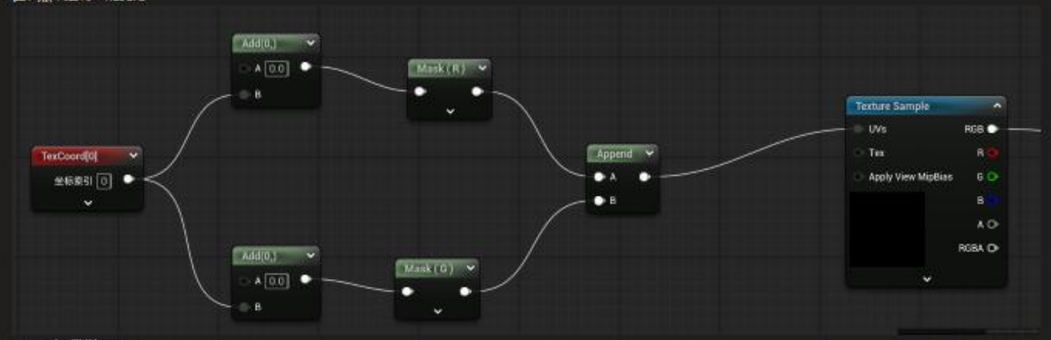

边缘消失特效

saturate为归一化节点

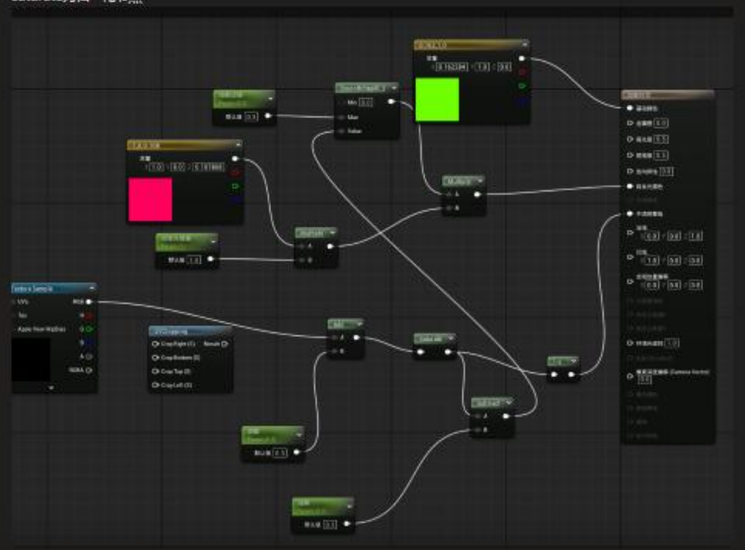

mask对应数学里面的



杂项材质蓝图效果展示


以下为本人笔记内容

虚幻五蓝图方向


18098302488
2971762643@qq.com
李东盛

PORTFOLIO

部分蓝图实现效果——虚幻五互动直播间

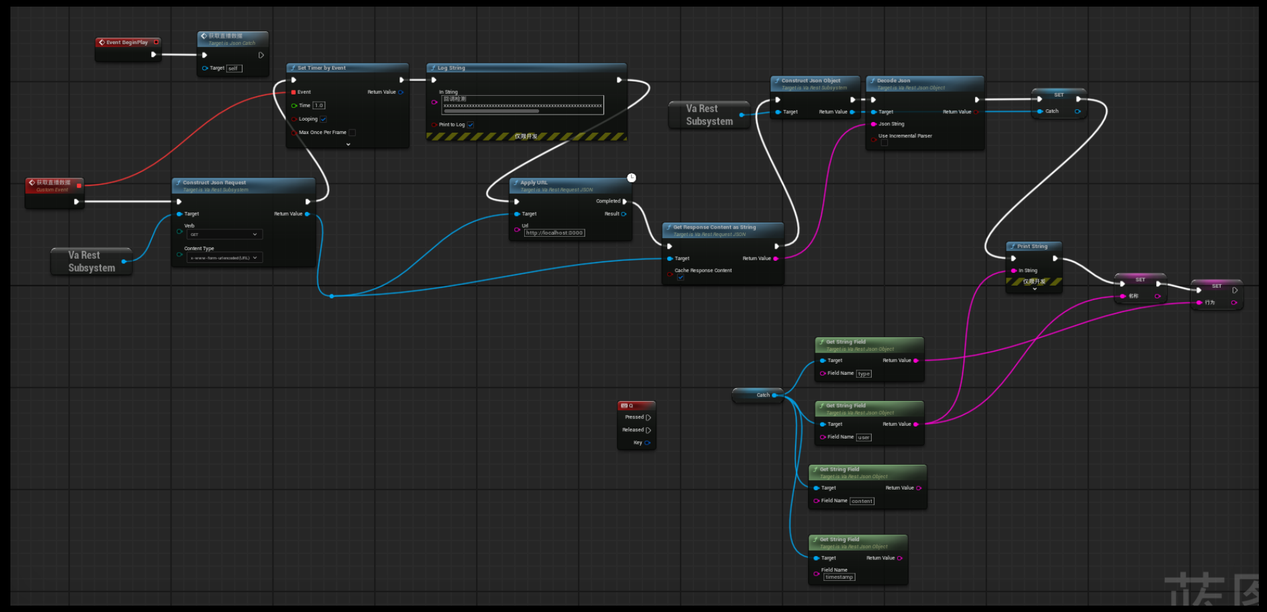

json catch蓝图，获取本地服务器爬虫抓取的直播间数据

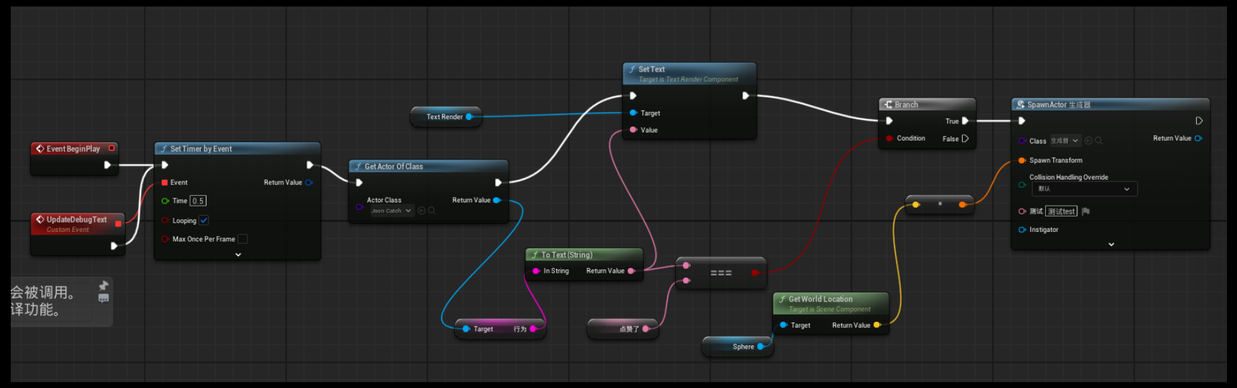


生成器，根据抓取传回的数据生成，例如点赞生成打印用户的方块

```
)JSON
LogVaRest: Warning: UVaRestRequestJSON::GetResponseContentAsString(637): Response content string is cached
LogBlueprintUserMessages: [json_catch_C_UAID_C87F54CB554B32DC02_1542118616] 用户_G
LogBlueprintUserMessages: 回调检测xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
LogVaRest: UVaRestRequestJSON::ProcessRequest(375): Request (urlencoded): GET http://localhost:8000 (check bExtendedLog for additional data)
LogVaRest: Response (200):
JSON(
{"type": "like", "user": "用户_C", "content": "点赞了", "timestamp": "2026-06-30T16:54:02.552820"}
)JSON
LogVaRest: Warning: UVaRestRequestJSON::GetResponseContentAsString(637): Response content string is cached
LogBlueprintUserMessages: [json_catch_C_UAID_C87F54CB554B32DC02_1542118616] 用户_C
LogBlueprintUserMessages: 回调检测xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
LogVaRest: UVaRestRequestJSON::ProcessRequest(375): Request (urlencoded): GET http://localhost:8000 (check bExtendedLog for additional data)
LogVaRest: Response (200):
JSON(
{"type": "like", "user": "用户_D", "content": "点赞了", "timestamp": "2026-06-30T16:54:03.577387"}
)JSON
LogVaRest: Warning: UVaRestRequestJSON::GetResponseContentAsString(637): Response content string is cached
LogBlueprintUserMessages: [json_catch_C_UAID_C87F54CB554B32DC02_1542118616] 用户_D
LogBlueprintUserMessages: 回调检测xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
LogVaRest: UVaRestRequestJSON::ProcessRequest(375): Request (urlencoded): GET http://localhost:8000 (check bExtendedLog for additional data)
LogVaRest: Response (200):
JSON(
{"type": "like", "user": "用户_G", "content": "点赞了", "timestamp": "2026-06-30T16:54:04.599000"}
)JSON
LogVaRest: Warning: UVaRestRequestJSON::GetResponseContentAsString(637): Response content string is cached
LogBlueprintUserMessages: [json_catch_C_UAID_C87F54CB554B32DC02_1542118616] 用户_G
LogBlueprintUserMessages: 回调检测xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
LogVaRest: UVaRestRequestJSON::ProcessRequest(375): Request (urlencoded): GET http://localhost:8000 (check bExtendedLog for additional data)
LogVaRest: Response (200):
JSON(
{"type": "like", "user": "用户_E", "content": "点赞了", "timestamp": "2026-06-30T16:54:05.623639"}
)JSON
LogVaRest: Warning: UVaRestRequestJSON::GetResponseContentAsString(637): Response content string is cached
LogBlueprintUserMessages: [json_catch_C_UAID_C87F54CB554B32DC02_1542118616] 用户_E
LogBlueprintUserMessages: 回调检测xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx
LogVaRest: UVaRestRequestJSON::ProcessRequest(375): Request (urlencoded): GET http://localhost:8000 (check bExtendedLog for additional data)
LogVaRest: Response (200):
JSON(
{"type": "like", "user": "用户_G", "content": "点赞了", "timestamp": "2026-06-30T16:54:07.158890"}
)JSON
LogVaRest: Warning: UVaRestRequestJSON::GetResponseContentAsString(637): Response content string is cached
LogBlueprintUserMessages
LogBlueprintUserMessages
LogVaRest: UVaRestReques
LogVaRest: Response (200
JSON(
{"type": "member", "user
)JSON
LogVaRest: Warning: UVaR
LogBlueprintUserMessages
```





效果演示

部分蓝图实现效果——战斗系统1

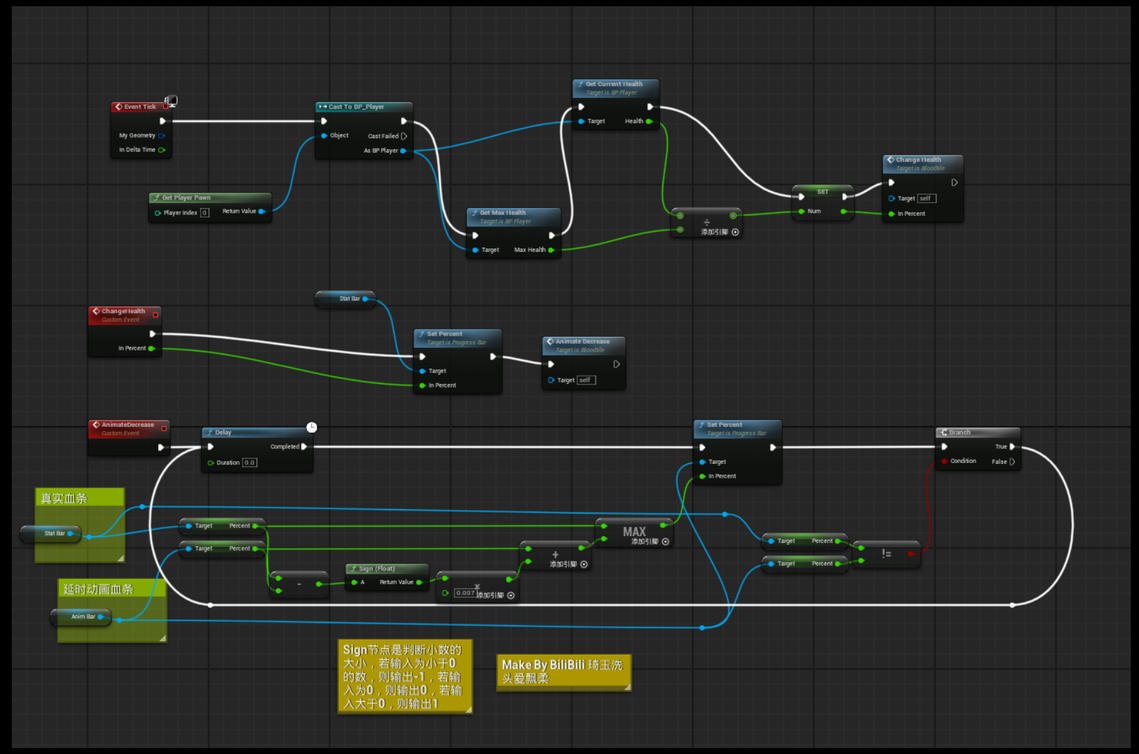

基于UMG实现的动态血条

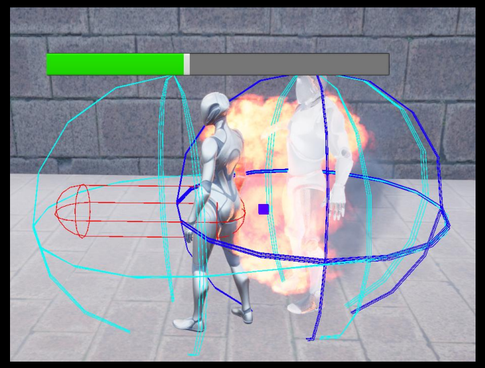


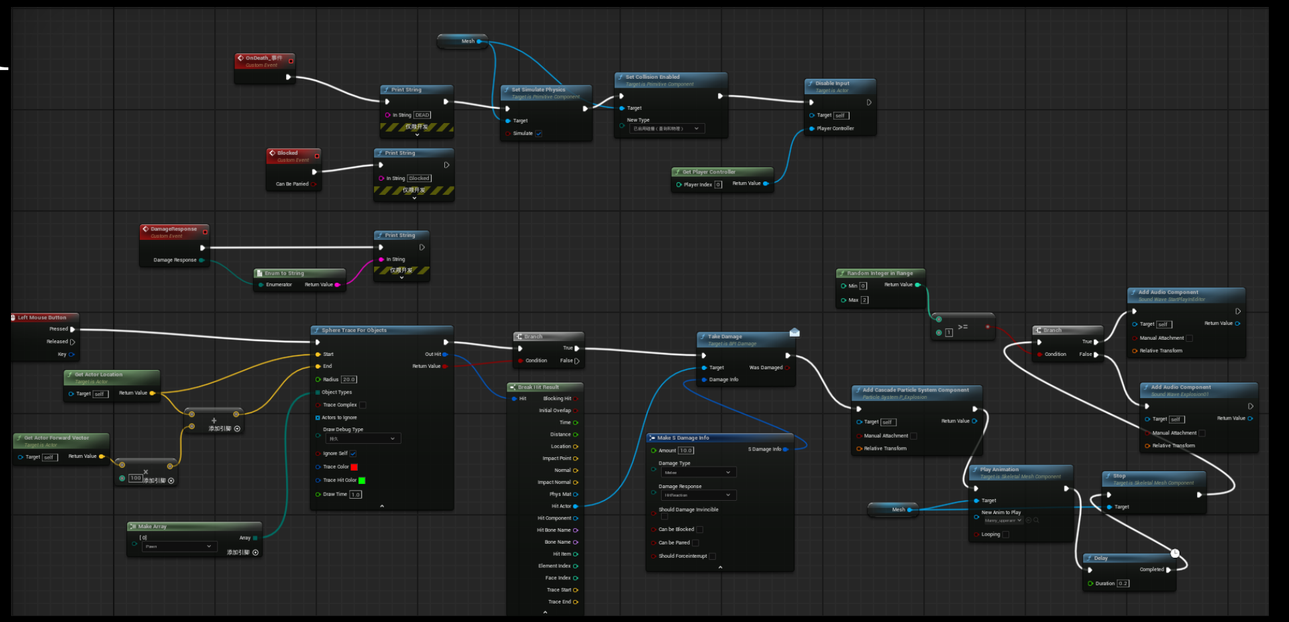

player战斗系统，鼠标左键攻击


死后布娃娃系统



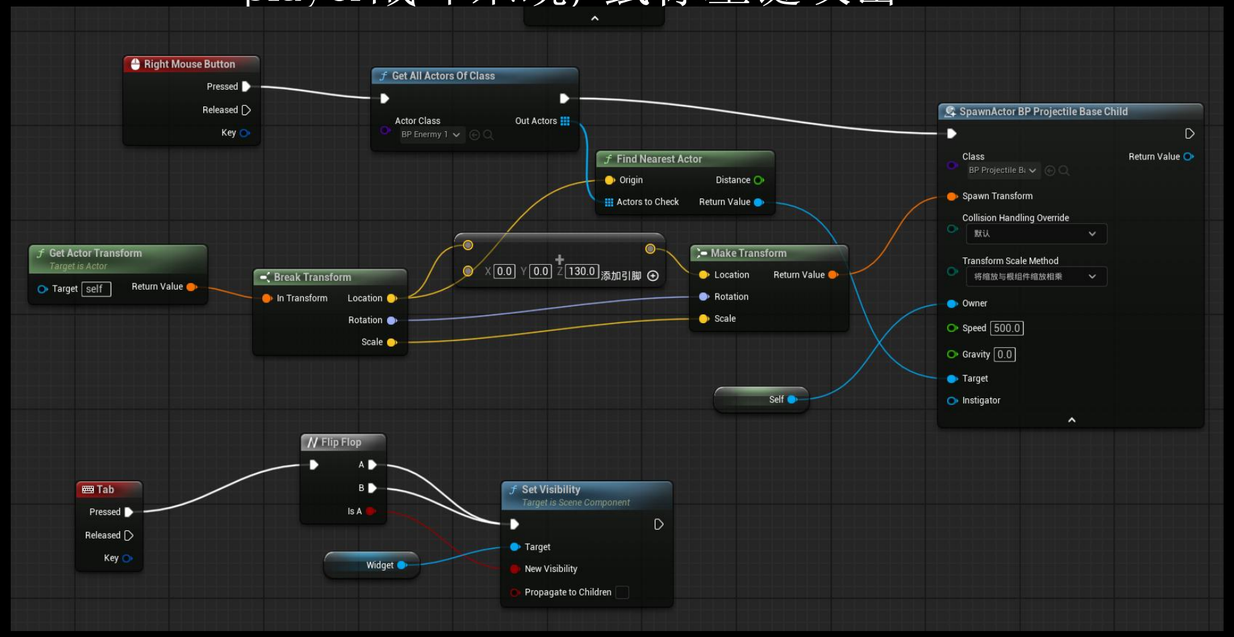


右键追踪弹以及tab隐藏血条


部分蓝图实现效果——战斗系统2

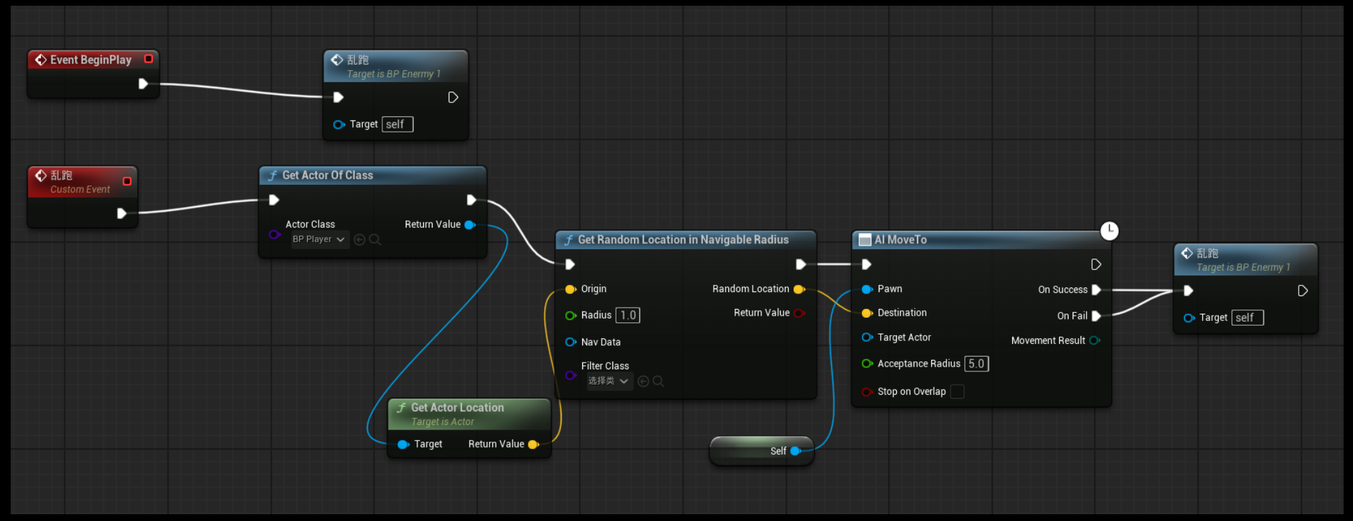


enemy角色范围内追踪player

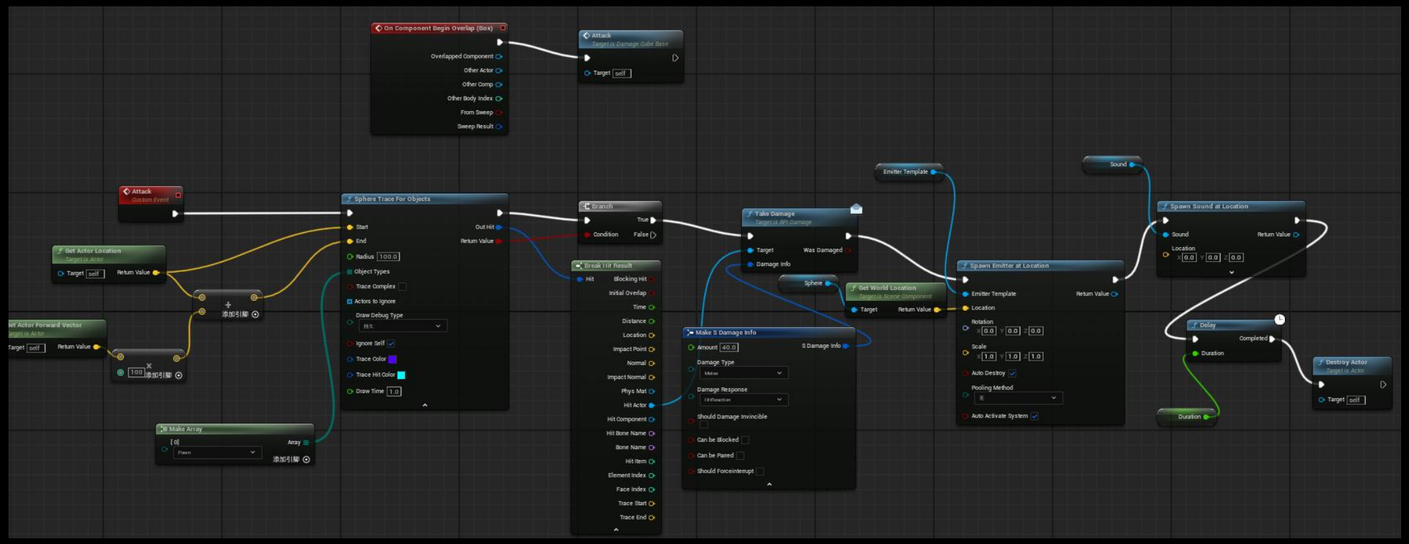


范围内接触爆炸陷阱

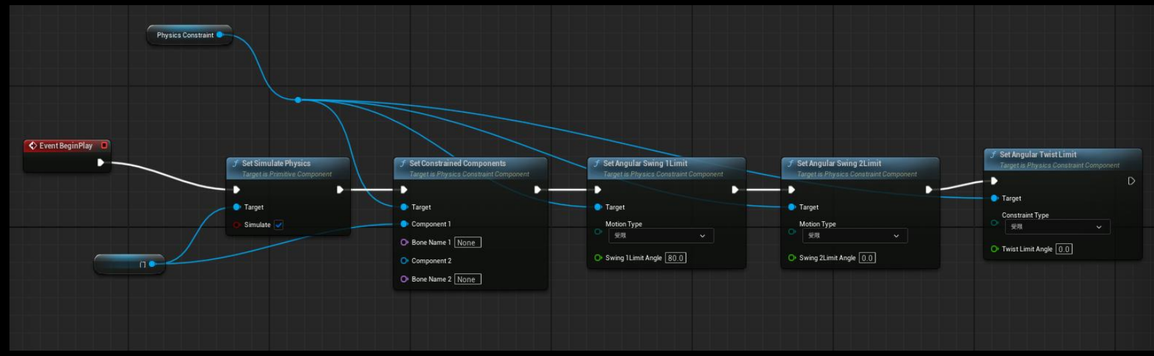


场景中物理门

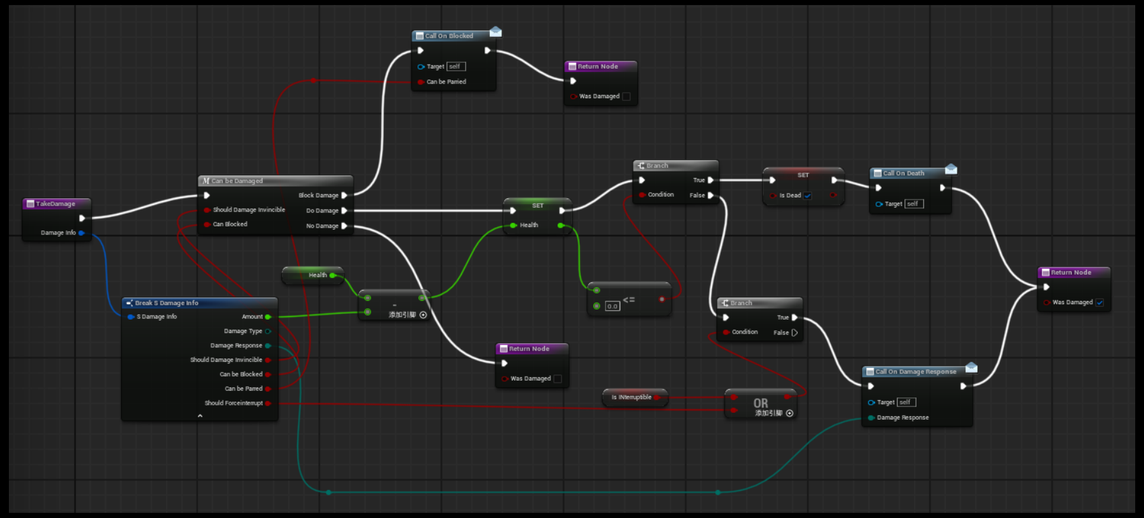

伤害系统蓝图

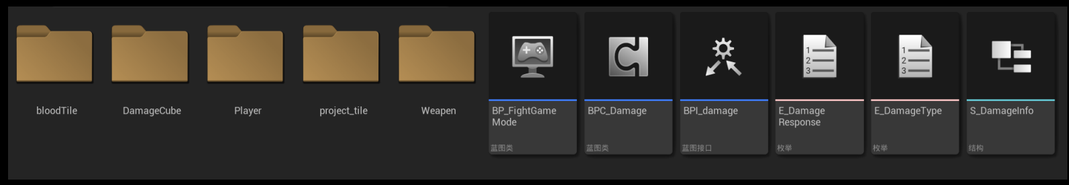

部分蓝图实现效果——骨骼动画以及玩法

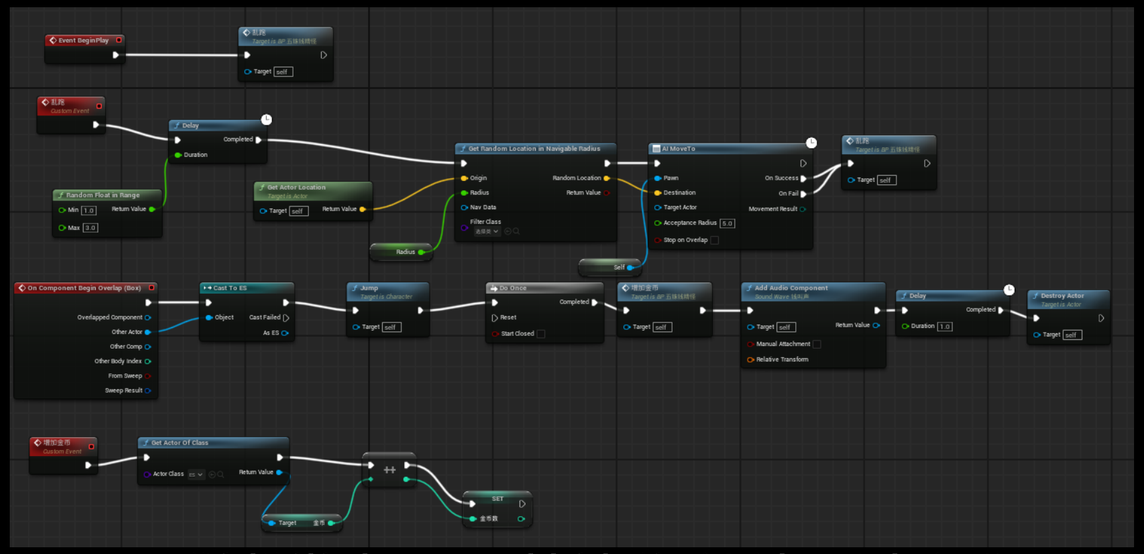


随机游走NPC，被触碰时增加玩家积分

项目中有关骨骼动画实现案例较少，只制作过随机游走的简单NPC






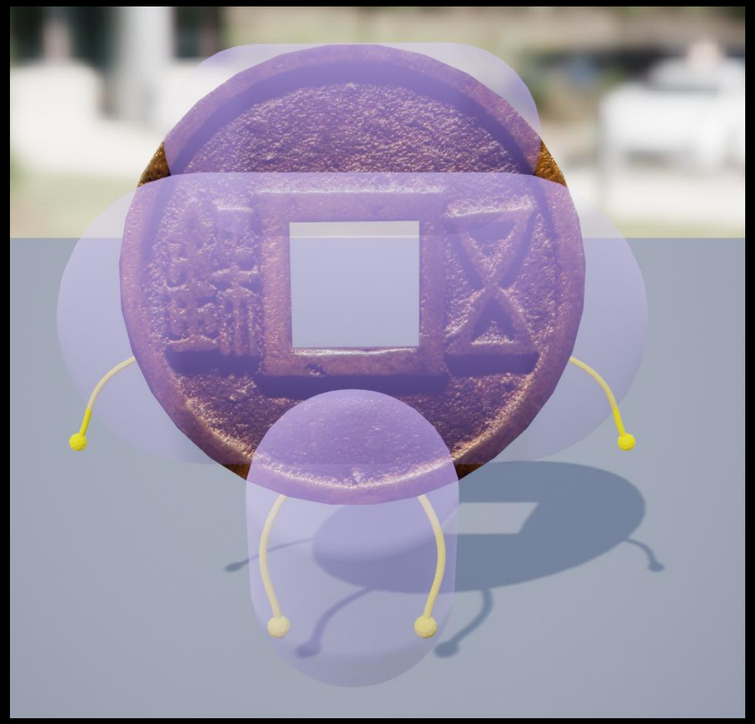

Physics asset配置

利用混合空间（Blend Space）实现参数化动画驱动：通过监听角色移动速度，动态控制待机与行走动画的平滑过渡。当速度归零时自动切换至待机状态；速度大于零时，则根据当前速率在待机和行走动画间进行线性插值混合，确保角色移动表现自然流畅。

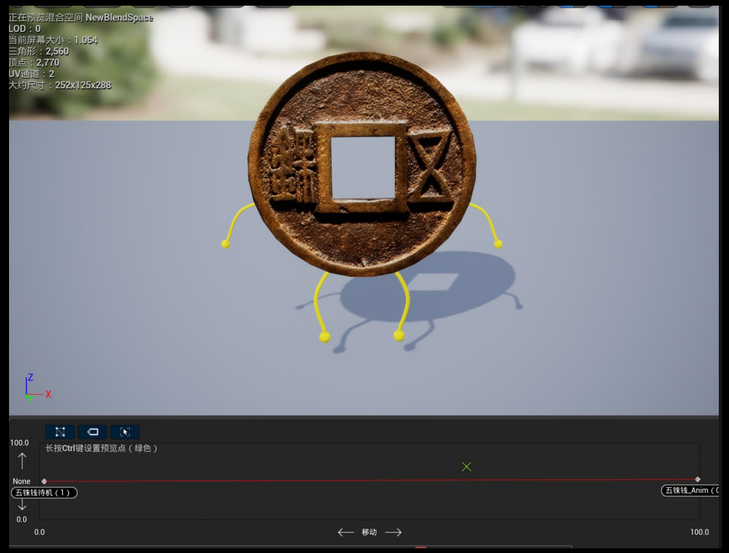


杂项蓝图效果展示

以下为本人笔记内容


7，非正统套壳物体

在特定区域（碰撞体）触发后套上某物体

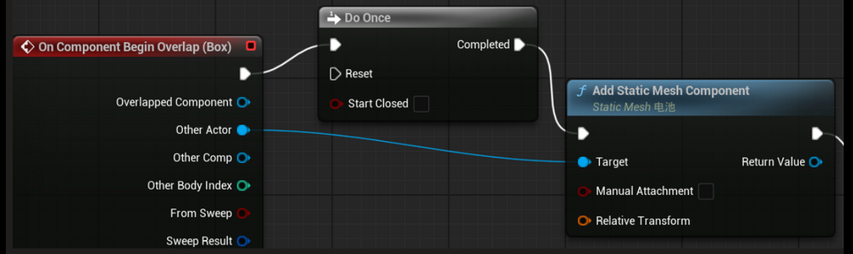

只要做一次即可，多次会有问题


4，可以按下e键盘交互的灯光

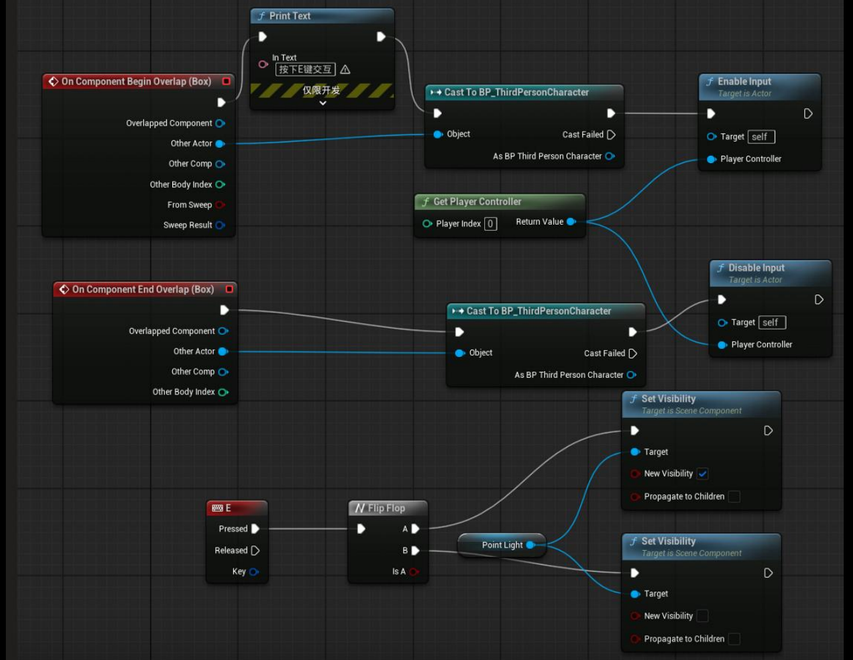

创建碰撞体，以及mesh和灯光，灯光是mesh的子集，灯光默认隐藏，记得勾选一下可见

但是相对来说比较占用

5，第三人称第一人称转化

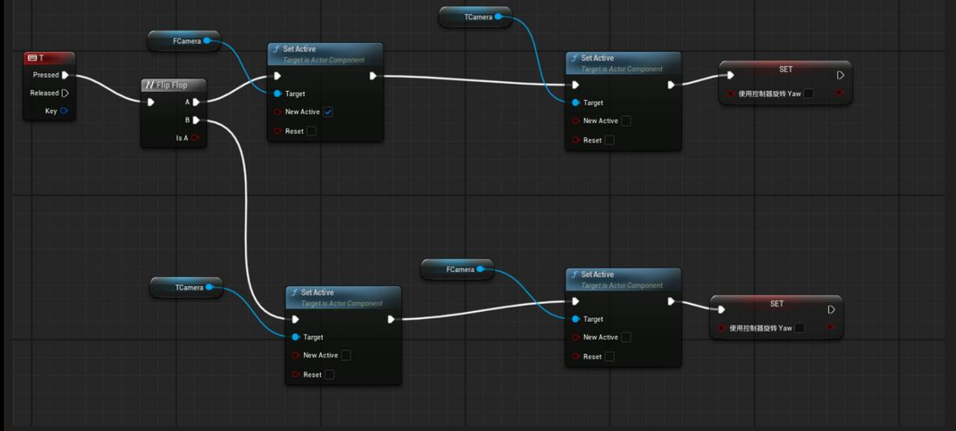

set controller yawl

在人物头上添加一个摄像机

然后按照上述配置


2，made in heaven（天堂制造）

蓝图中加入基本天空组件，创建太阳月亮（可以调整源角度让它变大一点）两个点光源，注意亮度，然后在tick中如图设置

（捆绑月亮太阳父子级之后调整相对之间的角度）




注意调整前向渲染优先级

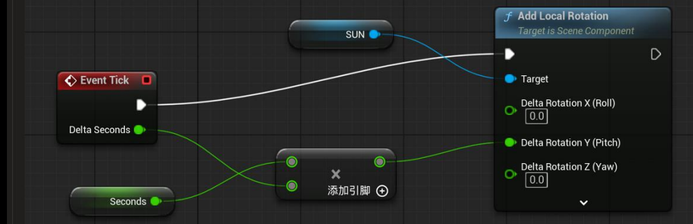

然后加一个全局音量调整曝光度expossure大概为10


另外一种实现方式



6，触发固定的过场动画

首先你需要创建关卡序列

然后进入关卡蓝图进行以下设置

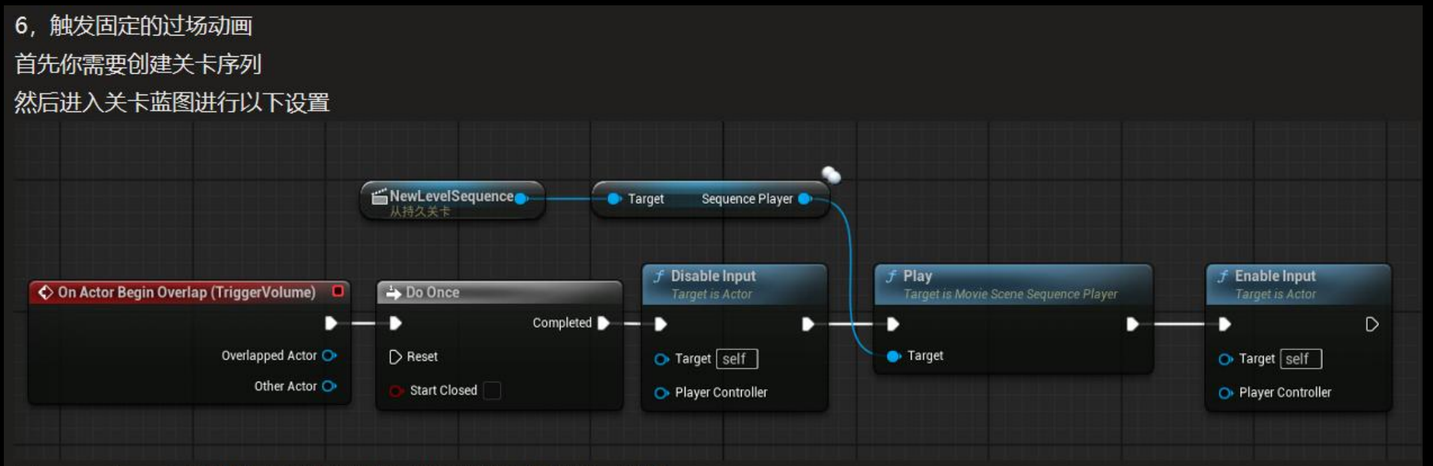

triggervolume可以替换成其他的节点，以实现关卡过场动画功能


点击场景物体然后在关卡蓝图当中右键才能设置

横向领域拓展


18098302488
2971762643@qq.com
李东盛

PORTFOLIO

以及多个横向领域

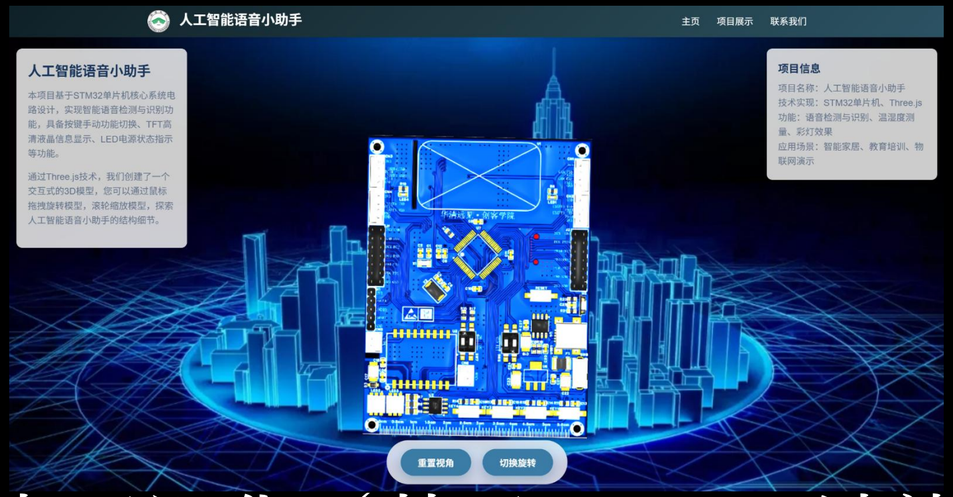


数字可视化（基于Threejs渲染）

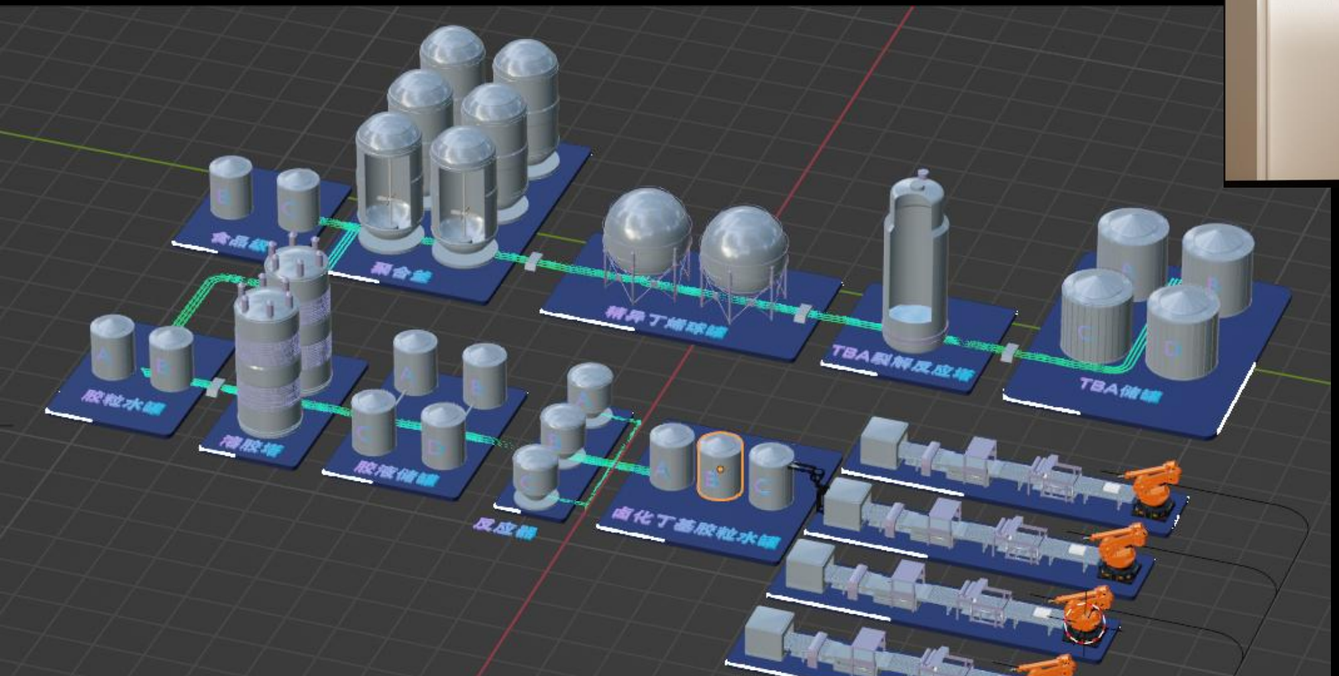


电商渲染图（基于Vray）



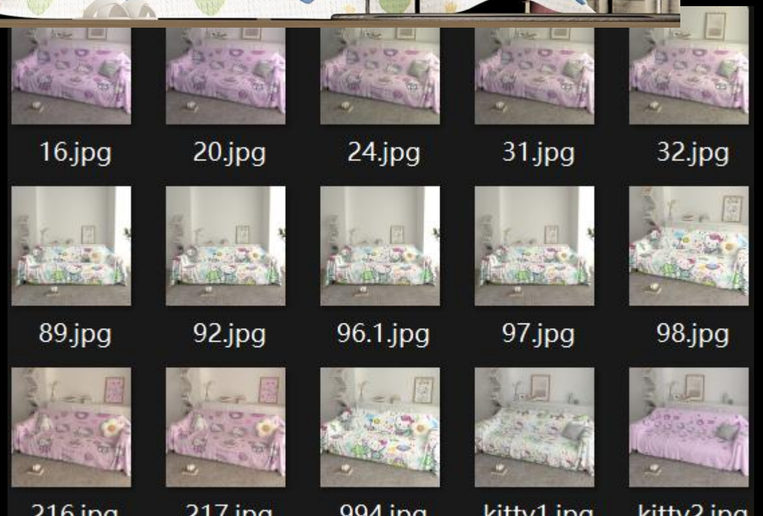

基于python的调用Blender快速修复模型插件

AaronSwartz0217/BLENDER-PYTHON

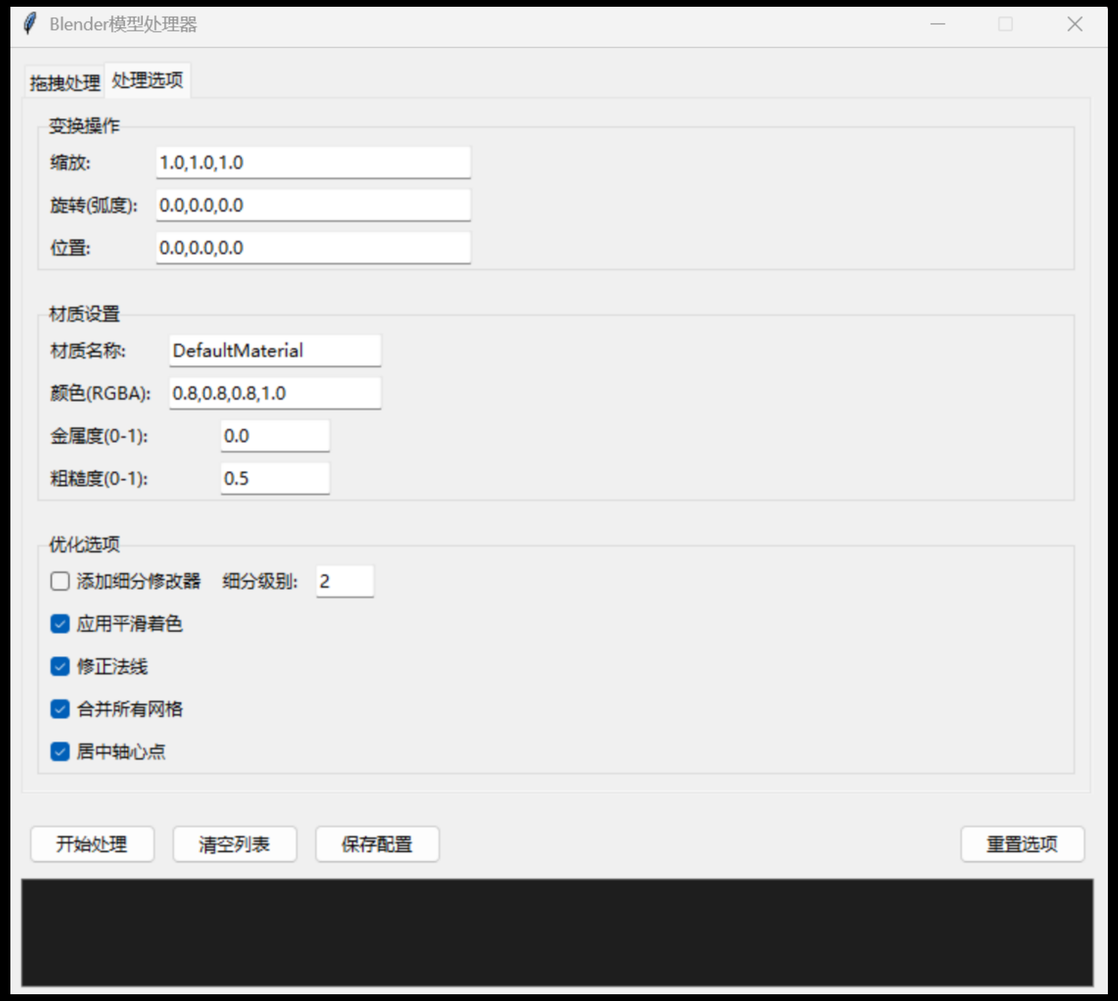



本项目提供一个基于 Blender 和 Python 的自动化 3D 模型处理工作流，支持模型导入、格式转换、变换操作、材质添加、网格优化等功能。

游戏经历



18098302488
2971762643@qq.com
李东盛

PORTFOLIO

