


VLAN 11 client

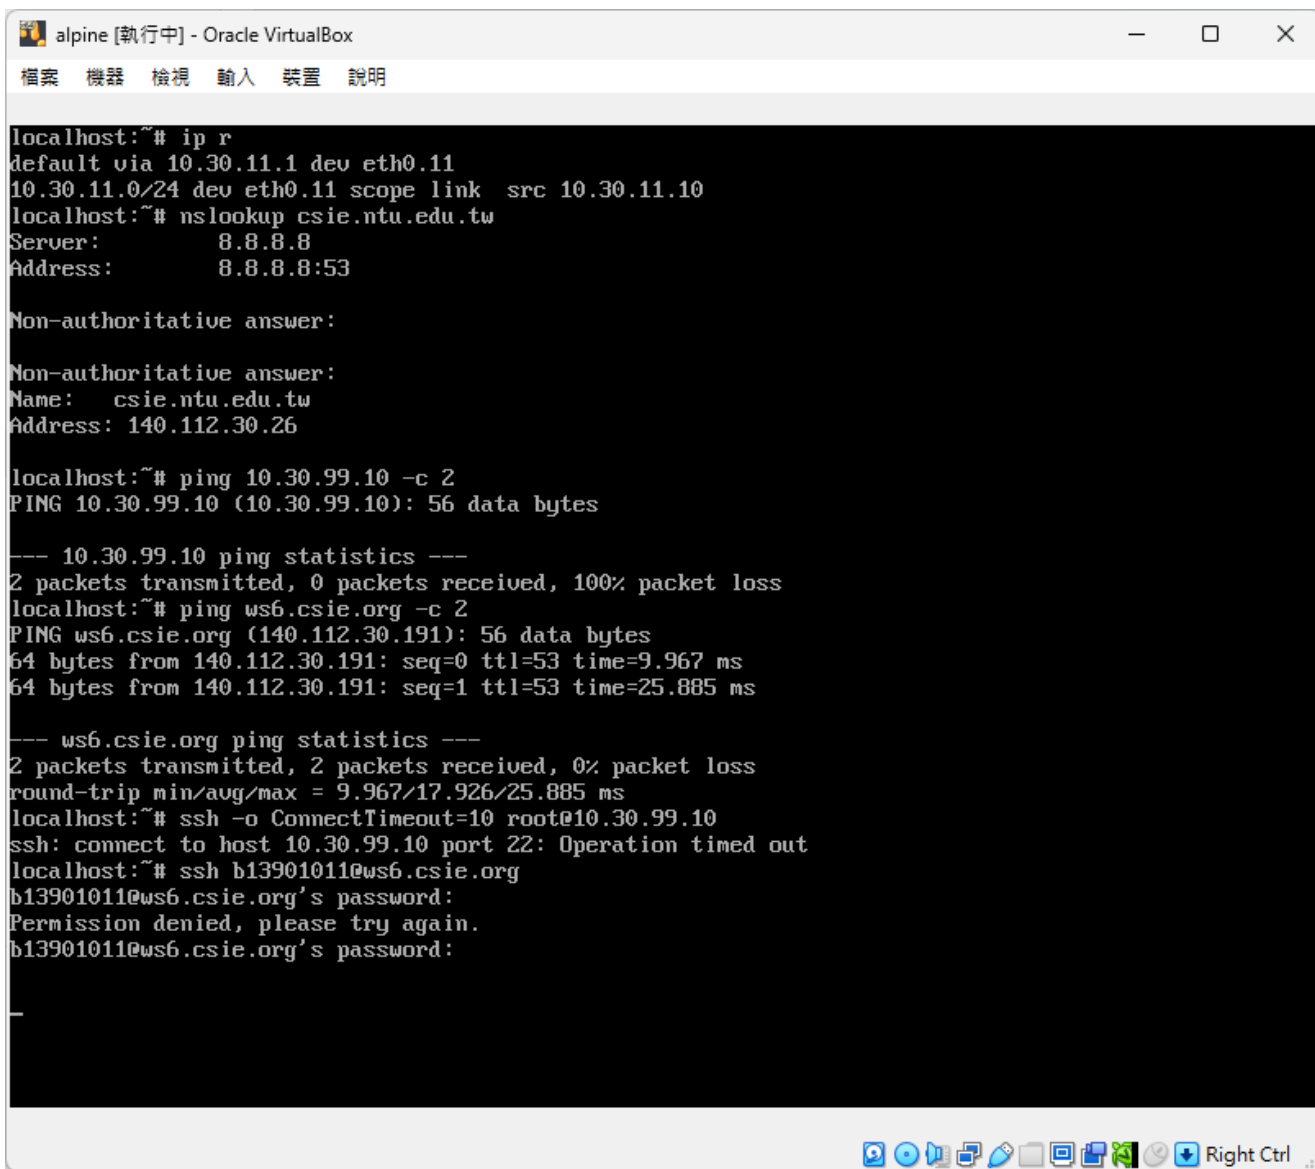

```
alpine [執行中] - Oracle VirtualBox
檔案 機器 檢視 輸入 裝置 說明

localhost:~# ip r
default via 10.30.11.1 dev eth0.11
10.30.11.0/24 dev eth0.11 scope link src 10.30.11.10
localhost:~# nslookup csie.ntu.edu.tw
Server:      8.8.8.8
Address:     8.8.8.8:53

Non-authoritative answer:


Non-authoritative answer:
Name:   csie.ntu.edu.tw
Address: 140.112.30.26

localhost:~# ping 10.30.99.10 -c 2
PING 10.30.99.10 (10.30.99.10): 56 data bytes

--- 10.30.99.10 ping statistics ---
2 packets transmitted, 0 packets received, 100% packet loss
localhost:~# ping ws6.csie.org -c 2
PING ws6.csie.org (140.112.30.191): 56 data bytes
64 bytes from 140.112.30.191: seq=0 ttl=53 time=9.967 ms
64 bytes from 140.112.30.191: seq=1 ttl=53 time=25.885 ms

--- ws6.csie.org ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max = 9.967/17.926/25.885 ms
localhost:~# ssh -o ConnectTimeout=10 root@10.30.99.10
ssh: connect to host 10.30.99.10 port 22: Operation timed out
localhost:~# ssh b13901011@ws6.csie.org
b13901011@ws6.csie.org's password:
Permission denied, please try again.
b13901011@ws6.csie.org's password:
-
```

VLAN 99 client

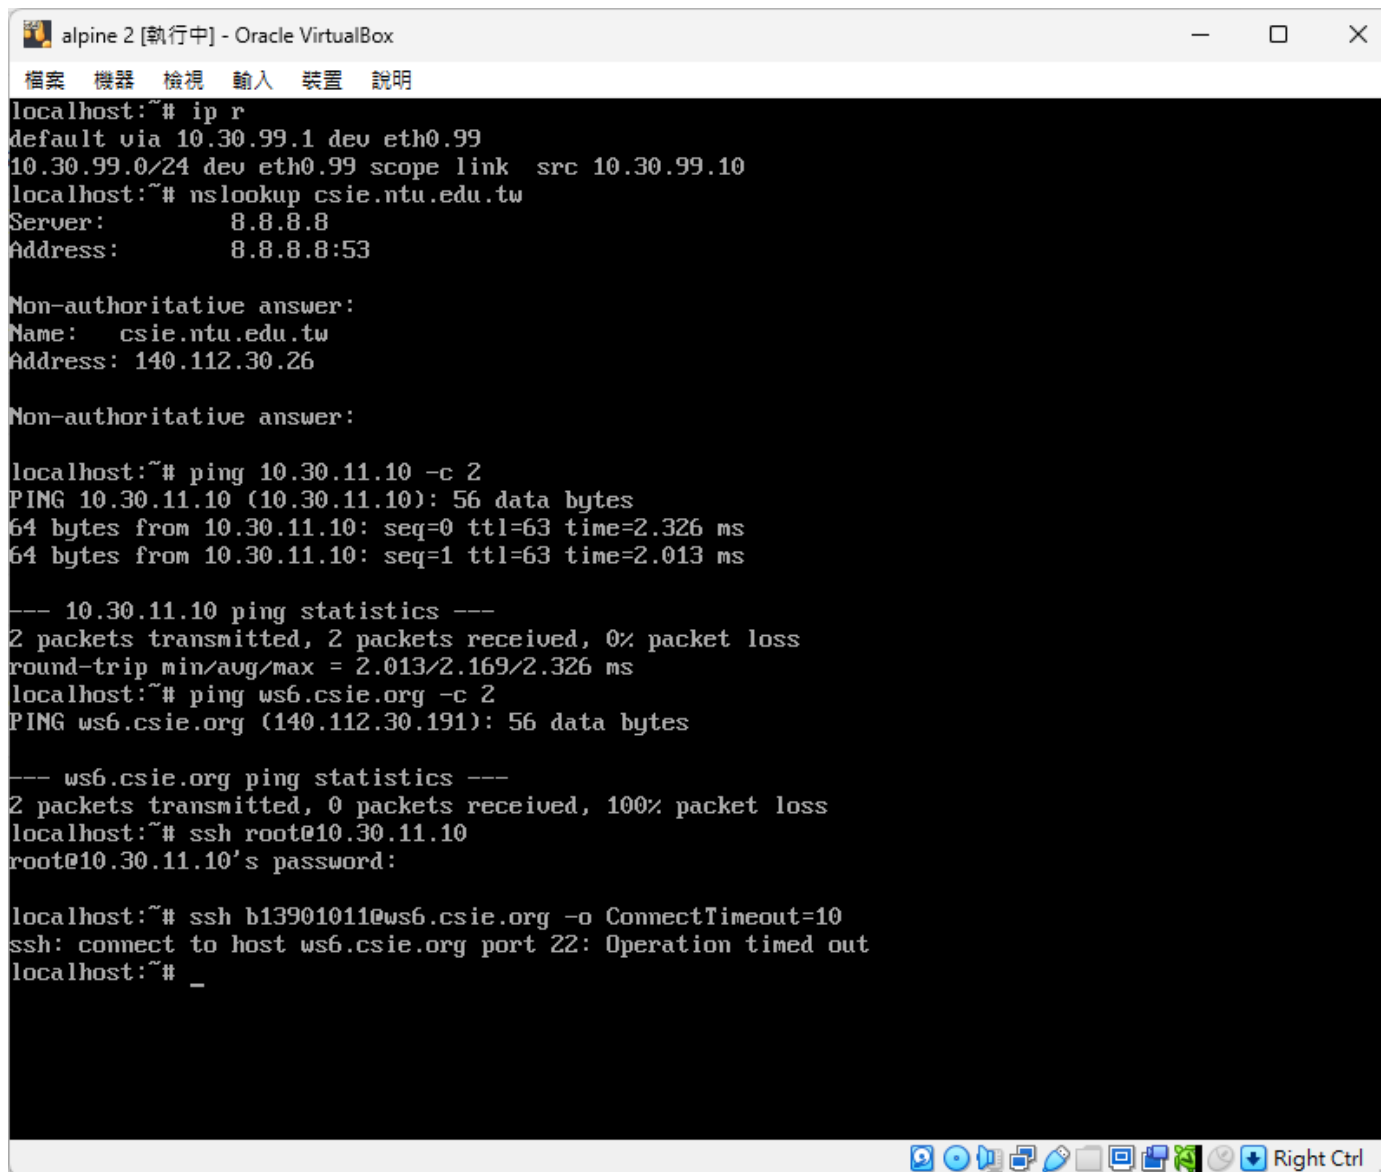

```
alpine 2 [執行中] - Oracle VirtualBox
檔案 機器 檢視 輸入 裝置 說明
localhost:~# ip r
default via 10.30.99.1 dev eth0.99
10.30.99.0/24 dev eth0.99 scope link src 10.30.99.10
localhost:~# nslookup csie.ntu.edu.tw
Server:      8.8.8.8
Address:     8.8.8.8:53

Non-authoritative answer:
Name:   csie.ntu.edu.tw
Address: 140.112.30.26

Non-authoritative answer:

localhost:~# ping 10.30.11.10 -c 2
PING 10.30.11.10 (10.30.11.10): 56 data bytes
64 bytes from 10.30.11.10: seq=0 ttl=63 time=2.326 ms
64 bytes from 10.30.11.10: seq=1 ttl=63 time=2.013 ms

--- 10.30.11.10 ping statistics ---
2 packets transmitted, 2 packets received, 0% packet loss
round-trip min/avg/max = 2.013/2.169/2.326 ms
localhost:~# ping ws6.csie.org -c 2
PING ws6.csie.org (140.112.30.191): 56 data bytes

--- ws6.csie.org ping statistics ---
2 packets transmitted, 0 packets received, 100% packet loss
localhost:~# ssh root@10.30.11.10
root@10.30.11.10's password:

localhost:~# ssh b13901011@ws6.csie.org -o ConnectTimeout=10
ssh: connect to host ws6.csie.org port 22: Operation timed out
localhost:~# _
```

VLAN 11 rules

OPNsense
Securing network infrastructure

Lobby

Reporting

System

Interfaces

Firewall

- Aliases
- Automation
- Categories
- Groups
- NAT
- Rules
- Floating
- LAN
- VLAN11
- VLAN99
- WAN
- Shaper
- Settings
- Log Files
- Diagnostics

VPN

Services

Power

Help

Firewall: Rules: VLAN11

Select category

Inspect

You are currently running in live media mode. A reboot will reset the configuration. SSH remote login is enabled for the users "root" and "installer" using the same password.

	Protocol	Source	Port	Destination	Port	Gateway	Schedule	Description	
Automatically generated rules									
☐	IPv4 TCP/UDP	*	*	*	53 (DNS)	*	*		
☐	IPv4 TCP/UDP	*	*	VLAN99 net	22 (SSH)	*	*		
☐	IPv4 ICMP	*	*	VLAN99 net	*	*	*		
☐	IPv4 TCP/UDP	*	*	*	22 (SSH)	*	*		
☐	IPv4 ICMP	*	*	*	*	*	*		
☐	IPv4 *	*	*	*	*	*	*		
☒	pass	☒ block	☒ reject	☒ log	☒ in	☒ first match			
☒	pass (disabled)	☒ block (disabled)	☒ reject (disabled)	☒ log (disabled)	☒ out	☒ last match			
Active/Inactive Schedule (click to view/edit)									
Alias (click to view/edit)									
VLAN11 rules are evaluated on a first-match basis by default (i.e. the action of the first rule to match a packet will be executed). This means that if you use block rules, you will have to pay attention to the rule order. Everything that is not explicitly passed is blocked by default.									

