

the *mailOrder* database is used in many of the examples in the lecture notes, and in some of the labs.

To build the mail order database for the first time:

@create\_mail  
@insert\_mail

To restore the database to its original data:

@clear\_mail  
@insert\_mail

The mail-order database relational schema:

**EMPLOYEES** (ENO, ENAME, ZIP, HDATE)  
**PARTS** (PNO, PNAME, QOH, PRICE, OLEVEL)  
**CUSTOMERS** (CNO, CNAME, STREET, ZIP, PHONE)  
**ORDERS** (ONO, CNO, ENO, RECEIVED, SHIPPED)  
**ODETAILS** (ONO, PNO, QTY)  
**ZIPCODES** (ZIP, CITY)

foreign-key dependency diagram

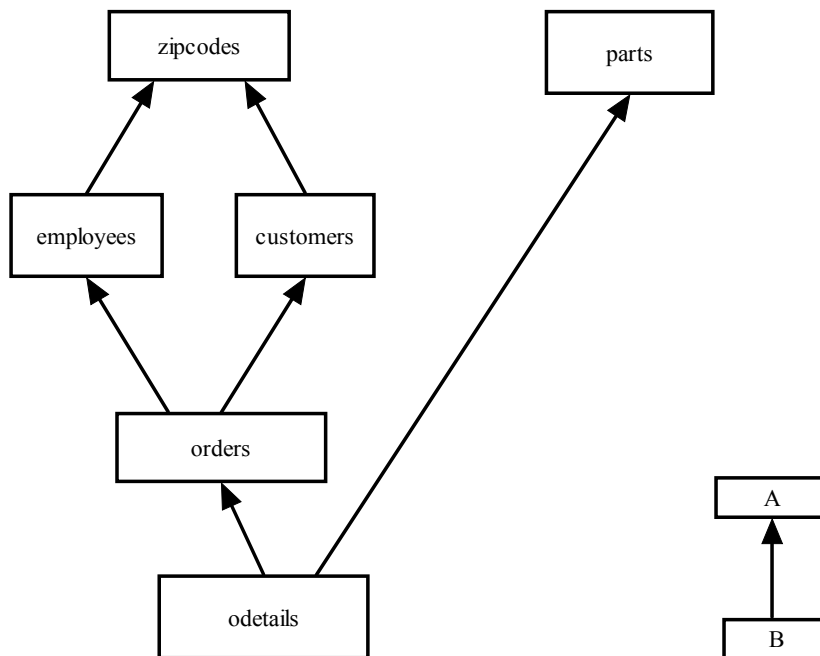


Table B has a foreign key  
to table A; A is a parent table;  
B is a child table;  
table B depends on table A