Automation Questions

11 questions | Original English questions and source answers

Question 1

Which CRUD operation modifies an existing table or view?

Options

A. replace

B. read

C. create

D. update

Answer

D. update

Source explanation

CRUD is short for CREATE, READ, UPDATE and DELETE operations. Only UPDATE operation modifies an existing table or view.

Source: CCNA Training » Automation Quiz.pdf | Question 1

Question 2

Which output displays a JSON data representation?

Options

A. {
“response”- {
“taskId”- {};
“url”-“string”
},
“version”-“string”
}

B. {
“response”:{
“taskId”,{};
“url”,”string”
};
“version”; “string”
}

C. {
“response”,{
“taskId”,{};
“url”,”string”
};
“version”, “string”
}

D. {
“response”:{
“taskId”:{},
“url”:”string”
},
“version”: “string”
}

Answer

D. {
“response”:{
“taskId”:{},
“url”:”string”
},
“version”: “string”
}

Source explanation

JSON data is written as name/value pairs.
A name/value pair consists of a field name (in double quotes), followed by a colon, followed by a value:
“name”:”Mark”
JSON can use arrays. Array values must be of type string, number, object, array, boolean or null. For example:
{
“name”:”John”,
“age”:30,
“cars”:[“Ford”, “BMW”, “Fiat”]
}
JSON can have empty object like “taskId”:{}

Source: CCNA Training » Automation Quiz.pdf | Question 2

Question 3

Which configuration management mechanism uses TCP port 22 by default when communicating with managed
nodes?

Options

A. Ansible

B. Python

C. Chef


D. Puppet

Answer

A. Ansible

Source explanation

TCP port 22 is SSH, which is used by Ansible when communicating with the managed nodes.

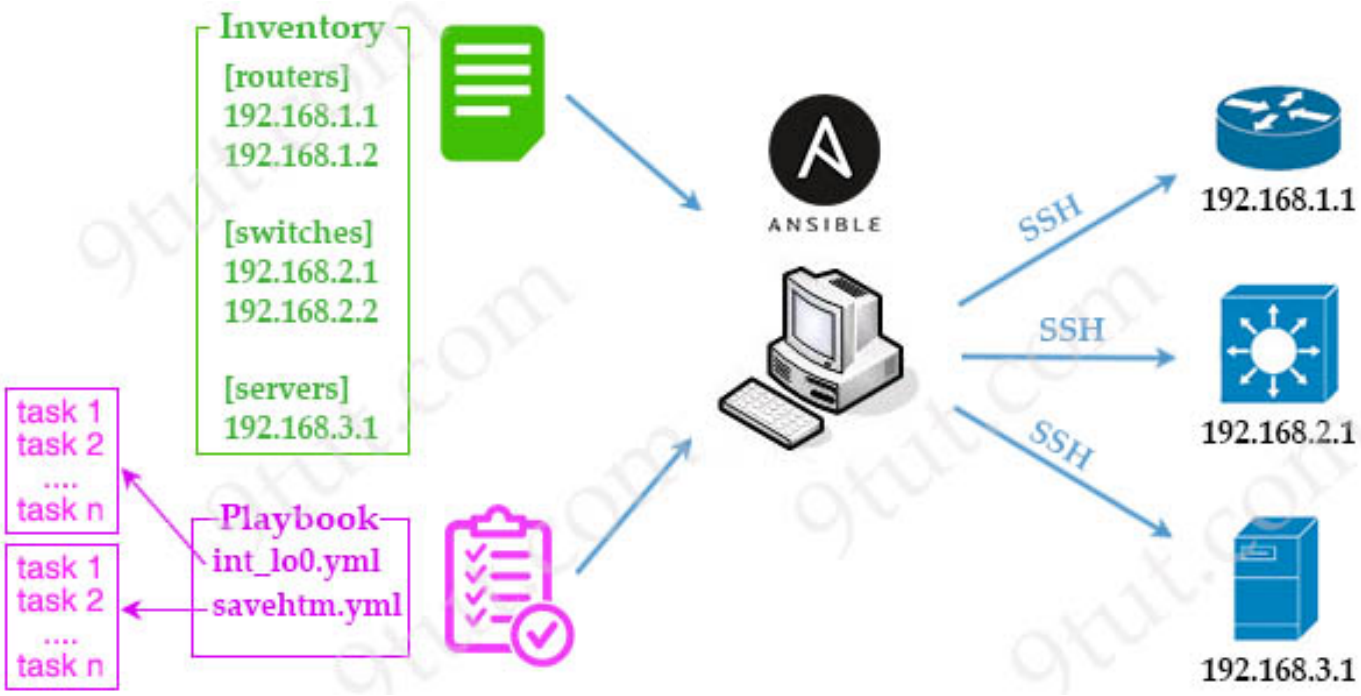

Source: CCNA Training » Automation Quiz.pdf | Question 3

Question 4

What are two benefits of network automation? (Choose two)

Options

A. reduced hardware footprint

B. fewer network failures

C. increased network security

D. faster changes with more reliable results

E. reduced operational costs

Answer

D. faster changes with more reliable results

E. reduced operational costs

Source: CCNA Training » Automation Quiz.pdf | Question 4

Question 5

Which type of API would be used to allow authorized salespeople of an organization access to internal sales data from their mobile devices?

Options

A. partner

B. public

C. open

D. private

Answer

D. private

Source explanation

There are three types of API:
+ Open APIs (Public APIs) – These APIs are publicly available and can be used with no restrictions. Because these APIs are public, many API providers require the user to get a free key, or token, prior to using the API. This is to help control the number of API requests they receive and process.
+ Internal (Private APIs) – These are APIs that are used by an organization or company to access data and services for internal use only. An example of an internal API is allowing authorized salespeople access to internal sales data on their mobile devices.
+ Partner APIs – These are APIs that are used between a company and its business partners or contractors to facilitate business between them. The business partner must have a license or other form of permission to use the API. A travel service using an airline’s API is an example of a partner API.

Source: CCNA Training » Automation Quiz.pdf | Question 5

Question 6

Refer to the exhibit.
cisco_ospf_vrf {'R1 default':
ensure => 'present',
auto_cost => '100',
}
Which type of configuration is represented in the output?

Options

A. Puppet

B. Ansible

C. Chef

D. JSON

Answer

A. Puppet

Source: CCNA Training » Automation Quiz.pdf | Question 6

Question 7

Which two encoding methods are supported by REST APIs? (Choose two)

Options

A. YAML

B. EBCDIC

C. XML

D. JSON

E. SGML

Answer

C. XML

D. JSON

Source explanation

The Application Policy Infrastructure Controller (APIC) REST API is a programmatic interface that uses REST architecture. The API accepts and returns HTTP (not enabled by default) or HTTPS messages that contain JavaScript Object Notation (JSON) or Extensible Markup Language (XML) documents.
Reference: https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/2-x/rest_cfg/2_1_x/b_Cisco_APIC_REST_API_Configuration_Guide/b_Cisco_APIC_REST_API_Configuration_

Source: CCNA Training » Automation Quiz.pdf | Question 7

Question 8

What is a characteristic of the REST API?

Options

A. evolved into what became SOAP

B. considered slow, complex, and rigid

C. most widely used API for web services

D. used for exchanging XML structured information over HTTP or SMTP

Answer

C. most widely used API for web services

Source explanation

REST API is an API that works on top of the HTTP protocol. It defines a set of functions developers can use to perform requests and receive responses via
HTTP protocol such as GET and POST. REST APIs are the most popular API used for web services nowadays.

Source: CCNA Training » Automation Quiz.pdf | Question 8

Question 9

Which option best describes an API?

Options

A. a stateless client-server model

B. request a certain type of data by specifying the URL path that models the data

C. communication often uses either Java scripting, Python, XML, or simple HTTP

D. an architectural style (versus a protocol) for designing applications

Answer

A. a stateless client-server model

Source: CCNA Training » Automation Quiz.pdf | Question 9

Question 10

Which of the following is the JSON encoding of a dictionary or hash?

Options

A. {"key", "value"}

B. ("key": "value")

C. ["key", "value"]

D. {"key": "value"}

Answer

D. {"key": "value"}

Source: CCNA Training » Automation Quiz.pdf | Question 10

Question 11

Which option about JSON is true?

Options

A. used to describe structured data that includes arrays

B. uses predefined tags or angle brackets (<>) to delimit markup text

C. similar to HTML, it is more verbose than XML

D. used for storing information

Answer

A. used to describe structured data that includes arrays

Source explanation

JSON data is written as name/value pairs.
A name/value pair consists of a field name (in double quotes), followed by a colon, followed by a value:
"name":"Mark"
JSON can use arrays. Array values must be of type string, number, object, array, boolean or null.. For example:
{
"name":"John",
"age":30,
"cars":["Ford", "BMW", "Fiat"]
}

Source: CCNA Training » Automation Quiz.pdf | Question 11