

Aarya Vijay Arban

S11-07

Aim: Write a program for creating a Student form

Code:

```
import javax.swing.*;
import java.awt.event.*;

public class Studentform extends JFrame implements ActionListener
{
    JLabel l1,l2,l3,l4,l5;
    JTextField t1,t2;
    JRadioButton r1,r2;
    JComboBox cb;
    JCheckBox c1,c2,c3;
    JButton b;
    JTextArea area;

    Studentform()
    {
        JFrame f=new JFrame(" Student Form");
        JLabel l1=new JLabel("Name: ");
        l1.setBounds(20,20,80,30);
        t1=new JTextField();
        t1.setBounds(100,20,150,30);
        f.add(l1); f.add(t1);

        JLabel l2=new JLabel("Mobile No.: ");
        l2.setBounds(20,70,80,30);
        t2=new JTextField();
        t2.setBounds(100,70,150,30);
```

```
f.add(l2); f.add(t2);
```

```
JLabel l3=new JLabel("Gender: ");
```

```
l3.setBounds(20,120,80,30);
```

```
r1=new JRadioButton("Male");
```

```
r1.setBounds(100,120,60,30);
```

```
r2=new JRadioButton("Female");
```

```
r2.setBounds(180,120,120,30);
```

```
ButtonGroup bg=new ButtonGroup();
```

```
bg.add(r1); bg.add(r2);
```

```
f.add(r1); f.add(r2); f.add(l3);
```

```
JLabel l4=new JLabel("Age");
```

```
l4.setBounds(20,165,80,30);
```

```
String age[]={"18","19","20","21","22","23"};
```

```
cb=new JComboBox(age);
```

```
cb.setBounds(100,170,90,20);
```

```
f.add(l4); f.add(cb);
```

```
JLabel l5=new JLabel("Hobbies");
```

```
l5.setBounds(20,215,50,30);
```

```
f.add(l5);
```

```
c1=new JCheckBox("Reading");
```

```
c1.setBounds(80,220,80,20);
```

```
c2=new JCheckBox("Dancing");
```

```
c2.setBounds(160,220,80,20);
```

```
c3=new JCheckBox("Singing");
```

```
c3.setBounds(250,220,80,20);
```

```
f.add(c1); f.add(c2); f.add(c3);  
JButton b=new JButton("Submit");  
b.setBounds(140,280,75,20);  
f.add(b);
```

```
area=new JTextArea();  
area.setBounds(30,320,320,100);  
f.add(area);  
b.addActionListener(this);
```

```
setDefaultCloseOperation(EXIT_ON_CLOSE);  
f.setSize(400,500);  
f.setLayout(null);  
f.setVisible(true);
```

```
}
```

```
public void actionPerformed(ActionEvent e)
```

```
{
```

```
String name=t1.getText();
```

```
String mobile=t2.getText();
```

```
String gender= r1.isSelected() ? "Male": r2.isSelected() ? "Female":"-";
```

```
String age= cb.getItemAt(cb.getSelectedIndex()).toString();
```

```
String hobby="";
```

```
if(c1.isSelected())
```

```
{
```

```
hobby="Reading";
```

```
}
```

```
if(c2.isSelected())
```

```
{
```

```
hobby=hobby+" "+"Dancing";
```

```

    }


    if(c3.isSelected())
    {
        hobby=hobby+" "+"Singing";
    }

    area.setText("Name:"+name+"\n"+"Mobile
Number:"+mobile+"\n"+"Gender:"+gender+"\n"+"Age:"+age+"\n"+"Hobbies:"+hobby);
}

public static void main(String[] args)
{
    new Studentform();
}
}

```

Output:

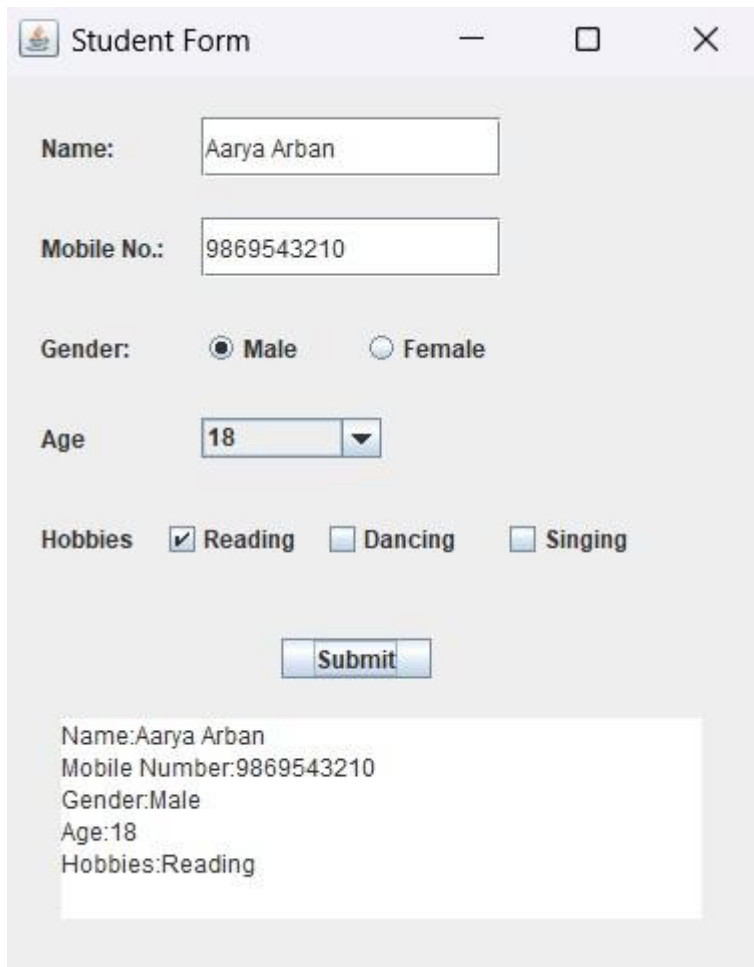

The screenshot shows a Java Swing window titled "Student Form". The window contains the following elements:

- Name:** A text field containing "Aarya Arban".
- Mobile No.:** A text field containing "9869543210".
- Gender:** Two radio buttons, "Male" (selected) and "Female".
- Age:** A spin box set to "18".
- Hobbies:** Three checkboxes: "Reading" (checked), "Dancing", and "Singing".
- Submit:** A button labeled "Submit".
- Output Area:** A text area at the bottom displaying the following text:


```

Name:Aarya Arban
Mobile Number:9869543210
Gender:Male
Age:18
Hobbies:Reading
      
```

