AIPI 510 / MODULE PROJECT 2

Can one minute represent five?

Continuous vs distributed observation at Abbey Road



Abbey Road crossing, context photograph
Source: Abbey Road Studios (2019)

Aarya Deshpande • Tanya Sharma


Same window, different moments

Full count
5 minutes
43

10:25–10:30 GMT, November 3

A One continuous 60-second block



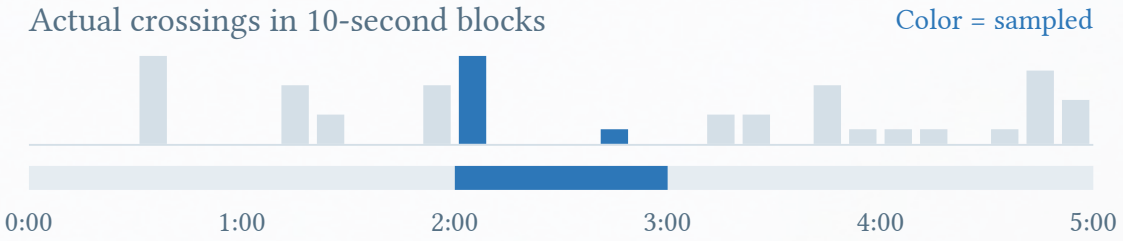


7 observed × 5

Absolute error: 8

35
estimate

B Six distributed 10-second blocks



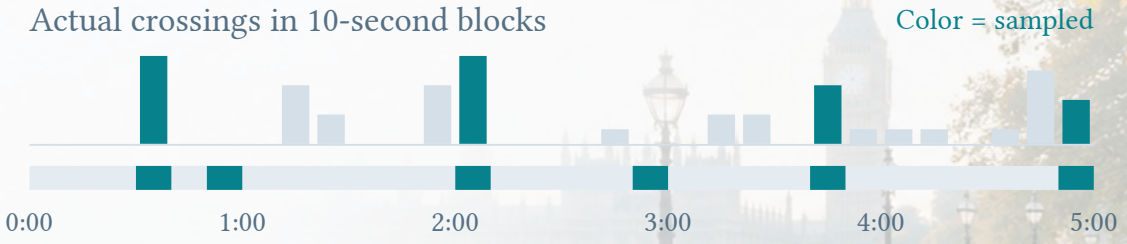

19 observed × 5

Absolute error: 52


95
estimate

The sampling intervals can land on very different moments.

Street scenes: AI illustrations. Timelines and counts: actual logged events from recording 13.

Two sampling methods

Both methods use 60 seconds out of a five-minute window.

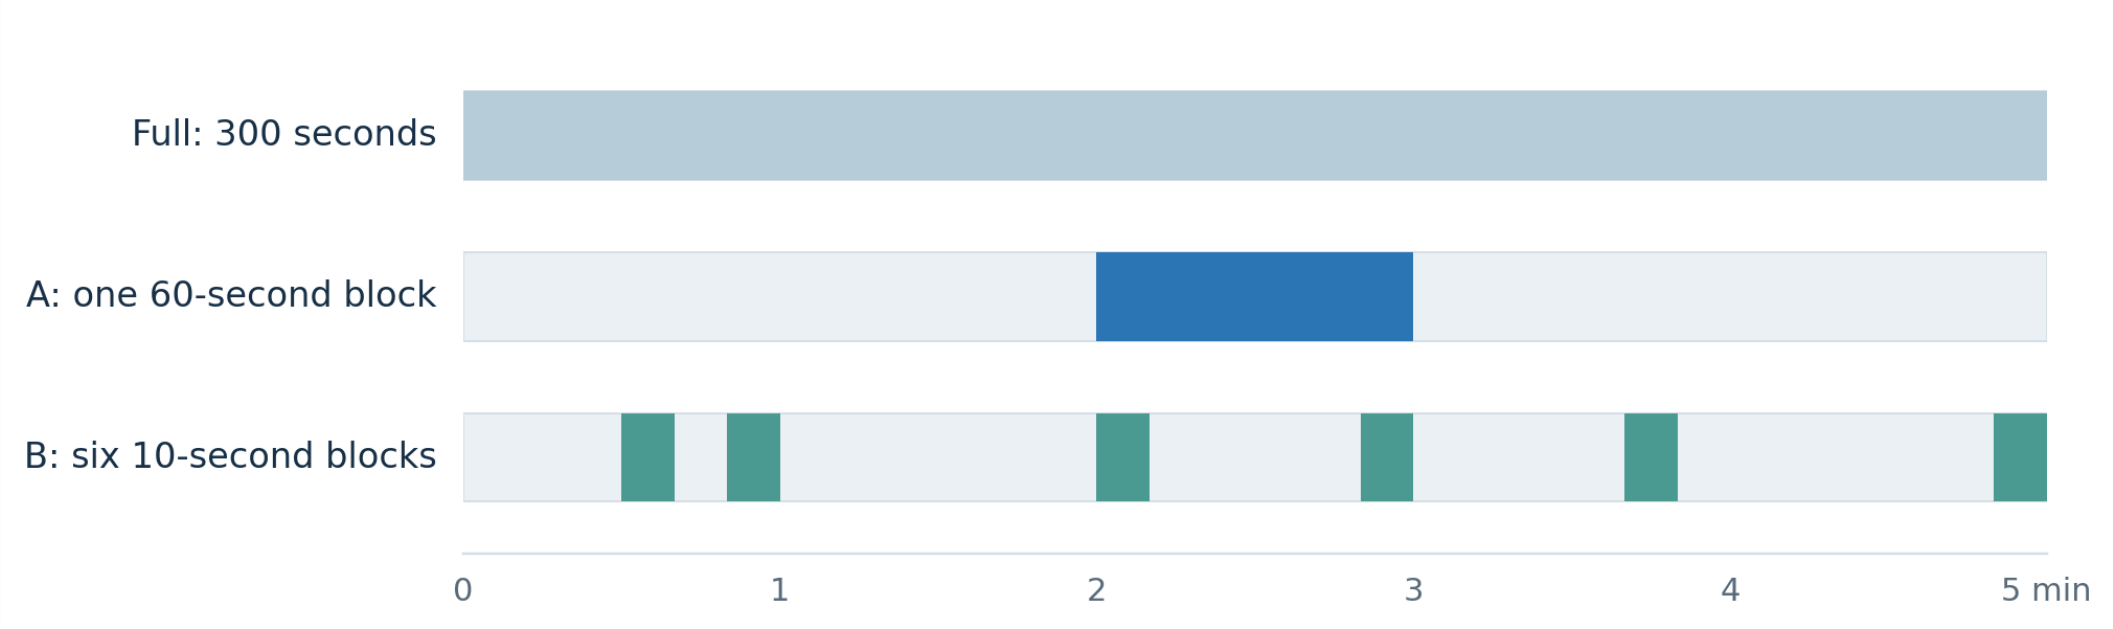

Estimated total = sample count × 5 • Error = |estimate − full count|

AI-generated background illustration

36 windows, sampled before we counted

One camera · one London day · eight hourly strata

36

five-minute windows

828

recorded crossings

60 s

observed by each method

Randomized 5-minute slots and interval positions


Seed 20 261 103 · assumed d_z = 0.5 · nominal independent-pair power ≈ 83%

H_0: μ_D = 0 H_1: μ_D ≠ 0 D = absolute error A − absolute error B

AI-generated background illustration

The average errors were almost identical

Absolute estimation error in pedestrians per five-minute window

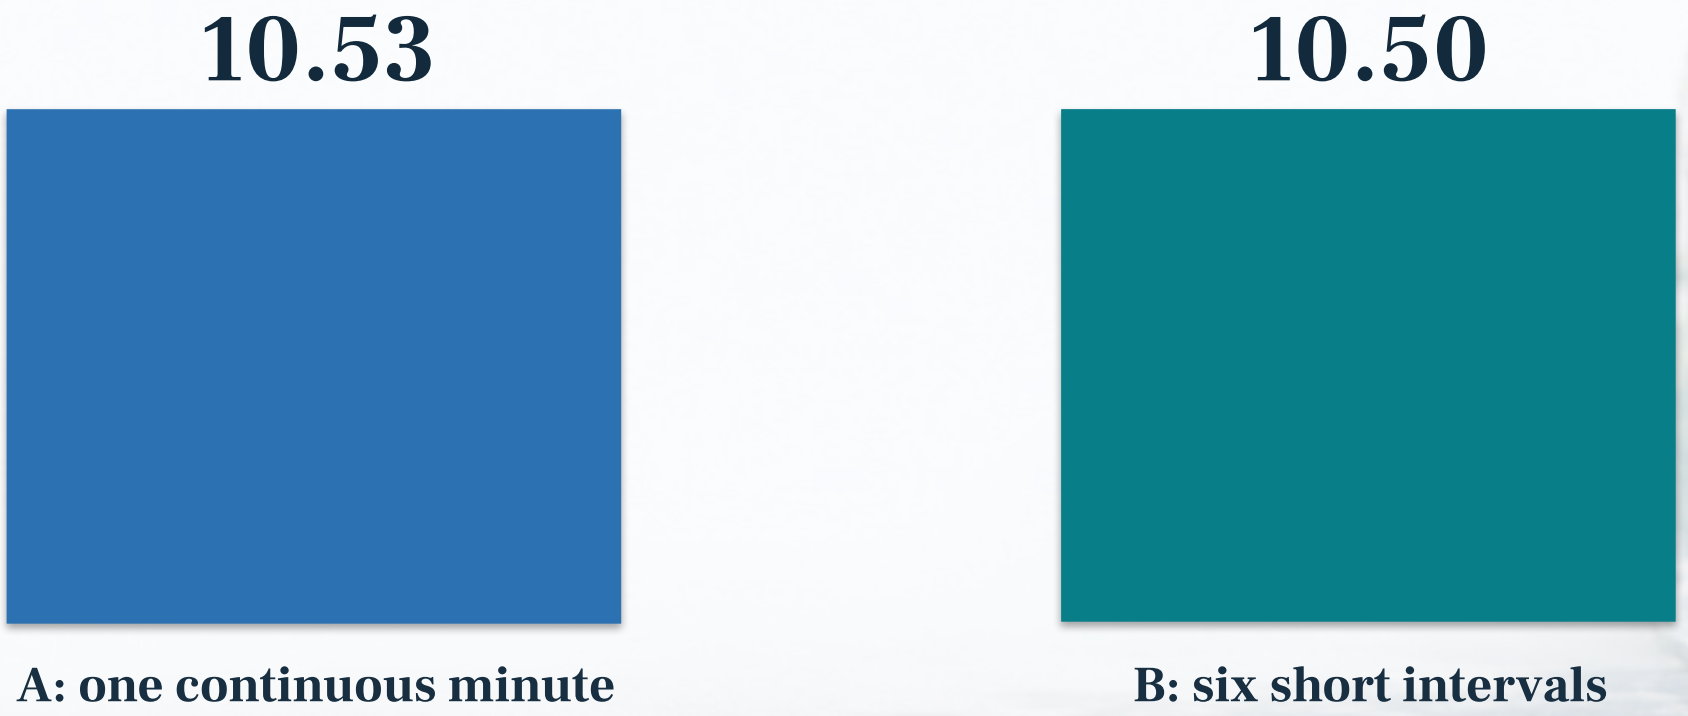


15 windows favor A • 15 favor B • 6 ties

AI-generated background illustration

The mean difference remains uncertain

Paired mean difference (A absolute error − B absolute error)

95% confidence interval: −4.46 to +4.51 pedestrians

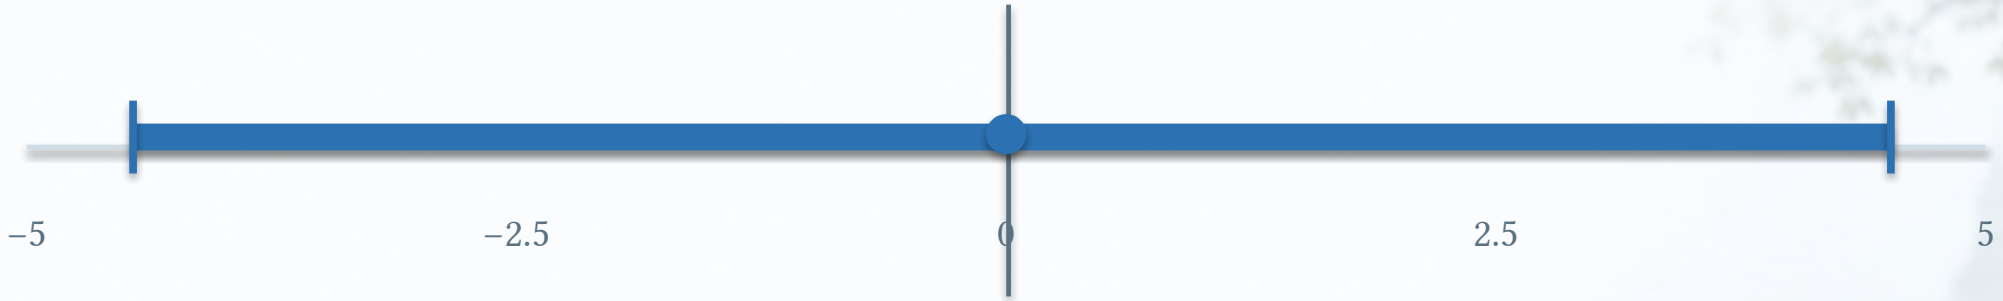

+0.03	0.990	36
mean difference	paired t-test p-value	paired windows

Cohen's d_z = 0.002 · paired and hour-cluster sign-flip p = 1.000

AI-generated background illustration

Limitations

All 36 retained after the observer confirmed visibility during counting.

01 **One camera and one day**

We sampled eight hours on one Tuesday.

02 **Nearby windows may correlate**

There are 36 windows within eight hourly groups.

03 **Varying playback speeds**

Groups and reaction delay can affect timed counts.

04 **One observer and one event log**

No independent recount; reference and samples share annotations.

AI-generated background illustration

THE TAKEAWAY

Neither method showed a clear accuracy advantage

Similar averages do not establish equivalent accuracy.

Next: more days, more sites, independent counting checks.

Source: abbeyroad.com/crossing | 36 observer-confirmed windows, Nov 3, 2026