

Submitted By : Anuj Pawadia

Roll No: R2142220311

Sap id:500107126

Lab Exercise 02

Working With Hosts and Groups

Objective: To work with hosts both individually and in groups for streamlined management and deployment across your network infrastructure

Tools required: Ubuntu OS

Prerequisites: You need to have Ansible, and the nodes connected with it installed to proceed with this demo. Refer Demo 1 of Lesson 3.

Steps to be followed:

1. List the hosts present in your host file
2. Create a file on the host
3. Remove the file from the host
4. Create and remove the file on the hosts using the group
5. Update the hosts using the group

Step 1: List the hosts present in your host file

1.1 Use the following command to list the hosts in your inventory file:

ansible all --list-hosts

```
red Hat 7.3.1-177]
[devops@ip-172-31-42-193 .ssh]$ ansible all --list-hosts
 hosts (2):
  172.31.34.198
  172.31.45.85
[devops@ip-172-31-42-193 .ssh]$ |
```

Note: The host list might change as per your system.

Step 2: Create a file on the host

2.1 Use the following command to list the contents of the current working directory:

ansible 172.31.44.85 -a "ls"

```
[devops@ip-172-31-42-193 .ssh]$ ansible 172.31.34.198 -a "ls"
[WARNING]: Platform linux on host 172.31.34.198 is using the discovered Python
interpreter at /usr/bin/python, but future installation of another Python
interpreter could change this. See https://docs.ansible.com/ansible/2.9/referen
ce_appendices/interpreter_discovery.html for more information.
172.31.34.198 | CHANGED | rc=0 >>
```

Note: You can create the file on any other host as per your host list.

2.2 Use the following command to create a file named **file1** on the host:

ansible 172.31.44.85 -a "touch file1"

```
[devops@ip-172-31-42-193 .ssh]$ ansible 172.31.34.198 -a "touch file1"
[WARNING]: Consider using the file module with state=touch rather than running
'touch'. If you need to use command because file is insufficient you can add
'warn: false' to this command task or set 'command_warnings=False' in
ansible.cfg to get rid of this message.
[WARNING]: Platform linux on host 172.31.34.198 is using the discovered Python
interpreter at /usr/bin/python, but future installation of another Python
interpreter could change this. See https://docs.ansible.com/ansible/2.9/referen
ce_appendices/interpreter_discovery.html for more information.
172.31.34.198 | CHANGED | rc=0 >>

[devops@ip-172-31-42-193 .ssh]$ ansible 172.31.34.198 -a "ls"
[WARNING]: Platform linux on host 172.31.34.198 is using the discovered Python
interpreter at /usr/bin/python, but future installation of another Python
interpreter could change this. See https://docs.ansible.com/ansible/2.9/referen
ce_appendices/interpreter_discovery.html for more information.
172.31.34.198 | CHANGED | rc=0 >>
file1
```

Step 3: Remove the file from the host

3.1 Now, run the following command to remove the file from the host:

ansible 172.31.44.85 -a "rm file1"


```
[devops@ip-172-31-42-193 .ssh]$ ansible 172.31.34.198 -a "rm file1"
[WARNING]: Consider using the file module with state=absent rather than running
'rm'. If you need to use command because file is insufficient you can add
'warn: false' to this command task or set 'command_warnings=False' in
ansible.cfg to get rid of this message.
[WARNING]: Platform linux on host 172.31.34.198 is using the discovered Python
interpreter at /usr/bin/python, but future installation of another Python
interpreter could change this. See https://docs.ansible.com/ansible/2.9/reference_
appendices/interpreter_discovery.html for more information.
172.31.34.198 | CHANGED | rc=0 >>

[devops@ip-172-31-42-193 .ssh]$ ansible 172.31.34.198 -a "ls"
[WARNING]: Platform linux on host 172.31.34.198 is using the discovered Python
interpreter at /usr/bin/python, but future installation of another Python
interpreter could change this. See https://docs.ansible.com/ansible/2.9/reference_
appendices/interpreter_discovery.html for more information.
172.31.34.198 | CHANGED | rc=0 >>

[devops@ip-172-31-42-193 .ssh]$
```

Step 4: Create and remove the file on the hosts using the group

- 4.1 Run the following command to create a new file on both the hosts using the group:
ansible dbservers -a "touch Ansible_learners"

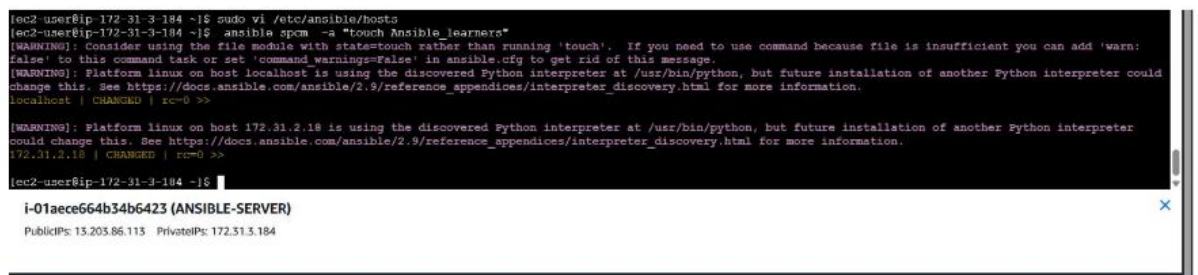


```
[ec2-user@ip-172-31-3-184 ~]$ sudo vi /etc/ansible/hosts
[ec2-user@ip-172-31-3-184 ~]$ ansible spcm -a "touch Ansible_learners"
[WARNING]: Consider using the file module with state=touch rather than running 'touch'. If you need to use command because file is insufficient you can add 'warn:
false' to this command task or set 'command_warnings=False' in ansible.cfg to get rid of this message.
[WARNING]: Platform linux on host localhost is using the discovered Python interpreter at /usr/bin/python, but future installation of another Python interpreter could
change this. See https://docs.ansible.com/ansible/2.9/reference_appendices/interpreter_discovery.html for more information.
localhost | CHANGED | rc=0 >>

[WARNING]: Platform linux on host 172.31.2.18 is using the discovered Python interpreter at /usr/bin/python, but future installation of another Python interpreter
could change this. See https://docs.ansible.com/ansible/2.9/reference_appendices/interpreter_discovery.html for more information.
172.31.2.18 | CHANGED | rc=0 >>

[ec2-user@ip-172-31-3-184 ~]$
```

i-01aece664b34b6423 (ANSIBLE-SERVER)
PublicIPs: 13.203.86.113 PrivateIPs: 172.31.3.184

- 4.2 Use the following command to list the contents of the current working directory of
all the hosts present in the group:
ansible dbservers -a "ls"

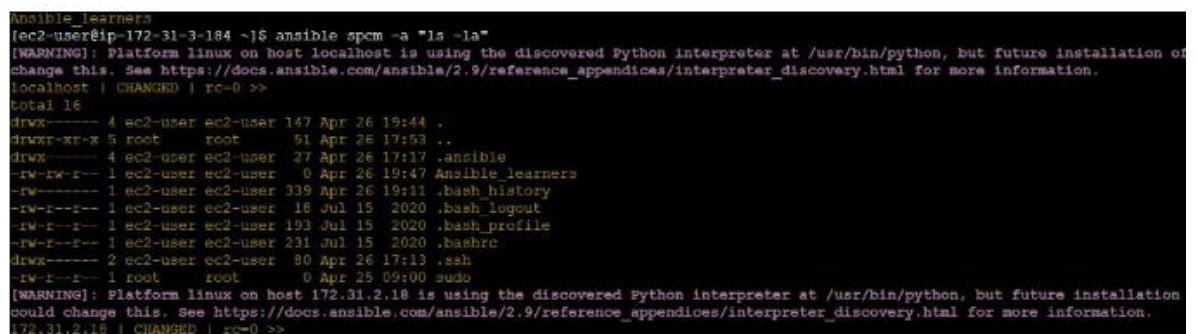

```
Ansible_learners
[ec2-user@ip-172-31-3-184 ~]$ ansible spcm -a "ls -la"
[WARNING]: Platform linux on host localhost is using the discovered Python interpreter at /usr/bin/python, but future installation of
change this. See https://docs.ansible.com/ansible/2.9/reference_appendices/interpreter_discovery.html for more information.
localhost | CHANGED | rc=0 >>
total 16
drwx----- 4 ec2-user ec2-user 147 Apr 26 19:44 .
drwxr-xr-x 5 root root 51 Apr 26 17:53 ..
drwx----- 4 ec2-user ec2-user 27 Apr 26 17:17 .ansible
-rw-rw-r-- 1 ec2-user ec2-user 0 Apr 26 19:47 Ansible_learners
-rw----- 1 ec2-user ec2-user 339 Apr 26 19:11 .bash_history
-rw-r--r-- 1 ec2-user ec2-user 18 Jul 15 2020 .bash_logout
-rw-r--r-- 1 ec2-user ec2-user 193 Jul 15 2020 .bash_profile
-rw-r--r-- 1 ec2-user ec2-user 231 Jul 15 2020 .bashrc
-rwx----- 2 ec2-user ec2-user 80 Apr 26 17:13 .ssh
-rw-r--r-- 1 root root 0 Apr 25 09:00 sudo
[WARNING]: Platform linux on host 172.31.2.18 is using the discovered Python interpreter at /usr/bin/python, but future installation
could change this. See https://docs.ansible.com/ansible/2.9/reference_appendices/interpreter_discovery.html for more information.
172.31.2.18 | CHANGED | rc=0 >>
```

- 4.3 Run the following command to remove the file on both hosts using the group:
ansible dbservers -a "rm Ansible_learners"

```
drwx----- 2 devops devops 28 Apr 25 09:18 .ssh
[ec2-user@ip-172-31-3-184 ~]$ ansible specm -a "rm Ansible_learners"
[WARNING]: Consider using the file module with state=absent rather than running 'rm'. If you need to use command because file is
False' to this command task or set 'command_warnings=False' in ansible.cfg to get rid of this message.
[WARNING]: Platform linux on host localhost is using the discovered Python interpreter at /usr/bin/python, but future installation
change this. See https://docs.ansible.com/ansible/2.9/reference_appendices/interpreter_discovery.html for more information.
localhost | CHANGED | rc=0 >>

[WARNING]: Platform linux on host 172.31.2.18 is using the discovered Python interpreter at /usr/bin/python, but future installation
could change this. See https://docs.ansible.com/ansible/2.9/reference_appendices/interpreter_discovery.html for more information.
172.31.2.18 | CHANGED | rc=0 >>

[ec2-user@ip-172-31-3-184 ~]$
```