

C programming⁷

Aaryan chavda

August 2025

1 example 7:hours to minutes

```
#include <stdio.h>

int main() {

    float minutes, hours;
    printf("Enter hours :");
    scanf("%f",&hours);
    printf("minutes = %.1f\n",hours * 60);
    return 0;
}
```

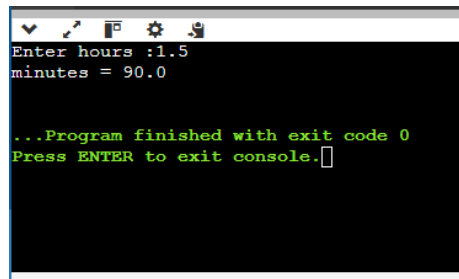


Figure 1: Enter Caption