

C programming9

Aaryan chavda

August 2025

1 example 9: Dollars into Rupees

```
#include <stdio.h>

int main() {

    float dollars, rupees;
    printf("Enter dollars :");
    scanf("%f",&dollars);
    printf("rupees = %.2f\n", dollars * 48);
    return 0;
}
```

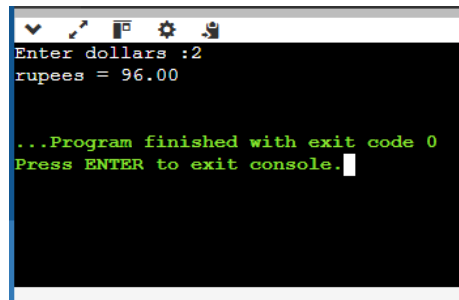


Figure 1: Enter Caption