


## Q1


### Get users 200

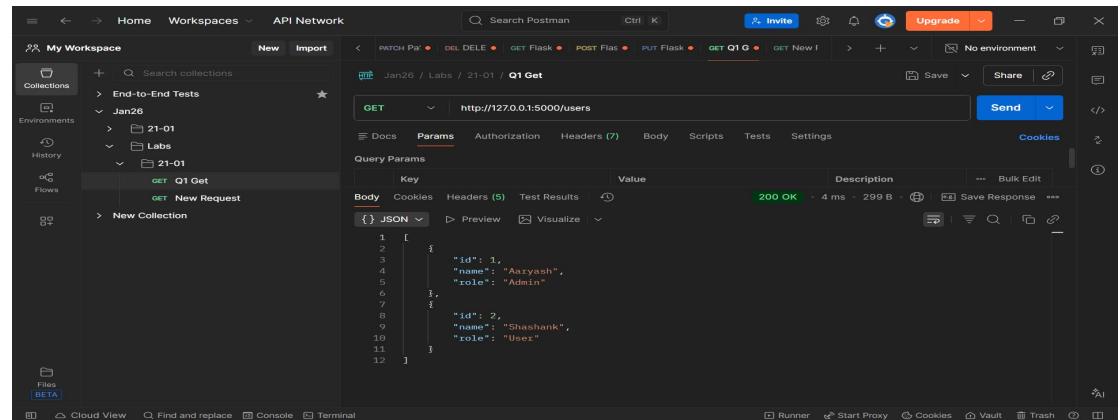

Postman screenshot showing a successful GET request to `http://127.0.0.1:5000/users`. The response status is 200 OK, and the JSON body contains two user objects:

```
[{"id": 1, "name": "Aaryash", "role": "Admin"}, {"id": 2, "name": "Shashank", "role": "User"}]
```


### Get user by id 200

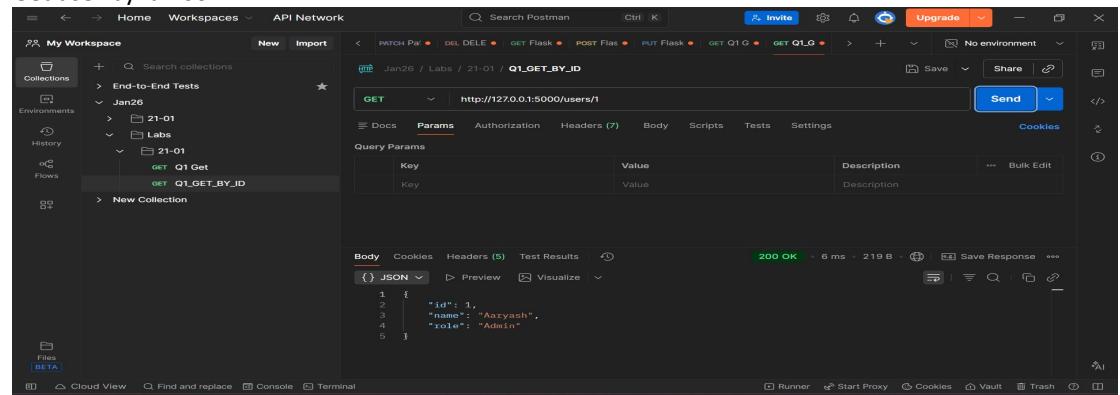

Postman screenshot showing a successful GET request to `http://127.0.0.1:5000/users/1`. The response status is 200 OK, and the JSON body contains one user object:

```
{"id": 1, "name": "Aaryash", "role": "Admin"}
```


### Post 201

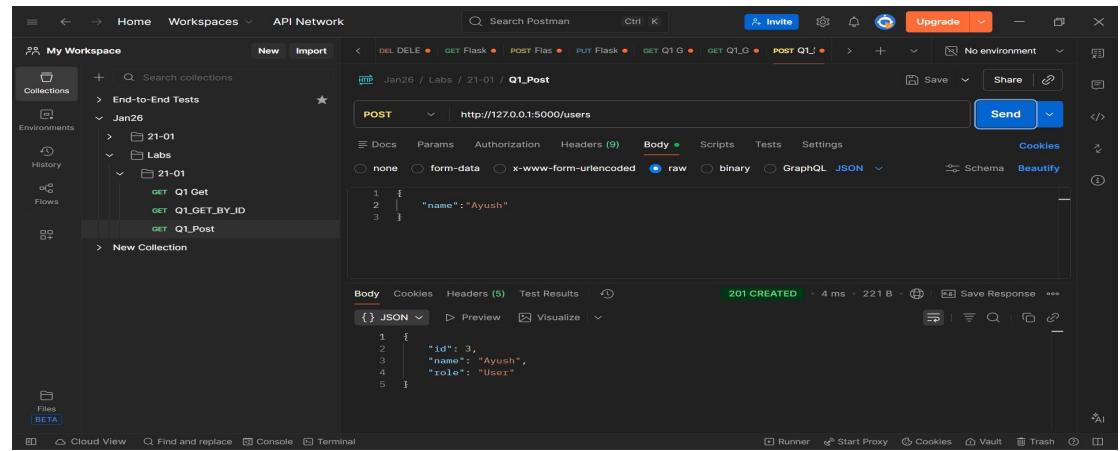

Postman screenshot showing a successful POST request to `http://127.0.0.1:5000/users`. The response status is 201 CREATED, and the JSON body contains a new user object:

```
{"id": 3, "name": "Ayush", "role": "User"}
```

### 404

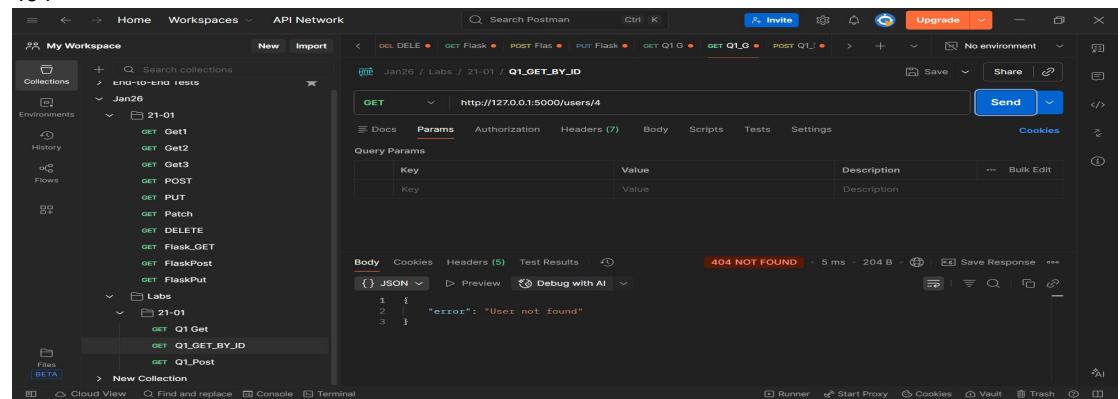

Postman screenshot showing a failed GET request to `http://127.0.0.1:5000/users/4`. The response status is 404 NOT FOUND, and the JSON body contains an error message:

```
{"error": "User not found"}
```