



“Sky Line”

Premium Template By iDangero.us

Documentation

Thank you for purchasing this item. If you have any questions that are beyond the scope of this help file, please feel free to contact us via support ticket form [here](#).

Table of Contents

1. About “Sky Line”
2. Sky Line - Files & Folders Structure
3. Sky Line Themes
4. Installation
5. Sky Line Settings/Configuration
6. HTML Structure
 - 6.1 Fancy Theme HTML Structure
 - 6.2 Toolbar (Dashboard)
 - 6.3 Zoom Slider & Its Configuration
 - 6.4 Portfolio
 - 6.5 Intro Section
 - 6.6 Bottom Modules
 - 6.7 Twitter Feed
 - 6.8 O.S Theme HTML Structure
 - 6.9 O.S Theme Toolbar (Dashboard)
7. Tooltips
8. Work With Windows
9. Windows HTML Structure
10. Typography
11. CSS Files
12. PSD Files and Structure
13. Customization (Change Backgrounds, etc)
14. JavaScripts
15. Ajax Contact Form
16. Licensing Terms

1. About “Sky Line”

Skyline is a "Desktop Style" Ajax based animated website template, designed by the iDangero.us team. This template is perfect for small business websites, IT projects, or it can be used as a fashion site, landing page, etc.


Page content is displayed in the windows that you can drag, resize and minimize (and later expand). You can put any content (flash, html, php, iframe etc.) inside the "window". Due to the use of Ajax, your users do not need to wait the reloading of entire site. All content pages are loading "on the fly".

Smooth and good looking animation and Ajax features of this template are realized with JavaScript jQuery, jQuery UI libraries and CSS3.

This template is easy to redesign, it has very simple and clear API.

2. Sky Line - Files & Folders Structure

Sky Line files are located in the **skyline/** folder from the downloaded archive:

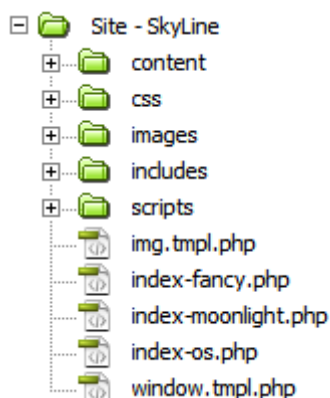

content: in this folder there are .php files with content pages.

css: folder with a .css files for different color themes

folio: php files with an additional folio items content

images: here you can find layouts images and icons used in this Template and for other color themes.

includes: here are php files with slider, toolbar, modules, portfolio, intro and email statuses.

scripts: JavaScripts and PHP scripts used in this template

img.tmpl.php and **window.tmpl.php** in the root folder are window layout templates (for image and content)

And three index files for different themes: **index-fancy.php**, **index-moonlight.php** and **index-os.php** in the root folder

3. Sky Line Themes

Sky Line comes with three different color themes/layouts:

Fancy Theme



Fancy Theme comes with:

- 4x3 icons dashboard
- Zoom Slider Section
- Carousel Portfolio
- Bottom Modules with Twitter Feed
- Full Windows API
- Animated Intro

Moonlight Theme



Moonlight Theme is almost the same as the Fancy, but it have changed color theme, 6x2 icons dashboard and a little different slider and portfolio layouts

O.S Theme



O.S Theme is a simplified version of previous themes. It comes without Zoom Slider, without portfolio. It has not bottom modules and Twitter feed. But it simple and clear, and comes with a full Windows API. There is an icons dashboard with a great "Jump/Fly" animation instead of bottom modules. It also has the animated Intro

4. Installation

To install **Sky Line** template you have to copy all files & folders from the **skyline/** folder to your web-site root folder on the server (It could be a real server or local testing server). Then you have to choose which skyline theme you will use. If you will use Fancy theme, just rename **index-fancy.php** to **index.php** file.

5. Sky Line Settings/Configuration

Before you'll start to customize template you'll need to configure it. Configuration files are located in the **scripts/** folder. So every Theme has its own configuration file:

- ***skyline-fancy.settings.js*** for Fancy theme
- ***skyline-moonlight.settings.js*** for Moonlight theme
- ***skyline-os.settings.js*** for O.S theme

Fancy and Moonlight configuration files are the same, O.S settings file is simplified version of previous ones. So let's look at the Fancy theme configuration file. Open it with any text editor:

```
1 sliderParams = {
2     loader : "#slide-loader",
3     slide : ".slide",
4     nextTrigger : ".slide-next",
5     prevTrigger : ".slide-prev",
6     offsetX1 : "0",
7     offsetX2 : "0",
8     offsetY : "-20",
9     rotateAngle1 : "0",
10    rotateAngle2 : "0",
11    scale : 1.2,
12    animationTime : 1500
13 }
14 skyline = {
15     fixModHeight : true,
16     disableCSS3Transforms : false,
17     toolTipShowTime : 600,
18     folioSlideTime : 600,
19     animateBackground : false,
20     animateBottom : false,
21     windowColor : "black",
22     defaultWindowWidth : 700,
23     contentWindowToolbar : "ribbon",
24     imageWindowToolbar : "fancy",
25     withScrollBar : true,
26     openWindowTime : 400,
27     minimizeWindowTime : 400,
28     expandWindowTime : 400,
29     rotateWindows : false,
```

More about slider settings in the
Slider section

Read about these variables below

```

30     windowFromLink : true,
31     replaceFonts :
".cufoned,.toolbar-icon,.window-heading,.inner-heading,.dropcap,.slide-heading,.module-title,.folio-
o-title,.intro-heading",
32     noFadeInIE6_8 : true,
33     showIntro : true,
34     introSlideDuration : 5000,
35     introStartTransform : "scale(0) translate(-100px,0px) rotate(15deg)",
36     introFinalTransform : "scale(1) translate(0px,-50px) rotate(0deg)",
37     twitter : {
38         container : "#tweets",
39         username : "nolimits4web",
40         numberOfTweets : 1,
41         tweetFormat : '<li class="single-tweet">'
42                     + '<p class="tweet-text">'
43                     + '<a class="twUname" href="http://twitter.com/%username">%username</a>:'
44                     + '%tweetText'
45                     + '</p>'
46                     + '<p class="tweet-date">on %tweetDate</p>'
47                     + '</li>'
48     }
49 }

```

Read about these variables in
Twitter Feed section

fixModHeight

It can be **true** or **false**. If **true**, then all bottom modules will be the same height.

disableCSS3Transforms

It can be **true** or **false**. If **true**, then all CSS3 transform effects (rotates, scales, etc) will be disabled.

toolTipShowTime

Duration of Tooltip animation in ms

folioSlideTime

Duration of "change folio item" animation in ms

animateBackground

It can be **true** or **false**. If **true**, then the background image will have parallax animation. It will follow the mouse cursor.

animateBottom

It can be **true** or **false**. If **true**, then the bottom modules will have parallax animation. They will follow the mouse cursor.

windowColor

Default color scheme for windows. It could be **"black"**, **"white"** or **"grey"**

defaultWindowWidth

Default width for windows in px, if it is not specified in the link

contentWindowToolbar

Default toolbar type for the window with HTML Content/ iFrame. It could be **"fancy"**, **"ribbon"** or **"os"**

imageWindowToolbar

Default toolbar type for the window with Image layout. It could be **"fancy"**, **"ribbon"** or **"os"**

withScrollBar

It can be **true** or **false**. If **true**, then every window with HTML content will have its own scroll bar.

openWindowTime

Duration of the “Open window” animation in ms

minimizeWindowTime

Duration of the “Minimize window” animation in ms

expandWindowTime

Duration of the “Expand window” animation in ms

rotateWindows

It can be **true** or **false**. If **true**, then every window will be opened with additional rotate animation. Not recommended, could work very slow.

windowFromLink

It can be **true** or **false**. If **true**, then the window will appear from the clicked link. If **false**, then new window will appear from the left top corner of screen.

replaceFonts

List of the selectors of elements for which will be executed font replacement.

noFadeInIE6_8

It can be **true** or **false**. If **true**, then some fade effects (mostly for dashboard icons, portfolio and windows) will be disabled in Internet Explorer 6,7 and 8 browsers.

showIntro

It can be **true** or **false**. If **true**, then the intro section will be enabled on the site load.

introSlideDuration

Default duration for each intro slide animation in ms. If not specified in slide div.

introStartTransform

CSS3 transform rule for the intro slide in the beginning of its animation. Slide's start position.

introFinalTransform

CSS3 transform rule for the intro slide in the end of its animation. Slide's final position.

6. HTML Structure

As mentioned above every Theme has its own index file. HTML content of Fancy and Moonlight themes is almost the same. So let's look at HTML structure of Fancy theme

6.1 Fancy Theme HTML Structure

Let's look at the main HTML structure of the Sky Line Fancy theme. Open index-fancy.php file with a text editor (Highly recommended to use Adobe® Dreamweaver® or Notepad ++ editors). **Index-fancy.php** structure:

```
1 <!DOCTYPE HTML>
2 <html>
3 <head>
4 <meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
5 <link rel="stylesheet" type="text/css" href="css/skyline-fancy.css" />
6 <link rel="stylesheet" type="text/css" href="css/ui-lightness/jquery-ui-1.8.11.custom.css" />
7 <script type="text/javascript" src="scripts/jquery-1.5.2.min.js"></script>
8 <script type="text/javascript" src="scripts/jquery-ui-1.8.11.custom.min.js"></script>
9 <script type="text/javascript" src="scripts/idangerous.zoomslider.js"></script>
10 <script type="text/javascript" src="scripts/cufon-yui.js"></script>
11 <script type="text/javascript" src="scripts/Myriad_Pro_400-Myriad_Pro_600.font.js"></script>
12 <script type="text/javascript" src="scripts/skyline-fancy.js"></script>
13 <script type="text/javascript" src="scripts/skyline-fancy.settings.js"></script>
14 <!--[if IE 7]>
15 <link rel="stylesheet" type="text/css" href="css/ie7.css" />
16 <![endif]-->
17 <title>Sky Line - Premium WebSite Template by iDangerous</title>
18 </head>
19 <body class="white">
20 <div id="background"></div>
21 <div class="ajax-loader">  Loading... </div>
23 <div id="wrapper">
24   <div class="content-section">
25     <div id="toolbar">
26       <div class="toolbar2">
27         <?php include("includes/toolbar-fancy.php"); ?>
28       </div>
29     </div>
30     <div id="portfolio" style="display:none">
31       <div class="folio-left">
32         <div class="folio-home toHome"></div>
33         <div class="folio-prev"></div>
34       </div>
35       <div class="folio-right">
36         <div class="folio-next"></div>
37       </div>
38       <div class="folio-wrap">
39         <div class="folio-wrapper">
40           <?php include("includes/portfolio.php"); ?>
41         </div>
42         <div class="clear"></div>
43       </div>
44     </div>
45     <div id="slider" style="display:none">
46       <div class="slider-control">
47         <div class="slide-prev"></div>
48         <div class="toHome"></div>
49         <div class="slide-next"></div>
50       </div>
51       <div class="slider">
52         <?php include("includes/slider.php"); ?>
53       </div>
54     </div>
```

CSS and JavaScript files attachment

CSS style sheet file used for IE7 browser only

Site Title

Ajax Loader

Content section contains toolbar(dashboard), portfolio and slider contents

HTML content of the toolbar is in the **includes/toolbar-fancy.php** file

Portfolio section

Portfolio controllers

HTML content of the Portfolio is in the **includes/portfolio.php** file

Slider section

Slider controllers

HTML content of the Slider is in the **includes/slider.php** file

Bottom content section contains the bottom modules, social icons and footer

HTML content of the Modules is in the **includes/modules.php** file

Footer

```
55 </div>
56 <div id="bottom-content">
57     <div class="bottom-pane"></div>
58     <div class="modules">
59         <?php include("includes/modules.php"); ?>
60     <div class="clear"></div>
61 </div>
62 <div id="footer"> &copy; 2011 &quot;Sky Line&quot; Premium Template by iDangero.us. All Rights
Reserved </div>
63 <div id="social">
64     <a class="hasTip" title="Twitter" href="#"></a>
65     <a class="hasTip" title="Facebook" href="#"></a>
66     <a class="hasTip" title="Blogger" href="#"></a>
67     <a class="hasTip" title="Flickr" href="#"></a>
68     <a class="hasTip" title="Myspace" href="#"></a>
69     <a class="hasTip" title="LinkedIn" href="#"></a>
70     <a class="hasTip" title="YouTube" href="#"></a>
71     <a class="hasTip" title="DIGG" href="#"></a>
72     <a class="hasTip" title="Delicio.us" href="#">
</a>
73 </div>
74 </div>
75 </div>
76 <div id="windows"></div>
77 <div id="intro">
78     <div class="intro-layer"></div>
79     <div class="intro-slides">
80         <div class="intro-control">
81             <div>
82                 <p class="cufoned"><a class="button" id="intro-start" href="#">Watch Intro</a></p>
83                 <p class="cufoned">... and learn more about SkyLine features!</p>
84                 <p class="cufoned">or</p>
85                 <p class="cufoned"><a class="button" id="intro-skip" href="#">Skip Intro</a></p>
86             </div>
87         </div>
88         <?php include("includes/intro.php"); ?>
89     </div>
90 </div>
91 <div id="tooltip"></div>
92 <div id="slide-loader">
93     <div class="dummy-blocks">
94         <div class="dummy-first"></div>
95         <div class="dummy-last"></div>
96     </div>
97 </div>
98 </body>
99 </html>
```

All windows will be loaded here – in the div with a "windows" id attribute

Social icons

Intro Section

Intro Layer with a full size intro background

Layer with a content before Intro where you can skip it or watch it.

HTML content of the Intro is in the **includes/intro.php** file

Animated tooltip container. Tooltip text will be placed here

These container are used for zoom slider

6.2 Toolbar (Dashboard)

HTML content of the Toolbar for Fancy theme is in the **includes/toolbar-fancy.php**. Let's look on it:

Every icons row contains four toolbar icons

Toolbar icon with link

```
1 <div class="icons-row">
2   <div class="toolbar-icon">
3     <a class="new-window" href="content/about.php" rel="700"><strong class="color1">About</strong>
Skyline</a>
4   </div>
5   <div class="toolbar-icon">
6     <a class="new-window" href="content/features.php" rel="800" rev="700">Skyline <strong class="color1"
>Features</strong></a>
7   </div>
8   <div class="toolbar-icon">
9     <a class="toSlider" href="#">Checkout Awesome <span class="color1" style="font-weight:bold">
ZoomSlider</span></a>
10  </div>
11  <div class="toolbar-icon">
12    <a class="toFolio" href="#">Amazing Carousel <span class="color1" style="font-weight:bold">Portfolio
</span></a>
13  </div>
14 </div>
15 <div class="icons-row">
16   <div class="toolbar-icon">
17     <a href="content/windows.php" class="new-window">Skyline <strong class="color1">Windows</strong></a>
18   </div>
19   <div class="toolbar-icon">
20     <a rel="800" rev="600" class="iframe new-window" href="http://google.com"><strong class="color1">
iFrame</strong> Demo</a>
21   </div>
22   <div class="toolbar-icon">
23     <a class="new-window" href="content/typography.php">Skyline <strong class="color1">Typography</
strong></a>
24   </div>
25   <div class="toolbar-icon">
26     <a class="new-window" href="content/themes.php">Skyline <strong class="color1">Themes</strong></a>
27   </div>
28 </div>
29 <div class="icons-row">
30   <div class="toolbar-icon">
31     <a class="new-window" href="content/contacts.php">Ajax<br/><span class="color1">Contact<br/>Form</span
></a>
32   </div>
33   <div class="toolbar-icon">
34     <a class="new-window withImg color1" href="images/demo/demo3.jpg" title="Photo 2">Photo 1</a>
35   </div>
36   <div class="toolbar-icon">
37     <a class="new-window withImg color1" href="images/demo/demo9.jpg" title="Photo 2">Photo 2</a>
38   </div>
39   <div class="toolbar-icon">
40     <a class="showIntro" href="#">Skyline<br/><strong class="color1">Intro</strong></a>
41   </div>
42 </div>
```

As you can see it's very easy to create your own toolbar icon or to change links in the existing ones. To create new toolbar icon use the following formatting:

```


<div class="icons-row">
  <div class="toolbar-icon">
    ---- Icon Content - Link with text, or with image, or any HTML content ----
  </div>
  <div class="toolbar-icon">
    ---- Icon Content - Link with text, or with image, or any HTML content ----
  </div>
  <div class="toolbar-icon">
    ---- Icon Content - Link with text, or with image, or any HTML content ----
  </div>
  <div class="toolbar-icon">
    ---- Icon Content - Link with text, or with image, or any HTML content ----
  </div>
</div>

```

Please notice, that reflection image will be added automatically by JavaScript for every icon in last row.

6.3 Zoom Slider & Its Configuration

Slider's HTML content is located in the **includes/slider.php** file:

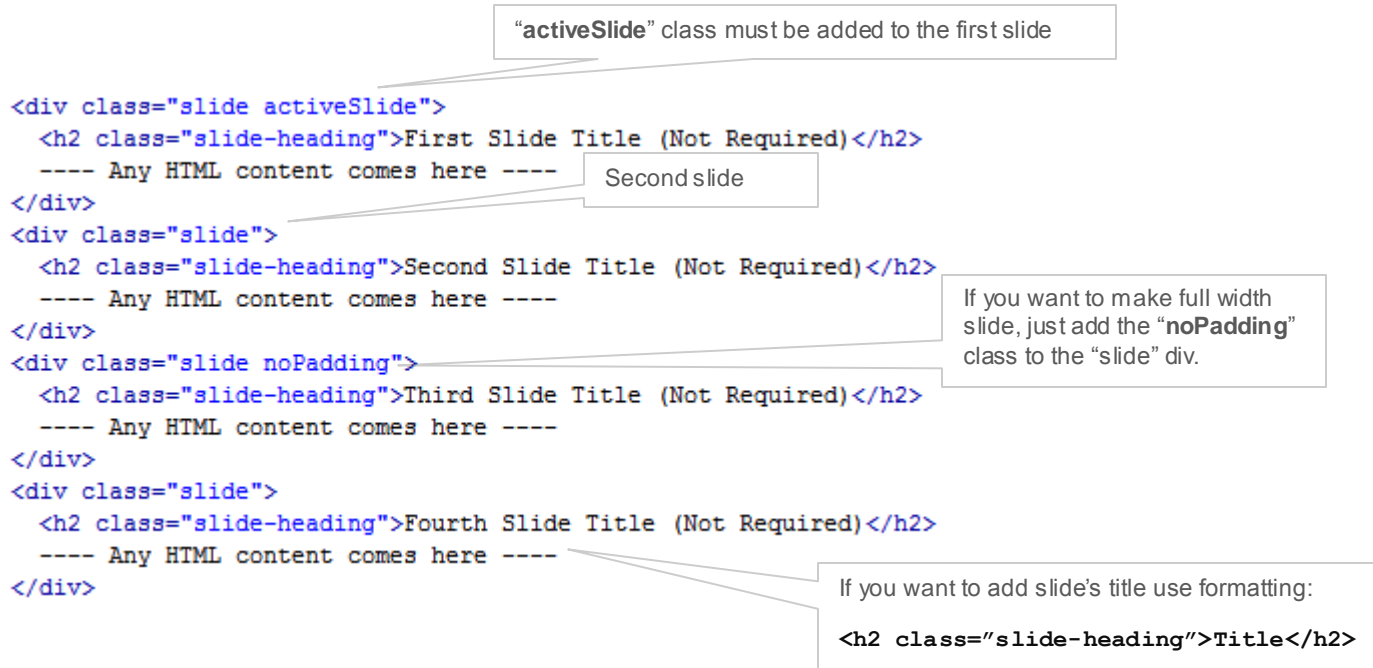

```

<div class="slide activeSlide">
  <h2 class="slide-heading">First Slide Title (Not Required)</h2>
  ---- Any HTML content comes here ----
</div>
<div class="slide">
  <h2 class="slide-heading">Second Slide Title (Not Required)</h2>
  ---- Any HTML content comes here ----
</div>
<div class="slide noPadding">
  <h2 class="slide-heading">Third Slide Title (Not Required)</h2>
  ---- Any HTML content comes here ----
</div>
<div class="slide">
  <h2 class="slide-heading">Fourth Slide Title (Not Required)</h2>
  ---- Any HTML content comes here ----
</div>

```

"activeSlide" class must be added to the first slide

Second slide

If you want to make full width slide, just add the "noPadding" class to the "slide" div.

If you want to add slide's title use formatting:

```
<h2 class="slide-heading">Title</h2>
```

As you can see it's not too difficult to create new slides. All you need is to add DIV block with a "slide" class and to put any HTML content inside of it.

Now let's see how to configure Zoom Slider. Its settings are in the Theme configuration file:

```

sliderParams = {
  loader : "#slide-loader",
  slide : ".slide",
  nextTrigger : ".slide-next",
  prevTrigger : ".slide-prev",
  offsetX1 : "0",
  offsetX2 : "0",
  offsetY : "-20",
  rotateAngle1 : "0",
  rotateAngle2 : "0",
  scale : 1.2,
  animationTime : 1500
}


```



```

sliderParams = {
  loader : "#slide-loader",
  slide : ".slide",
  nextTrigger : ".slide-next",
  prevTrigger : ".slide-prev",
  offsetX1 : "50",
  offsetX2 : "-50",
  offsetY : "-20",
  rotateAngle1 : "15",
  rotateAngle2 : "-15",
  scale : 1.2,
  animationTime : 1500
}

```

Let's look at the image to know what these variables means:

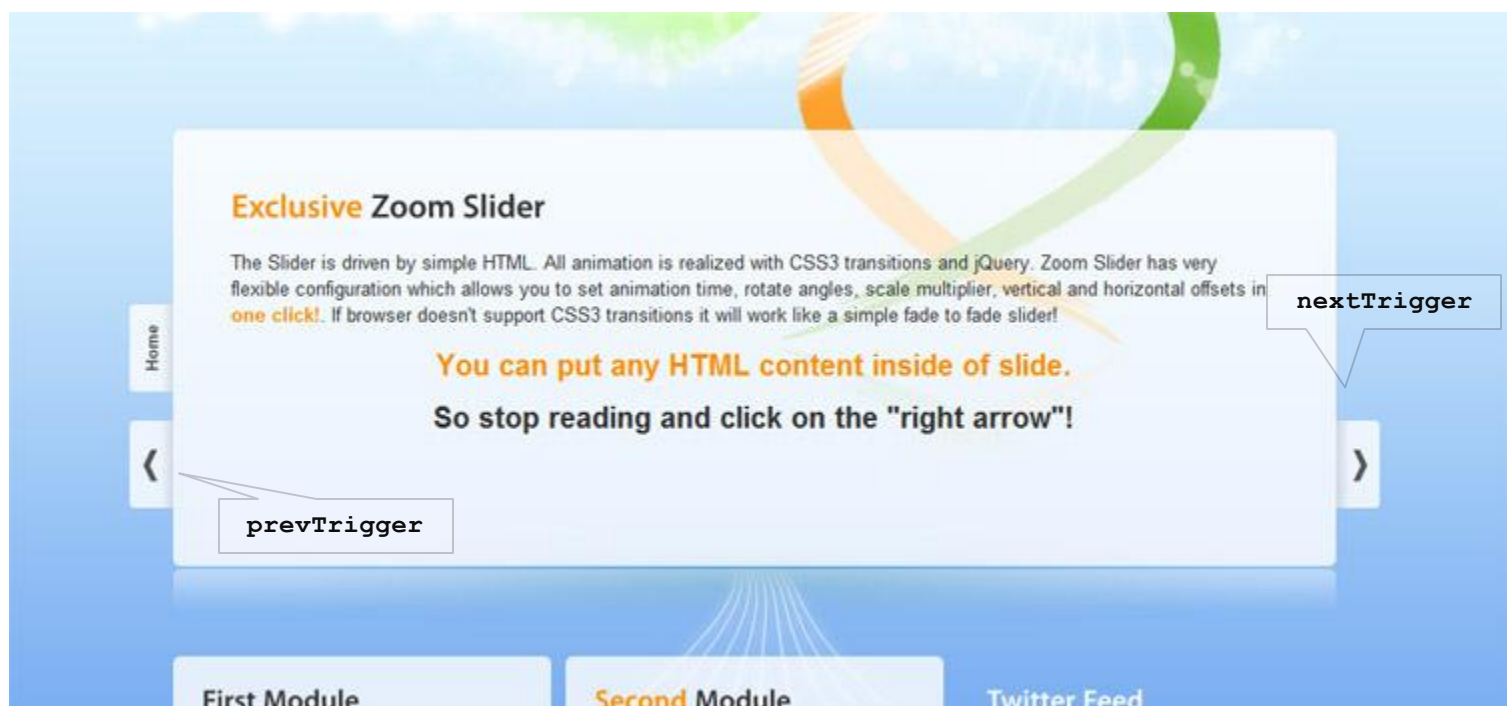

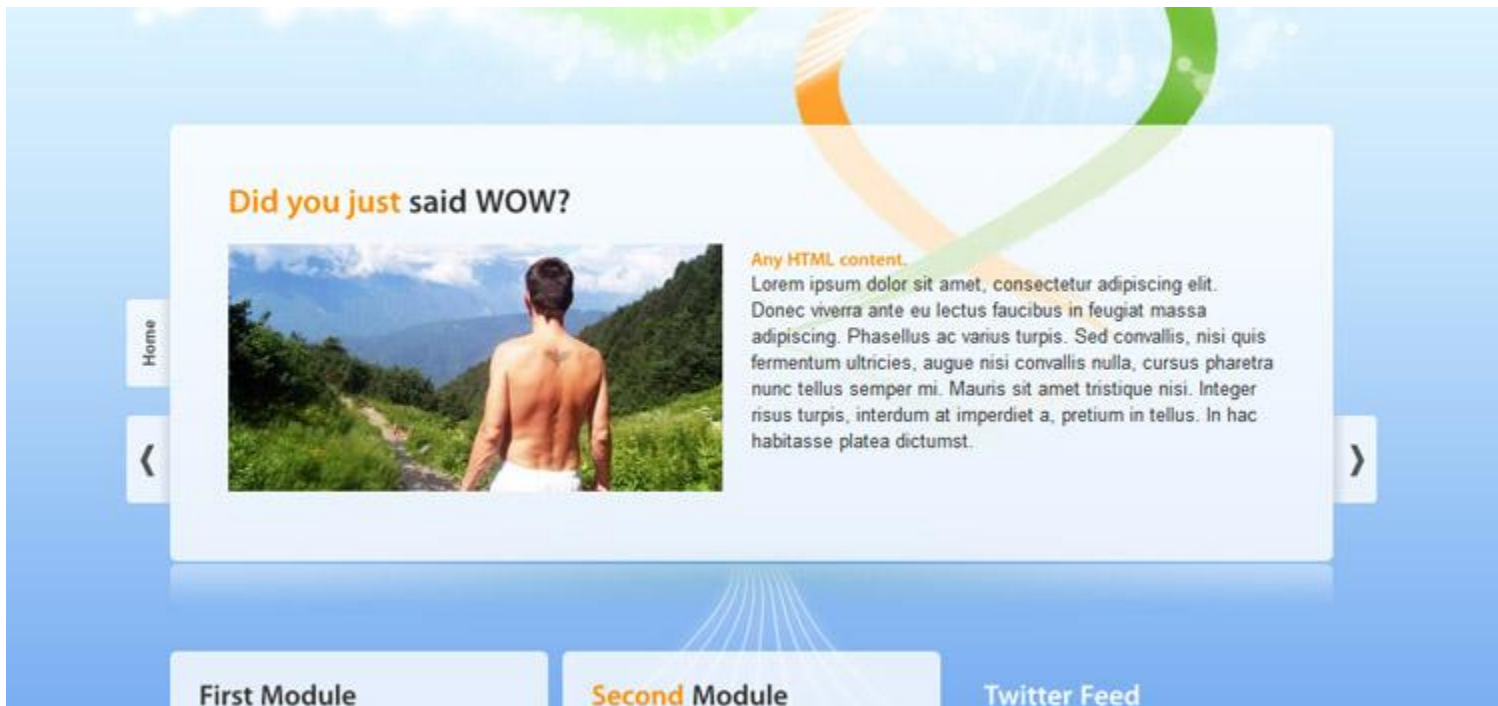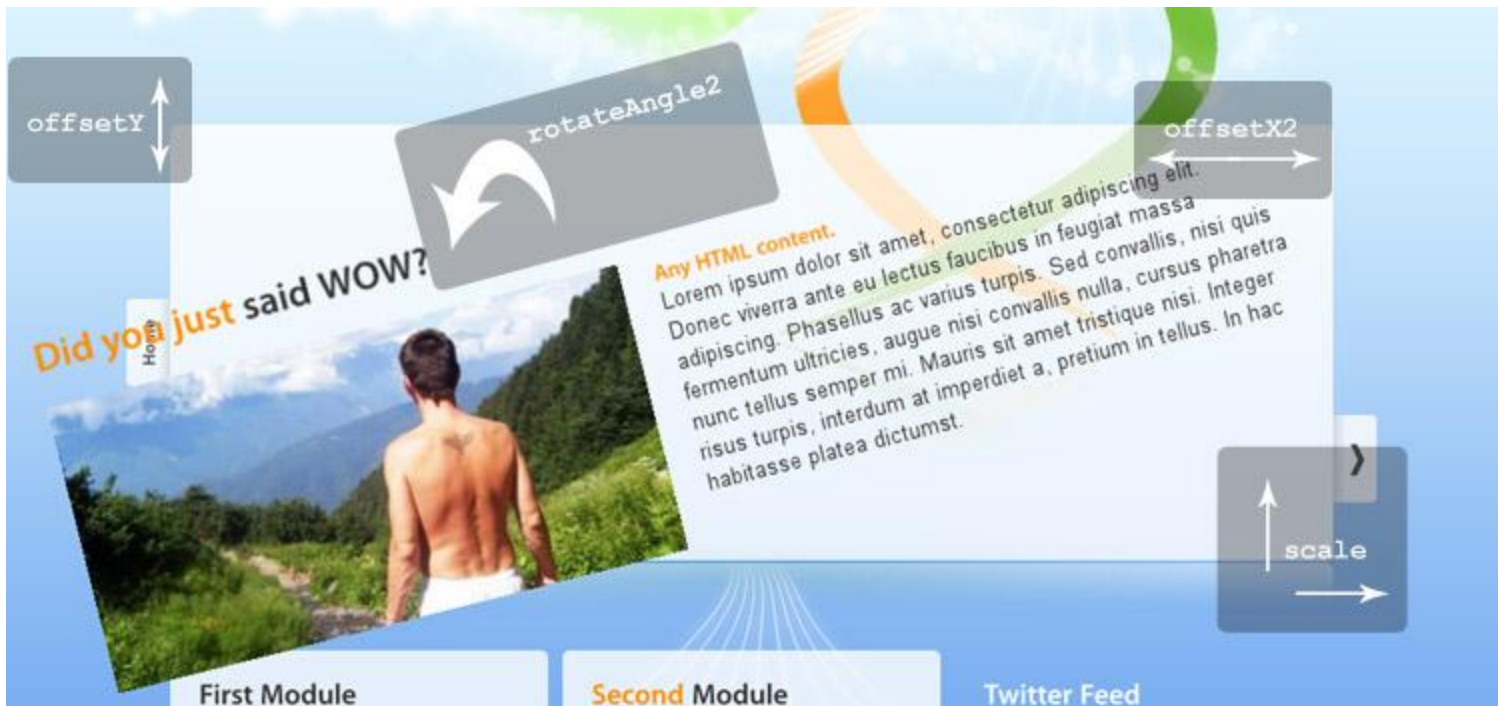

6.4 Portfolio Section

Portfolio' HTML content is in the **includes/portfolio.php** file:

First Portfolio item

```

<div class="folio-item" >
  <h3 class="folio-title">First Item Title</h3>
  ---- Any HTML content comes here ----
  <div class="folio-reflect"></div>
</div>
<div class="folio-item" >
  <h3 class="folio-title">Second Item Title</h3>
  ---- Any HTML content comes here ----
  <div class="folio-reflect"></div>
</div>
<div class="folio-item" >
  <h3 class="folio-title">Third Item Title</h3>
  ---- Any HTML content comes here ----
  <div class="folio-reflect"></div>
</div>

```

Layer with a reflection image

Third Portfolio item

If you want to add item's title use formatting:

```
<h3 class="folio-title">Title</h3>
```

It's very easy to create new portfolio items. All you need is to add DIV block with a "folio-item" class and to put any HTML content inside of it.

6.5 Intro Section

Intro' HTML content is located in the **includes/intro.php** file:

First Intro slide

```

<div class="intro-slide time(5000)">
  <h1 class="intro-heading">Intro slide title</h1>
  ---- Any HTML content here ----
</div>
<div class="intro-slide time(10000)">
  <h1 class="intro-heading">Intro slide title</h1>
  ---- Any HTML content here ----
</div>
<div class="intro-slide time(600)">
  <h1 class="intro-heading">Intro slide title</h1>
  ---- Any HTML content here ----
</div>
<div class="intro-slide">
  <h1 class="intro-heading">Intro slide title</h1>
  ---- Any HTML content here ----
</div>

```

Custom animation duration for the intro slide in ms. If it is not specified then this value will be equal to the **introSlideDuration** variable from the settings file

If you want to add slide's title use formatting:

```
<h1 class="intro-heading">Title</h1>
```

To create your own intro slide all you need is to create DIV block with an "intro-slide" class and to put any HTML content inside of it. If you want to set custom animation duration for some slide, you'll need to add additional "time()" class to the "intro-slide" div. For example if you want to make slide duration equal to 20 seconds use the following formatting:

```
<div class="intro-slide time(20000)"> ---- Slide Content --- </div>
```

20000ms = 20

6.6 Bottom Modules

Bottom Modules' content is in the **includes/modules.php** file:

```
<div class="module first">
  <div class="module-reflect"></div>
  <h3 class="module-title">First Module</h3>
  ---- Any HTML content ----
</div>
<div class="module">
  <div class="module-reflect"></div>
  <h3 class="module-title">Second Module</h3>
  ---- Any HTML content ----
</div>
<div class="module last noBG">
  <div class="module-shadow"></div>
  <h3 class="module-title">Twitter Feed</h3>
  <ul id="tweets"></ul>
</div>
```

First Module. You'll need to specify the "first" class for the first module

"module-reflect" contains the module's reflection image

If you want to add module's title use formatting:
`<h3 class="module-title">Title</h3>`

Additional "noBG" class means that this module is without background

Use "module-shadow" class instead of "module-reflect" for the modules without background

Twitter timeline will be inserted here

6.7 Twitter Feed

Let's return to the Sky Line settings file for the Fancy theme to configure your Twitter Feed:

```
twitter : {
  container : "#tweets",
  username : "nolimits4web",
  numberOfTweets : 1,
  tweetFormat : '<li class="single-tweet">'
    + '<p class="tweet-text">'
    + '<a class="twUname" href="http://twitter.com/%username">@%username</a>: '
    + '%tweetText'
    + '</p>'
    + '<p class="tweet-date">on %tweetDate</p>'
    + '</li>'
}
```

container

Container for the Twitter feed. In this case this is the element with a "tweets" id attribute. By the default it is located in the right bottom module - `<ul id="tweets">`

username

Your Twitter Username here.

numberOfTweets

Number of your recent tweets (including re-tweets) to display

tweetFormat

HTML format to display every tweet. If you want to use your own tweet formatting feel free to edit default format.

You can use the following replaceable variables : **%username** - will be replaced with your username

%tweetDate – will be replaced with Tweet date

%tweetText – will be replaced with Tweet text

6.8 O.S Theme HTML Structure

O.S Theme HTML structure is in the **index-os.php** file:

```
1 <!DOCTYPE HTML>
2 <html>
3 <head>
4 <meta http-equiv="Content-Type" content="text/html; charset=utf-8" />
5 <link rel="stylesheet" type="text/css" href="css/skyline-os.css" />
6 <link rel="stylesheet" type="text/css" href="css/ui-lightness/jquery-ui-1.8.11.custom.css" />
7 <script type="text/javascript" src="scripts/jquery-1.5.2.min.js"></script>
8 <script type="text/javascript" src="scripts/jquery-ui-1.8.11.custom.min.js"></script>
9 <script type="text/javascript" src="scripts/cufon-yui.js"></script>
10 <script type="text/javascript" src="scripts/Myriad_Pro_400-Myriad_Pro_600.font.js"></script>
11 <script type="text/javascript" src="scripts/skyline-os.js"></script>
12 <script type="text/javascript" src="scripts/skyline-os.settings.js"></script>
13 <!--[if IE 7]>
14 <link rel="stylesheet" type="text/css" href="css/ie7.css" />
15 <![endif]>
16 <title>Sky Line - Premium WebSite Template by iDangerous</title>
17 </head>
18 <body>
19 <div class="ajax-loader">  Loading... </div>
21 <div class="wrapper">
22   <div class="wrapper2">
23     <div class="bottom-pane"></div>
24     <div id="toolbar">
25       <?php include("includes/toolbar-os.php"); ?>
26     </div>
27     <div id="footer"> &copy; 2011 &quot;Sky Line&quot; Premium Template by iDangero.us. All Rights
28 Reserved </div>
29     <div id="social">
30       <a class="hasTip" title="Twitter" href="#"></a>
31       <a class="hasTip" title="Facebook" href="#"></a>
32       <a class="hasTip" title="Blogger" href="#"></a>
33       <a class="hasTip" title="Flickr" href="#"></a>
34       <a class="hasTip" title="Myspace" href="#"></a>
35       <a class="hasTip" title="LinkedIn" href="#"></a>
36       <a class="hasTip" title="YouTube" href="#"></a>
37       <a class="hasTip" title="Digg" href="#"></a>
38       <a class="hasTip" title="Delicio.us" href="#">
39     </a>
40   </div>
41 </div>
42 <div id="windows"></div>
```

CSS and JavaScript files attachment

CSS style sheet file used for IE7 browser only

Site Title

Ajax Loader

Bottom pane section contains the toolbar icons, social icons and footer

HTML content of the toolbar is in the includes/toolbar-os.php file

Footer

Social icons

All windows will be loaded here – in the div with a "windows" id attribute

```

42 <div id="intro">
43   <div class="intro-layer"></div>
44   <div class="intro-slides">
45     <div class="intro-control">
46       <div>
47         <p class="cufoned"><a class="button" id="intro-start" href="#">Watch Intro</a></p>
48         <p class="cufoned">... and learn more about SkyLine features!</p>
49         <p class="cufoned">or</p>
50         <p class="cufoned"><a class="button" id="intro-skip" href="#">Skip Intro</a></p>
51       </div>
52     </div>
53     <?php include("includes/intro.php"); ?>
54   </div>
55 </div>
56 <div id="tooltip"></div>
57 </body>
58 </html>

```

Intro Section

Intro Layer with a full size intro background

Layer with a content before Intro where you can skip it or watch it.

HTML content of the Intro is in the includes/intro.php file

Animated tooltip container. Tooltip text will be placed here

6.9 O.S Theme Toolbar (Dashboard)

Let's open **includes/toolbar-os.php** file:

```

<div class="icons-row">
  <div class="t-icon" style="margin-left:0px">
    <div class="icon-reflect" ></div>
    <div class="toolbar-icon">
      ---- Toolbar link with text, image, or Custom HTML content ----
    </div>
  </div>
  <div class="t-icon">
    <div class="icon-reflect" ></div>
    <div class="toolbar-icon">
      ---- Toolbar link with text, image, or Custom HTML content ----
    </div>
  </div>
  <div class="t-icon">
    <div class="icon-reflect" ></div>
    <div class="toolbar-icon">
      ---- Toolbar link with text, image, or Custom HTML content ----
    </div>
  </div>
  <div class="t-icon" style="margin-right:0px">
    <div class="icon-reflect" ></div>
    <div class="toolbar-icon">
      ---- Toolbar link with text, image, or Custom HTML content ----
    </div>
  </div>
</div>

```

Icons row with toolbar icons

"margin-left" must be equal to "0" for the first icon

Layer with reflection image

Toolbar icon with link

"margin-right" must be equal to "0" for the last icon

7. Tooltips

It's very easy to use animated popup tooltips. To add popup tooltip for any element you need to add "title" attribute for it with a tip text and to add a "hasTip" class for this element. For example:

```
<a href="some-link.html" class="hasTip" title="Some link to some page">
  Link Text
</a>
```

8. Work With Windows

So let's see how to open new windows with desired content and required parameters.

Window with HTML content

To open such window all you need is to specify additional "**new-window**" class for the link and to specify file (with HTML content) location.

Example 1. We want to open new window with HTML content from the **content/about.php** file directly from the simple link in the text. We should use the following formatting:

```
<a href="content/about.php" class="new-window">About</a>
```

Location of the file with HTML content

When we'll specify a "**new-window**" class, the script will load file content with Ajax into the new window

In this case new window will have width equal to the **defaultWindowWidth** variable from the template configuration file. And window will have toolbar style specified in **contentWindowToolbar** variable.

Example 2. We want to open new window with HTML content from the **content/features.php** file directly from the simple link in the text. And we need to specify size of new window. We should use the following formatting:

```
<a href="content/features.php" class="new-window" rel="800" rev="600">Features</a>
```

Location of the file with HTML content

Width of new window. Must be specified in **REL** attribute.

Height of new window. Must be specified in **REV** attribute.

After that new window will be opened with required width and height

Window with iFrame

To open such a window all you need is to specify additional “new-window” and “iframe” classes for the link and to specify iFrame URL.

Example. We want to open new window with iFramed Google.com inside directly from the simple link in the text. We should use the following formatting:

```
<a href="http://www.google.com" class="new-window iframe">Google</a>
```

iFrame URL

Additional “**iframe**” class will tell to JavaScript to open new window with iFrame inside

It also possible to specify window width and height like in **Example 2** above using **REL** and **REV** attributes

iFrame windows will have toolbar style specified in **contentWindowToolbar** variable.

Window with Image layout

To open window with Image (or Photo) inside all you need is to specify additional “**new-window**” and “**withImg**” classes for the link and to specify image URL.

Example. We want to open new window with image inside directly from the simple link in the text. We should use the following formatting:

```
<a href="images/my_image.jpg" title="It is me" class="new-window withImg">My Photo</a>
```

image URL

You can specify additional image title. It will be show in the bottom of window.

Additional “**withImg**” class will tell to JavaScript to open new window with image inside


iFrame windows will have toolbar style specified in **imageWindowToolbar** variable.

How to control Window color and Toolbar style


Sky Line API allows you to open new window with background color and toolbar style different from the **windowColor** and **contentWindowToolbar** (or **imageWindowToolbar**) variables specified in template configuration file.

All Sky Line themes come with three background colors (black, white or grey) and three toolbar styles (ribbon, os and fancy):


Fancy Toolbar:

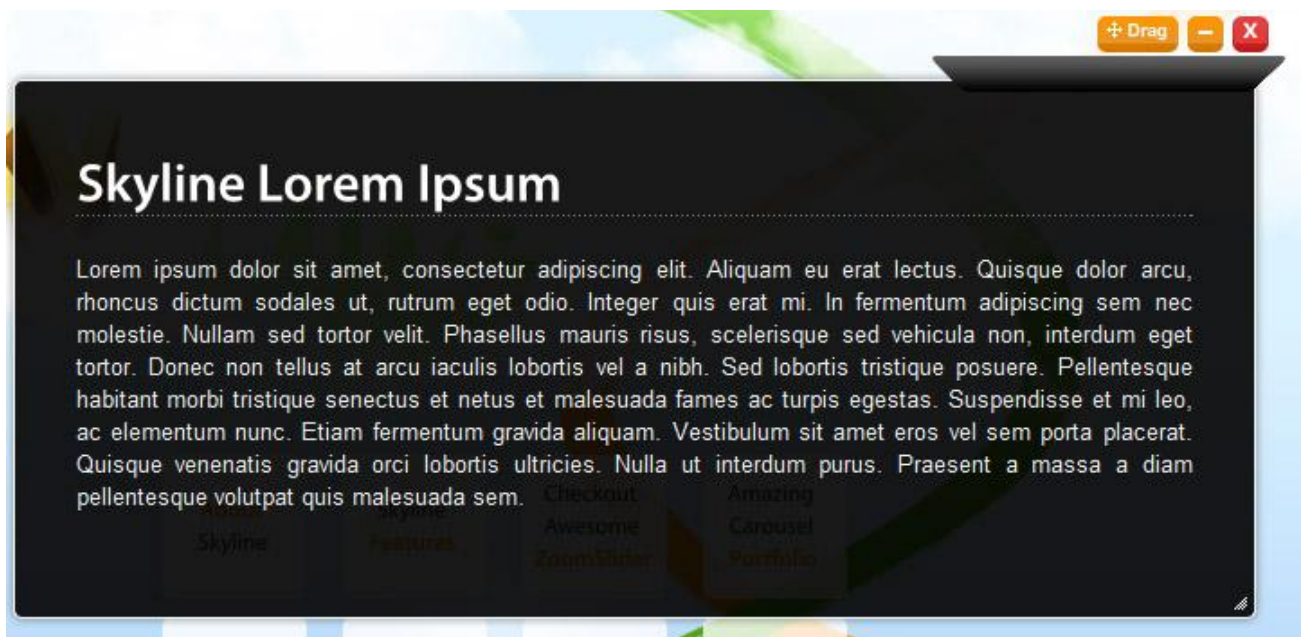

OS Toolbar:

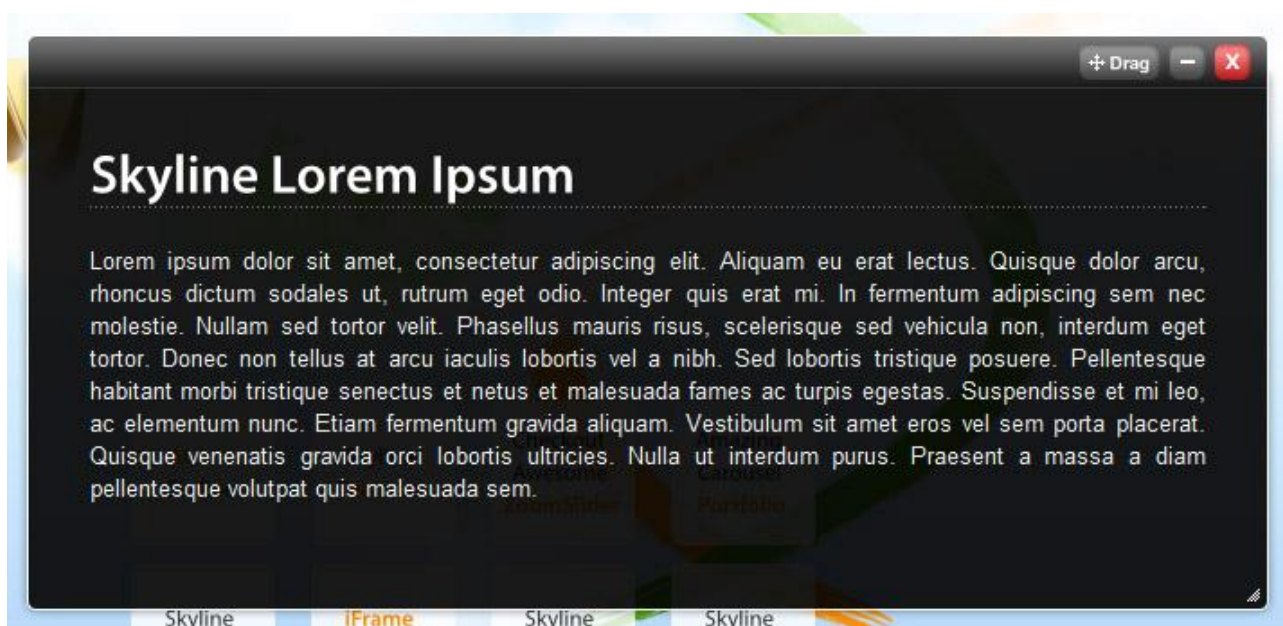

Ribbon Toolbar:

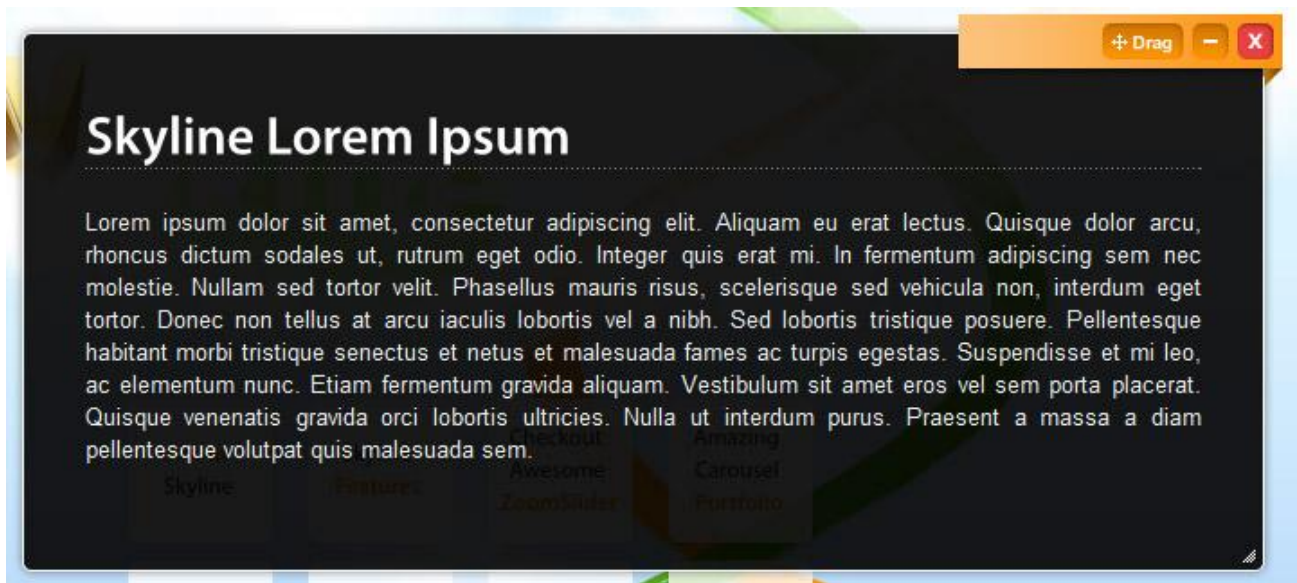

So to open new window with a required background color and toolbar you need to add additional **set(windowBGColor, toolbarStyle)** class for the “new window” link:

```
---- White window bakcground color ----
New window with white BG color and Fancy toolbar:
<a href="myfile.html" class="new-window set(white,fancy)">My Window</a>
New window with white BG color and OS toolbar:
<a href="myfile.html" class="new-window set(white,os)">My Window</a>
New window with white BG color and Ribbon toolbar:
<a href="myfile.html" class="new-window set(white,ribbon)">My Window</a>

---- Black window bakcground color ----
New window with black BG color and Fancy toolbar:
<a href="myfile.html" class="new-window set(black,fancy)">My Window</a>
New window with black BG color and OS toolbar:
<a href="myfile.html" class="new-window set(black,os)">My Window</a>
New window with black BG color and Ribbon toolbar:
<a href="myfile.html" class="new-window set(black,ribbon)">My Window</a>

---- Grey window bakcground color ----
New window with grey BG color and Fancy toolbar:
<a href="myfile.html" class="new-window set(grey,fancy)">My Window</a>
New window with grey BG color and OS toolbar:
<a href="myfile.html" class="new-window set(grey,os)">My Window</a>
New window with grey BG color and Ribbon toolbar:
<a href="myfile.html" class="new-window set(grey,ribbon)">My Window</a>
```

Opening Window

Sky Line API allows you to open new window in three ways:

1. New content could be opened in new window

2. New content could be opened in new window and window with clicked link will close
3. New content could be opened in window with clicked link

To use the first way all you need is to use link in examples above.

To use the second way you need to specify an additional “**closeWindow**” class for the “**new-window**” link like this:

```
<a href="content/about.php" class="new-window closeWindow">About</a>
```

After you click such a link, new window will be opened and window with this link will be closed.

To use the third way you need to specify an additional “**openHere**” class for the “**new-window**” link like this:

```
<a href="content/about.php" class="new-window openHere">About</a>
```

For this case you can specify width and height with REL (for width) and REV (for height) attributes:

```
<a href="content/about.php" rel="800" rev="600" class="new-window openHere">About</a>
```

But now to make it works correctly, both attributes must be specified!

Third way will not work if you'll try to open window with image or iFrame layout. Only for HTML content from window with HTML content layout!

9. Windows HTML Structure

Window with HTML Content and iFrame

These two main layout templates are located in the **window.tmpl.php** file located in the root folder of website.

All these variables will be posted by JavaScript

We need an opportunity open window with a desired width

We need to use unique ID attribute for every window to make it unique.

Window container

Window's toolbar with minimize (expand) and close buttons

"w-ml" is a middle window container. It contains some style divs and a window's content

All content will be placed inside this div

If we are opening window with HTML content, then the required file with content will be included here.

If we are opening window with iFrame content, then the iFrame will be added here with a "src" attribute equal to \$url variable


"w-bot" is a bottom window part. We need it for styling

End of window container

```
1 <?php
2 $id = $_GET['id'];
3 $url = $_GET['url'];
4 if (!empty($_GET['width'])) $width = $_GET['width'];
5 else $width = 60;
6 $contentType = $_GET['contentType'];
7 if ($contentType=="iframe") $iframe=1;
8 else $iframe = 0;
9 ?>
10 <div class="window" style="z-index:4000;width:<?php echo $width ?>px" id="window_<?php echo $id ?>">
11   <div class="w-tbl">
12     <div class="w-tbr">
13       <div class="w-tbm">
14         <div class="toolbar">
15           <div class="drag-icon" title="Drag Window" ></div>
16           <div class="minimize-icon" onclick="minimize(<?php echo $id ?>)" title="Minimize Window" ></div>
17           <div class="close-icon" onclick="closeWindow(<?php echo $id ?>)" title="Close Window" ></div>
18         </div>
19       </div>
20     </div>
21   </div>
22   <div class="w-ml">
23     <div class="w-mr">
24       <div class="w-mm">
25         <div class="w-content">
26           <?php
27             if ($iframe == 0 ) include($url) ;
28             if ($iframe == 1) { ?>
29               <iframe frameborder="0" src="<?php echo $url ?>" width="100%" height="400"></iframe>
30               <?php ?>
31             </div>
32           </div>
33         </div>
34       </div>
35     <div class="w-bot">
36       <div class="w-bl">
37         <div class="w-br">
38           <div class="w-bm"></div>
39         </div>
40       </div>
41     </div>
42   </div>
43 </div>
```

Image layout

This type of layout is used to open window with an image (or photo) inside. It has awesome image controller which allows you to rotate and scale this window.

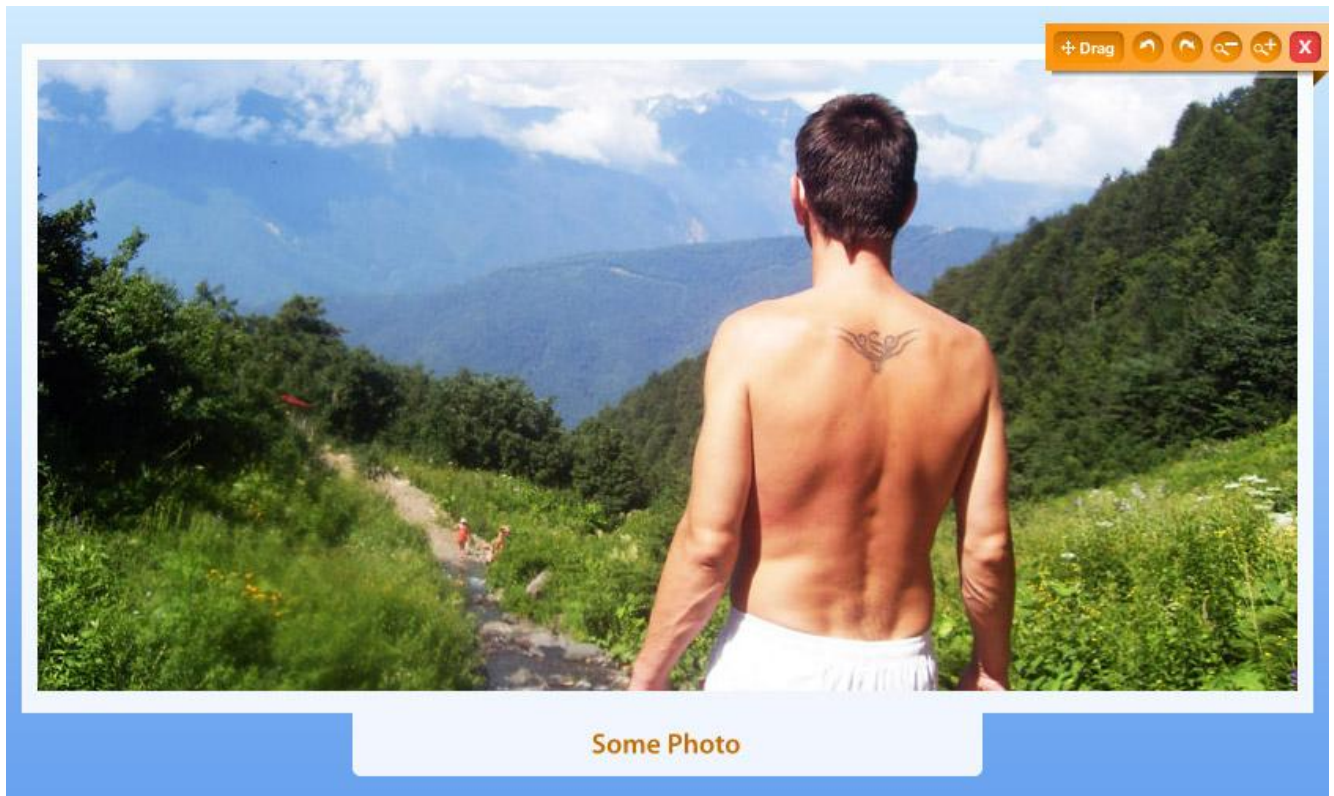

Its HTML template is located in the **img.tmpl.php** file in the root folder of website:

```
1 <?php
2 $id = $_GET['id'];
3 $url = $_GET['url'];
4 if (!empty($_GET['title'])) $title = $_GET['title'];
5 $imageSize = getimagesize($url)
6 ?>
7
8 <div class="window withImage" style="z-index:4000;width:<?php echo ($imageSize[0]+20) ?>px" id="window_
9 <?php echo $id ?>">
10   <div class="w-content">
11     <div class="toolbar">
12       <div class="drag-icon" title="Drag Window" ></div>
13       <div class="rotate-ccw-icon" onclick="rotate(-5,<?php echo $id ?>)" title="Rotate CCW" ></div>
14       <div class="rotate-cw-icon" onclick="rotate(5,<?php echo $id ?>)" title="Rotate CW" ></div>
15       <div class="zoom-out-icon" title="Zoom Out" ></div>
16       <div class="zoom-in-icon" title="Zoom In" ></div>
17       <div class="close-icon" onclick="closeWindow(<?php echo $id ?>)" title="Close Window" ></div>
18     </div>
19     " width="<?php echo
20 $imageSize[0] ?>" />
21     <?php if(!empty($title)) { ?>
22       <div class="image-title cufoned"><?php echo $title ?></div>
23     <?php } ?>
24   </div>
25 </div>
```

Window's toolbar with rotate, scale and close buttons

Requested image will be loaded here

Container with an Image title

10. Typography

Additional Myriad Pro font usage

Sky Line is powered with an awesome additional Myriad Pro font. Its usage is available due to the Cufon JavaScript library.

To use Myriad Pro font for template elements all you need is to add the “**cufoned**” class to them.

Window Headings

Let’s look at the four different window headings available in Sky Line. You should use the following formatting for them:

```
<h2 class="window-heading">Window Heading</h2>
-----
<h3 class="inner-heading">Inner Heading Bold</h3>
-----
<h3 class="inner-heading normal">Inner Heading Regular</h3>
-----
```

Window Heading

Lorem ipsum dolor sit amet, consectetur adipiscing elit. In vehicula, massa at aliquet consectetur, urna lacus ultrices neque, eu dignissim nunc justo non ipsum.

Inner Heading Bold

Lorem ipsum dolor sit amet, consectetur adipiscing elit. In vehicula, massa at aliquet consectetur, urna lacus ultrices neque, eu dignissim nunc justo non ipsum.

Inner Heading Regular

Lorem ipsum dolor sit amet, consectetur adipiscing elit. In vehicula, massa at aliquet consectetur, urna lacus ultrices neque, eu dignissim nunc justo non ipsum.

Buttons



Here is buttons HTML formatting:

```
<span class="button-l">
  <span class="button-m">
    <a class="button" href="some-link.html">Button Text</a>
  </span>
</span>
or
<span class="button-l">
  <span class="button-m">
    <span class="button">Button Text</span>
  </span>
</span>
or
<span class="button-l">
  <span class="button-m">
    <input type="submit" value="Button Text" class="button">
  </span>
</span>
```

You think it is not too easy to create new button. But! JavaScript will add these wrap spans (button-l and button-m) automatically. So all you need to use is just:

To create buttons all you need is to use the following formatting:

```
<a class="button" href="some-link.html">Button Text</a>
or
<span class="button">Button Text</span>
or
<input type="submit" value="Button Text" class="button">
```

Insets and Dropcaps

Insets and Dropcaps

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Aliquam eu erat lectus. Quisque dolor arcu, rhoncus dictum sodales ut, rutrum eget odio. Integer quis erat mi. Vestibulum sit amet eros vel sem porta placerat. Quisque venenatis gravida orci lobortis ultricies. Nulla ut interdum purus. Praesent a massa a diam pellentesque volutpat quis malesuada sem. Donec non tellus at arcu iaculis lobortis vel a nibh. Sed lobortis tristique posuere. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Suspendisse et mi leo, ac elementum nunc. Etiam fermentum gravida aliquam. Vestibulum sit amet eros vel sem porta placerat. Quisque venenatis gravida orci lobortis ultricies. Nulla ut interdum purus. Praesent a massa a diam pellentesque volutpat quis malesuada sem. Vestibulum sit amet eros vel sem porta placerat. Quisque venenatis gravida

Donec non tellus at arcu iaculis lobortis vel a nibh. Sed lobortis tristique posuere. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Suspendisse et mi leo, ac elementum nunc. Etiam fermentum gravida aliquam.

Donec non tellus at arcu iaculis lobortis vel a nibh. Sed lobortis tristique posuere. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Suspendisse et mi leo, ac elementum nunc. Etiam fermentum gravida aliquam.

orci lobortis ultricies. Nulla ut interdum purus. Praesent a massa a diam pellentesque volutpat quis malesuada sem. Donec non tellus at arcu iaculis lobortis vel a nibh. Sed lobortis tristique posuere. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Suspendisse et mi leo, ac elementum nunc. Etiam fermentum gravida aliquam. Vestibulum sit amet eros vel sem porta placerat. Quisque venenatis gravida orci lobortis ultricies. Nulla ut interdum purus. Praesent a massa a diam pellentesque volutpat quis malesuada sem. Lobortis vel a nibh. Sed lobortis tristique posuere. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Suspendisse et mi leo, ac elementum nunc. Etiam fermentum gravida aliquam. Vestibulum sit amet eros vel sem porta placerat. Quisque venenatis gravida orci lobortis ultricies. Nulla ut interdum purus. Praesent a massa a diam pellentesque volutpat quis malesuada sem.

Dropcap:

```
<p><span class="dropcap">A</span>.....</p>
```

Right Inset:

```
<p>.....<span class="inset-right">Inset Content</span> .... </p>
```

Left Inset:

```
<p>.....<span class="inset-left">Inset Content</span> .... </p>
```

11. CSS Files

There are two CSS files used in this Template. You can find css attachments in the HEAD section of the index-fancy.php (for Fancy theme) file.

```
<head>
-----
<link rel="stylesheet" type="text/css" href="css/skyline-fancy.css" />
<link rel="stylesheet" type="text/css" href="css/ui-lightness/jquery-ui-1.8.11.custom.css" />
-----
</head>
```

By default they are located in the **css/** folder. You can easily change the path or filename in the *href* attribute of *link* tag.

skyline-fancy.css file all general layouts for the Fancy them. It is separated into appropriate sections:

/* --- Common Rules --- */

Common rules, such as main backgrounds, fonts, their size, headings, links

/* --- Typography --- */

Typography styles rules.

/* --- Content Section--- */

Just one rule for content section with toolbar, portfolio and slider

/* --- Tooltip--- */

One rule for popup tooltip styling

/* --- Toolbar--- */

Style rules for toolbar and its icons

/* --- Bottom Content--- */

Rules for bottom pane

/* --- Bottom Modules--- */

Rules for bottom modules

/* --- Slider--- */

Rules for Zoom Slider

/* --- Portfolio--- */

Style rules for portfolio section

/* --- Common Windows Styling--- */

Common rules for all windows and their elements

/* --- Window With Image--- */

Specific rules for window with Image (Photo)

/* --- Fancy Toolbar--- */

Style rules for Fancy toolbar

/* --- Ribbon Toolbar--- */

Style rules for Ribbon toolbar

/* --- OS Toolbar--- */

Style rules for Os toolbar

/* --- White Window Styling--- */

Specific rules for window with a white background color

/* --- Black Window Styling--- */

Specific rules for window with a black background color

/* --- Grey Window Styling--- */

Specific rules for window with a grey background color

/* --- Forms--- */

Common rules for form elements such inputs, buttons, textarea

```
/* --- Buttons--- */
```

Style rules for buttons

```
/* --- Social Icons--- */
```

Style rules for social icons on the bottom pane

```
/* --- Footer --- */
```

Rule for footer position, size and color

```
/* --- Ajax Loader--- */
```

Rule for Ajax loader

```
/* --- Intro--- */
```

Intro section styling

```
/* --- Tweets-- */
```

Couple of rules to stylize Twitter feed


jquery-ui-1.8.11.custom.css file contain styles used for UI elements of jQuery UI library.

If you would like to edit a specific section of the site, simply find the appropriate section in the CSS file, and then scroll down until you find the appropriate style that needs to be edited.


12. PSD Files and Structure

There are the **seven** layered **.psd** files come with the **Sky Line** template. You can locate them into the **psd/** folder form the downloaded archive. Using these files you can easily redesign template. To edit these files you'll need an Adobe™ Photoshop™ (Recommended is CS4 or CS5 version)


First .psd file is the **skyline-fancy.psd**. It contains all general layouts for Fancy theme styling:

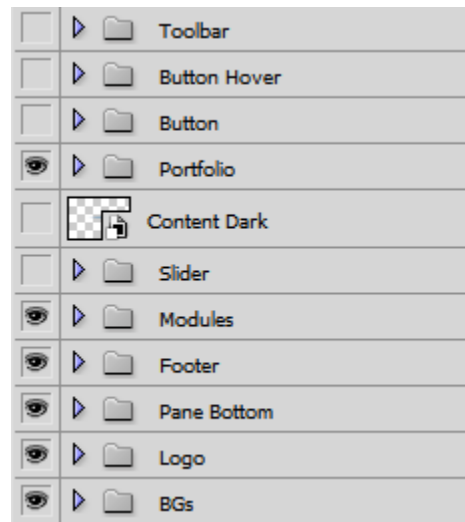

Second .psd file is the **skyline-moonlight.psd**. It contains layouts for the Moonlight theme:

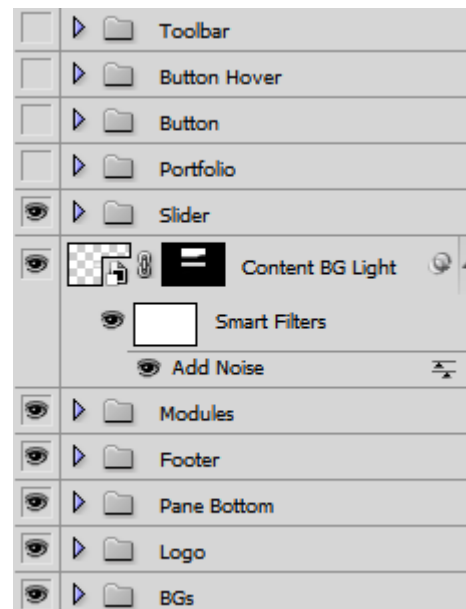

Third file is the **skyline-os.psd**. Layouts for the OS theme:

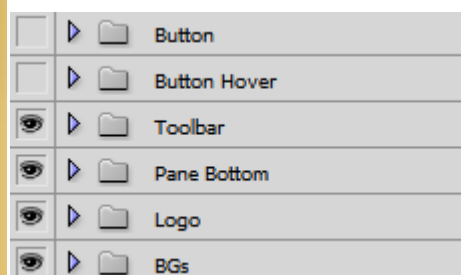


Next two files are:

- skyline-fancy-windows.psd
- skyline-moonlight-windows.psd

These files contain specific windows styling for Fancy and Moonlight themes.

Next file is the **social-bar.psd**. It contains social icons styling:

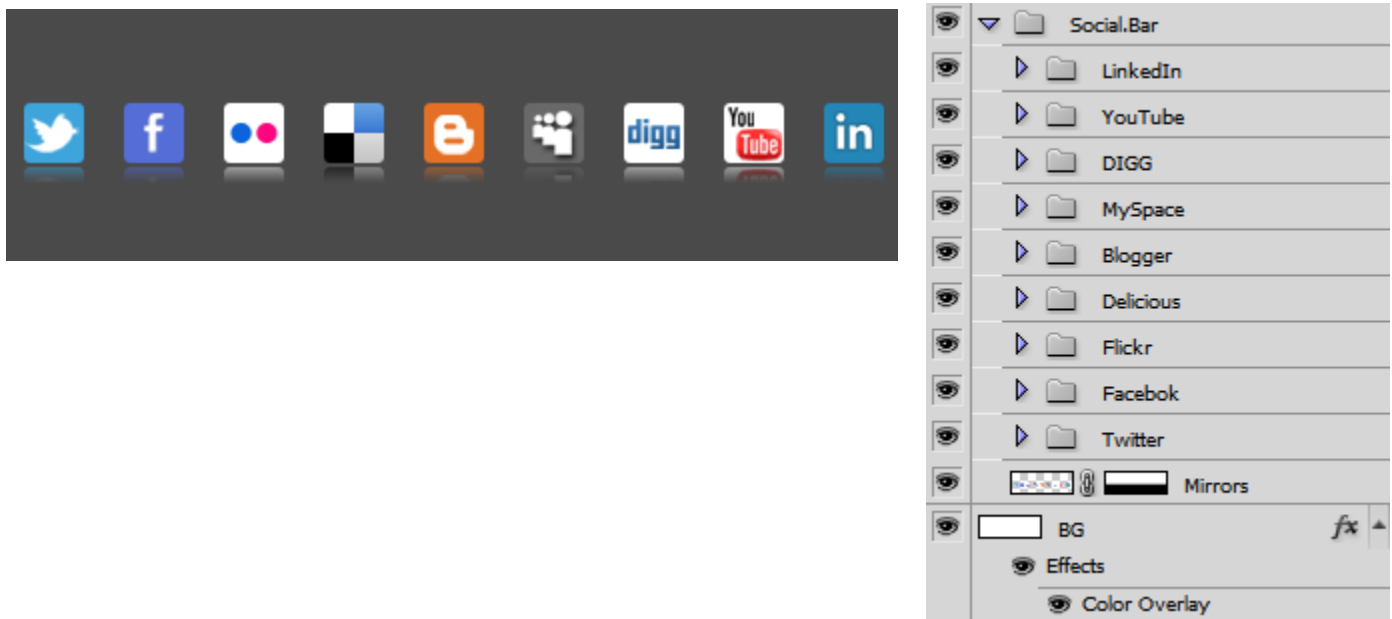

And the final **psd** file is the **ajax-loader.psd**, which will help you to redesign Ajax loader.


All layers in these file are well organized and easy to understand and redesign.

13. Customization

To customize Sky Line template you need to use included psd files and probably to make some changes in template's CSS files.

Let's for example change logo which is a part of background image.

First of all open skyline-fancy.psd file (If you decided to use this Theme). Find "Logo" layers group and expand it, than hide all layers to disable default logo. And put to this folder your own logo:

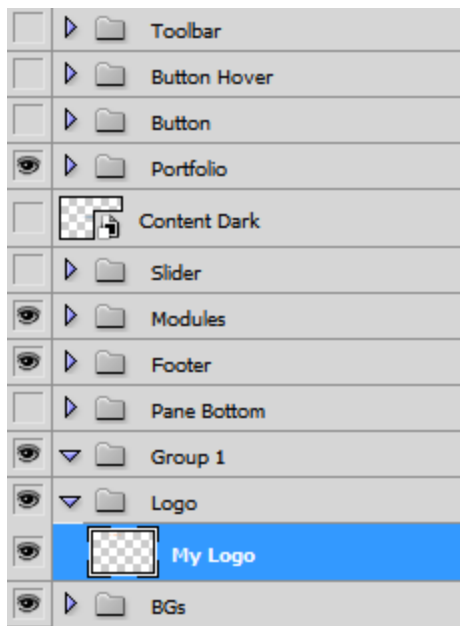

That is done. All we have to do is to cut new background image for web usage. Go to **images/layouts-fancy/** folder. Find the appropriate files and pay attention to their size. It will be very good if it will be the same. In this folder we should replace **bg.jpg** image. Bg.jpg – is the 1400px in width and 500px in height.

To make such image you'll need to select Logo and BGs layer groups and to merge them to one image. Then select area 1400x500px, copy to new psd project and save as mentioned above bg.jpg file.

If your background image is not 1400x500px, you'll need to fix its size in CSS file. After file replacement we need to open css/skyline-fancy.css and to find rules for body background

```

14  #background {
15      background:url(../images/layouts-fancy/bg.jpg) no-repeat top;
16      height: 500px;
17      min-width: 910px;
18      position: absolute;
19      top: 0;
20      width: 100%;
21  }

```

Diagram illustrating the CSS rule for the background image. The rule is for the `#background` selector. The `background` property is set to `url(../images/layouts-fancy/bg.jpg) no-repeat top`. The `height` is set to `500px`. The `min-width` is set to `910px`. The `position` is set to `absolute`. The `top` is set to `0`. The `width` is set to `100%`. Annotations point to the `height: 500px;` line, labeled "Image height", and the `background:url(../images/layouts-fancy/bg.jpg)` line, labeled "Image source".

As you can see it's very easy to customize Sky Line template, all you need is to find appropriate layer in psd file, replace existing image and make some changes in CSS file.

14. JavaScripts

Sky Line Template uses 7 JavaScript files

Attachment of JavaScript files can be found in the HEAD section of index.php file:

```
<head>
-----
<script type="text/javascript" src="scripts/jquery-1.5.2.min.js"></script>
<script type="text/javascript" src="scripts/jquery-ui-1.8.11.custom.min.js"></script>
<script type="text/javascript" src="scripts/idangerous.zoomslider.js"></script>
<script type="text/javascript" src="scripts/cufon-yui.js"></script>
<script type="text/javascript" src="scripts/Myriad_Pro_400-Myriad_Pro_600.font.js"></script>
<script type="text/javascript" src="scripts/skyline-fancy.js"></script>
<script type="text/javascript" src="scripts/skyline-fancy.settings.js"></script>
-----
</head>
```

You can easily change the path or filename in the **src** attribute of **script** tag.

The first script file is the jQuery (JavaScript library that greatly reduces the amount of code that you must write). [Visit official website](#).

Second script file (jquery-ui-1.8.10.min.js) is the jQuery UI library. It makes available to drag and resize windows. [Visit official website](#).

Third script file (idangerous.zoomslider.js) is the Zoom Slider script.

Next script file (cufon-yui.js) is the Cufon library. Used here for text replacement with Myriad Pro font. [Visit official website](#).

Next script file (Myriad_Pro_400-Myriad_Pro_600.font.js) is the encoded Myriad Pro font.

Next script file (skyline-fancy.js) is the custom script which is responsible for all animation, Ajax requests in Sky Line. This is the main file of the template.

Skyline-fancy.settings.js – is the file with configuration variables for template.

15. Ajax Contact Form

HTML code of the contact page is in the **content/contacts.php** file:

```
<h2 class="window-heading">Contacts</h2>
<p>You can contact us using the following contact form:</p>
<form name="contact" class="contact-form" action="javascript:sendMessage()" method="post">
  <p>
    <label> Your Name:*<br>
    <input id="contact_name" onkeyup="validateText('contact_name',6)" type="text" class="text" name=
"name" size="30" />
    </label>
  </p>
  <p>
    <label> Your Email:*<br>
    <input id="contact_email" onkeyup="validateEmail()" type="text" class="text" name="email" size=
"30" />
    </label>
  </p>
  <p>
    <label> Subject:*<br>
    <input id="contact_subject" onkeyup="validateText('contact_subject',6)" style="color:#777" type=
"text" class="text" name="subject" size="30" />
    </label>
  </p>
  <p>
    <label> Message:*<br>
    <textarea id="contact_message" onkeyup="validateMessage()" name="message" class="textarea" cols=
"30" rows="10"></textarea>
    </label>
  </p>
  <p><em>Fields marked with an asterisk(*) are required</em></p>
  <input type="submit" name="Submit" class="button" value="Send Message" />
</form>
```

If the all fields are correct sendMessage() script will send and Ajax request to the php mailing script located in the **scripts/send_message.php** file. This script will return a status message. Let's look at this script more closely:

```
<?php
if (isset($_POST['name'])) $name = $_POST['name'];
if (isset($_POST['email'])) $email = $_POST['email'];
if (isset($_POST['subject'])) $subject = $_POST['subject'];
if (isset($_POST['message'])) $message = $_POST['message'];
$mail_to = "info@idangero.us"; // change this email to yours
$message = stripslashes($message);
$headers = "From: ".$name." <".$email.">\r\n";
$headers .= "Reply-To: ".$email."\r\n";
$headers .= "X-Mailer: PHPMailer".".\r\n";
$headers .= "Content-Type: text/plain; charset=\\"utf-8\\"";
if (mail($mail_to, $subject, $message, $headers)) echo 1;
else echo 0;
?>
```

Checking for existence of these variables.

Message will be sent to this e-mail address. So you have to change it to yours

If the message was successfully sent, the script will return "1", otherwise it will return "0".

Now let's look at the status messages located in the following files:

includes/message_sent.php

```
<h4 class="notification"><span class="message-sent"></span>Thanks! Your message has been  
successfully sent.</h4>
```

includes/server_error.php

```
<h4 class="notification"><span class="message-sent"></span>Thanks! Your message has been  
successfully sent.</h4>
```

includes/message_error.php

```
<h4 class="notification">Required fields are empty or filled not correctly</h4>
```

You can easily edit this status messages using the any HTML formatting.

16. Licensing Terms

Regular License (RL)

RL gives you as a customer non-exclusive & non-transferable right to use the product you've bought, in this case is the **Sky Line** (further "**Item**")

1. We do not limit the number of **Item**'s copies you are going to use. Using one **Item** you can create, for example, even 100 web-sites.
2. You can use the **Item** by itself or it's also possible to apply it in other project you work at.
3. You can use the **Item** for your own purpose as well as for your clients.
4. You can use the **Item** in commercial projects.
5. You can reproduce the **Item**:
 - on a web-site or as a web-site
 - as a part of software you create not for sale
 - as a printed variant

- in digital(electronic) format (as a presentation or an e-book)
 - in video products
6. All photos used on iDangero.us for demonstration photo gallery functioning are our private property (if only there is nothing said about contrary). It's prohibited to use these photos wherever.
 7. You are not allowed to sell, resell, license or give the **Item** free (any way) without our written consent. Please, do not offer to do it to any person.
 8. You also do not have the right to use the **Item** in a project for selling (for example, for other templates, scripts, graphics and so on).
 9. It's prohibited to rework / redesign / reproduce the **Item** (i.e.to rename it or change graphics & so on) and after this to sell it as your own.
 10. In spite of reselling limitation you could claim money for the **Item** from your client.
 11. If the **Item** (the whole **Item** or its parts) is created with materials used by GNU General Public License (GPL) (or some other license) it means you should follow all the terms of the license using the **Item**.