
CIFAR-10: IID, seed 42 – per-trap signals


Round 20; 100 clients; 40% free riders. Blue circles: honest. Orange triangles: free riders.
Top: Trap A. Bottom: Trap B. No sorting or jitter; coincident points may hide clients.

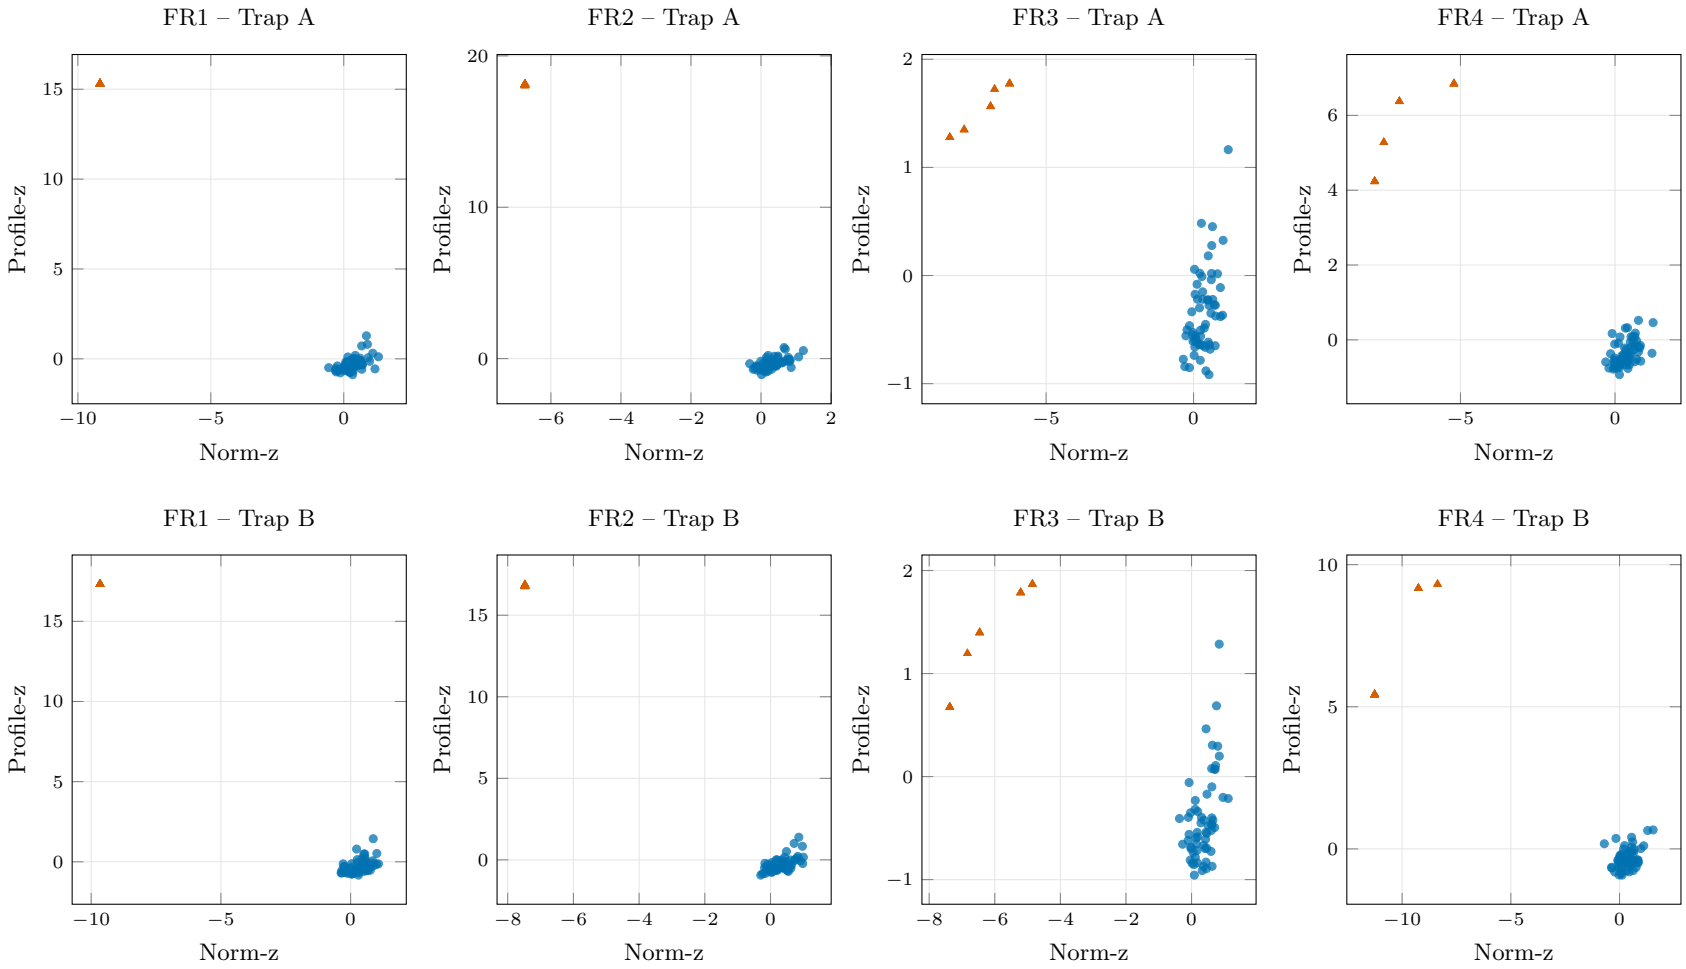

Axes scale independently. FR1's 40 identical exact-zero responses coincide. Labels are evaluation-only.

CIFAR-10: Non-IID, seed 42 – per-trap signals


Round 20; 100 clients; 40% free riders. Blue circles: honest. Orange triangles: free riders.
Top: Trap A. Bottom: Trap B. No sorting or jitter; coincident points may hide clients.

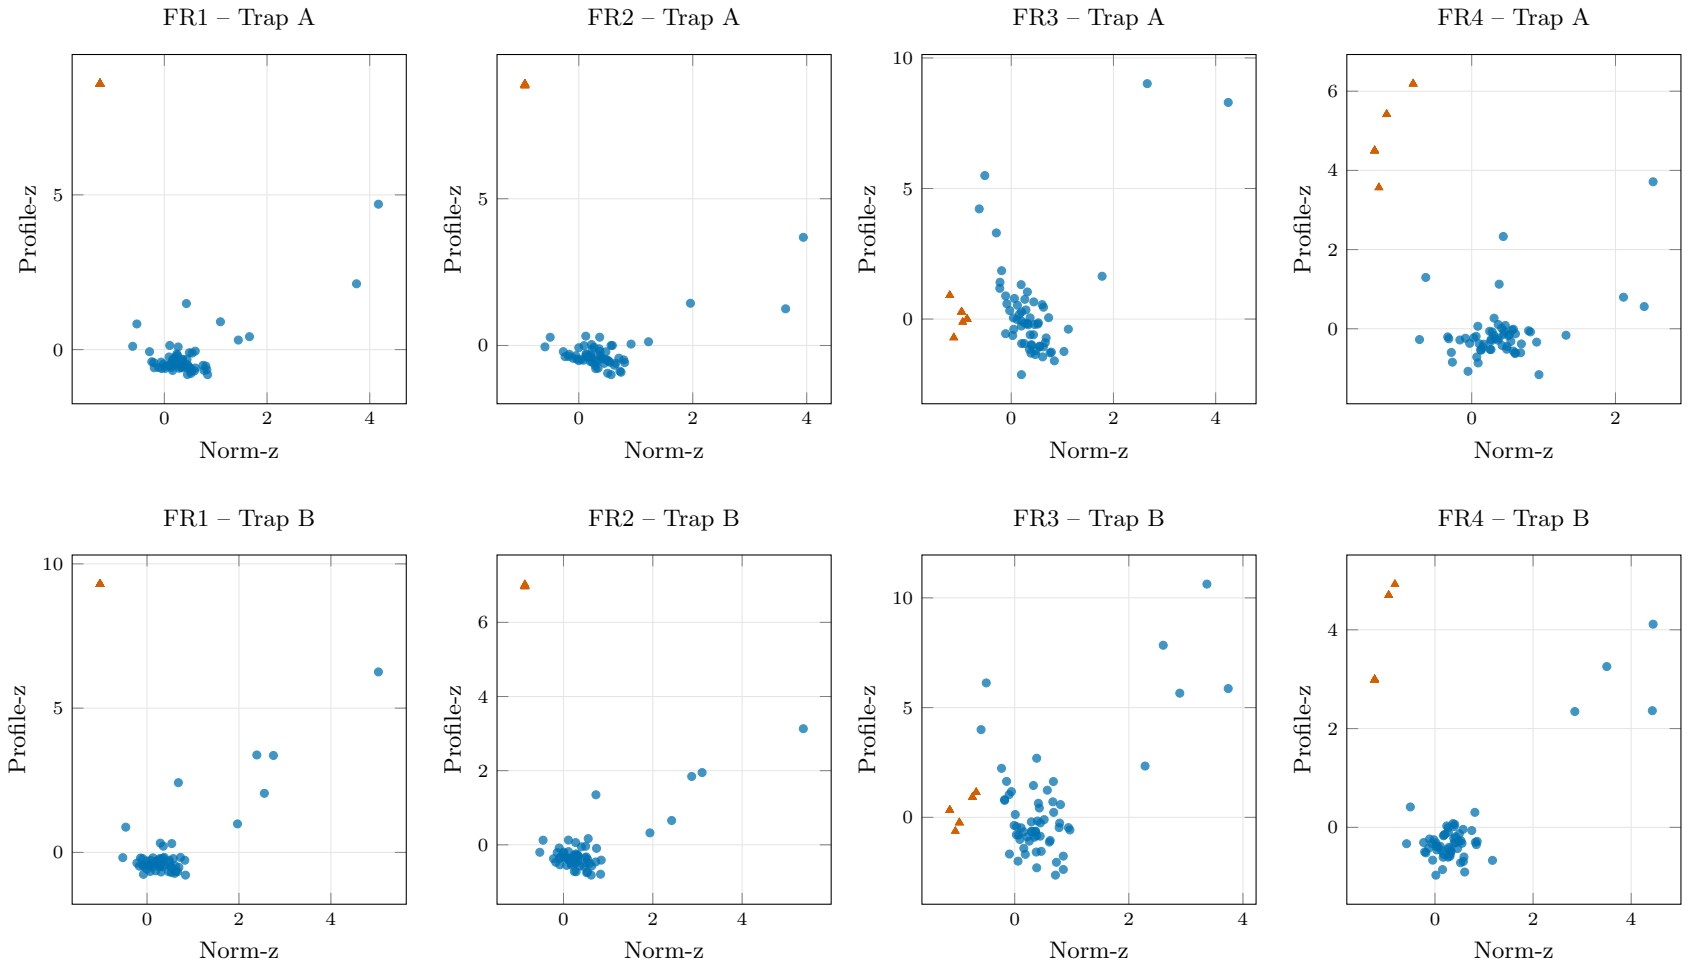

Axes scale independently. FR1's 40 identical exact-zero responses coincide. Labels are evaluation-only.

CIFAR-10: combined decision score at round 20

$D = (D_A + D_B)/2$, with D_t = profile-z_t − norm-z_t.
Blue: honest. Orange: free riders. Dashed lines: frozen rule's bootstrap lower/upper average-view boundaries.
Client IDs are unsorted. Decisions also require agreement on both trap views and the majority gate.

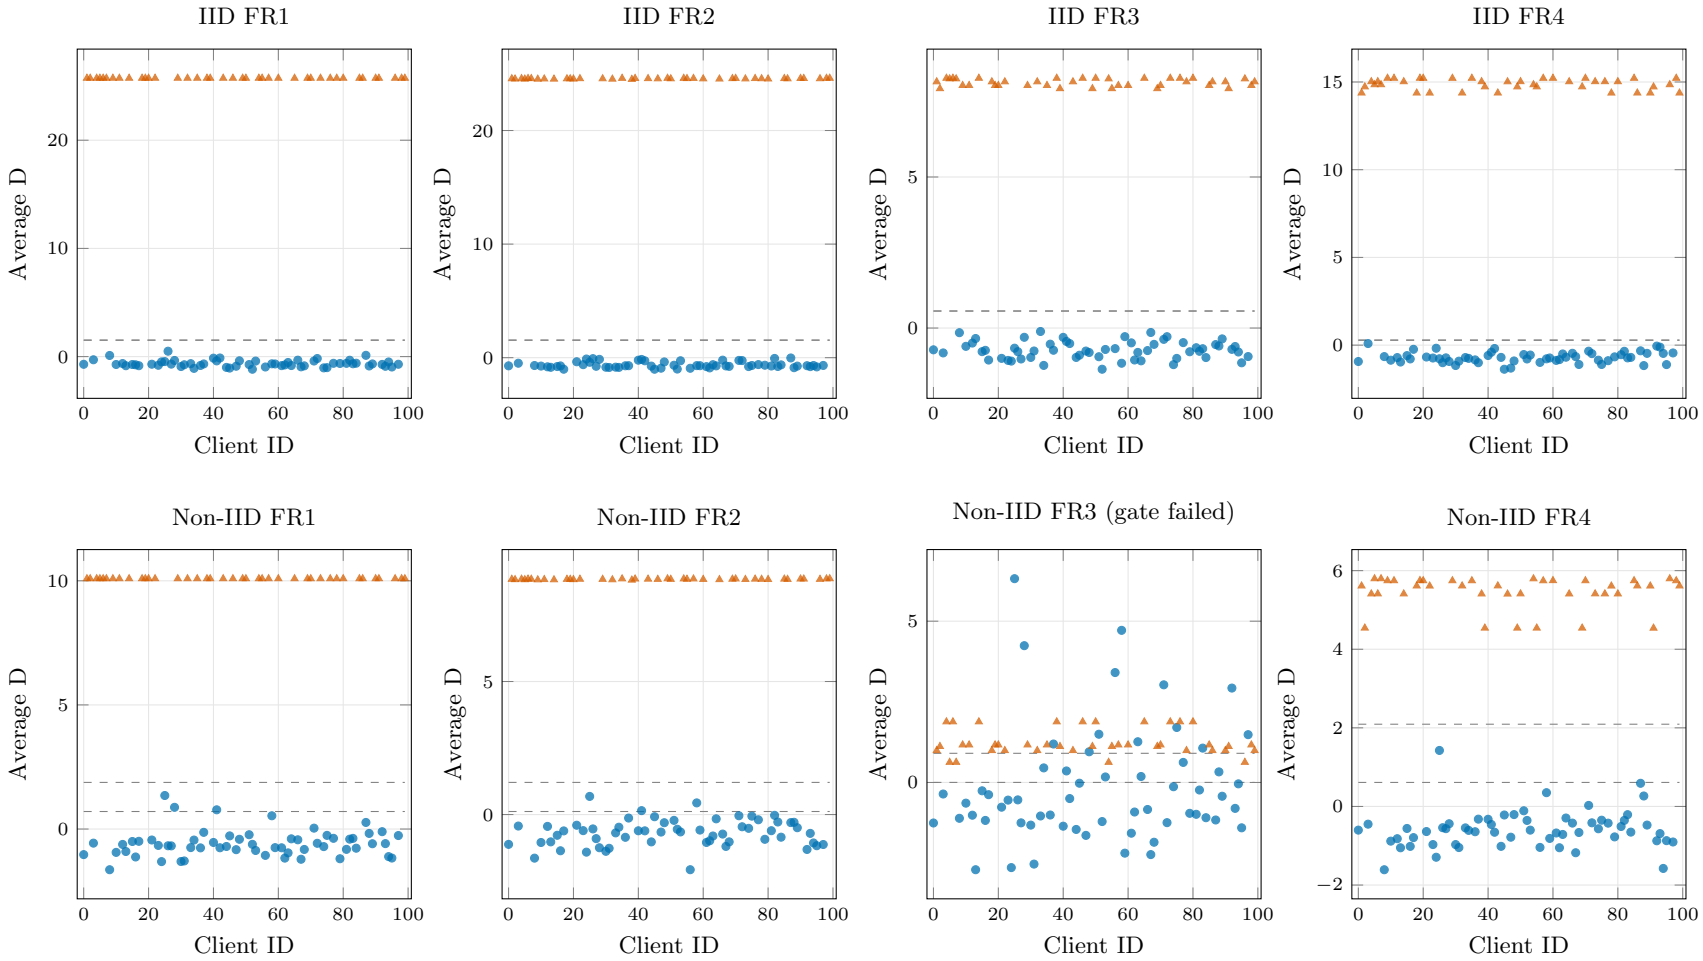

Non-IID FR3: everyone remains candidate because the lower-score cohort fails the majority check.
These plots do not tune thresholds and no clients were removed.