

Classify the Model then Search for answer

Lets see if we can first predict the tag and then We will add the guessed Tag into the query and then will compare the distances of query and our database.

```
In [2]: 1 import warnings
2 warnings.filterwarnings("ignore")
3 import pandas as pd
4 import sqlite3
5 import csv
6 import matplotlib.pyplot as plt
7 import seaborn as sns
8 import numpy as np
9 from wordcloud import WordCloud
10 import re
11 import os
12 from sqlalchemy import create_engine # database connection
13 from nltk.corpus import stopwords
14 from nltk.tokenize import word_tokenize
15 from nltk.stem.snowball import SnowballStemmer
16 from sklearn.feature_extraction.text import CountVectorizer
17 from sklearn.feature_extraction.text import TfidfVectorizer
18 from sklearn import metrics
19 from sklearn.metrics import f1_score, precision_score, recall_score
20 from datetime import datetime
21 from sklearn.metrics.pairwise import cosine_similarity
22 from sklearn.metrics import pairwise_distances
23 from sklearn.linear_model import SGDClassifier
```

```
In [198]: 1 con = sqlite3.connect('dataset/processed.db')
2 processed = pd.read_sql_query("""SELECT * FROM processed""", con)
3 con.close()
```

```
In [199]: 1 processed = processed.drop(["index"], axis=1)
```

```
In [200]: 1 # processed = processed[processed.Title != ""]
          2 processed.head()
```

Out[200]:

	Title	Body	Tags
0	implementing boundary value analysis software ...	<pre><code>#include<iostream>\n#include<...>	c++
1	dynamic datagrid binding silverlight	<p>I should do binding for datagrid dynamicall...	c#
2	dynamic datagrid binding silverlight	<p>I should do binding for datagrid dynamicall...	c#
3	java lang nosuchmethoderror javax servlet serv...	<p>i want to have a servlet to process inputs ...	java
4	specified initialization vector iv match block...	<p>I've had troubles using an CryptoStream for...	c#

```
In [201]: 1 labels = {"c#" : 0, "java" : 1, "c++" : 2, "c" : 3, "ios" : 4}
          2 labels_map = { 0 : "c#" , 1 : "java" , 2 : "c++" , 3 : "c" , 4 : "ios" }
```

```
In [202]: 1 processed["Tags"] = processed["Tags"].map(labels)
```

```
In [203]: 1 processed.head()
```

Out[203]:

	Title	Body	Tags
0	implementing boundary value analysis software ...	<pre><code>#include<iostream>\n#include<...>	2
1	dynamic datagrid binding silverlight	<p>I should do binding for datagrid dynamicall...	0
2	dynamic datagrid binding silverlight	<p>I should do binding for datagrid dynamicall...	0
3	java lang nosuchmethoderror javax servlet serv...	<p>i want to have a servlet to process inputs ...	1
4	specified initialization vector iv match block...	<p>I've had troubles using an CryptoStream for...	0

```
In [204]: 1 x = processed.Title.values
          2 y = processed.Tags.values
```

```
In [205]: 1 from sklearn.model_selection import train_test_split
          2
          3 X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.20, stratify = y)
          4 X_train, X_cv, y_train, y_cv = train_test_split(X_train, y_train, test_size=0.25, stratify = y_train)
          5 X_train.shape, X_test.shape, X_cv.shape
```

```
Out[205]: ((343506,), (114503,), (114503,))
```


```
In [83]: 1 # On Unigram
```

```
In [206]: 1 tfidf = TfidfVectorizer()
          2 X_train = tfidf.fit_transform(X_train)
          3 X_cv = tfidf.transform(X_cv)
          4 X_test = tfidf.transform(X_test)
          5 X_train.shape, X_cv.shape, X_test.shape
```

```
Out[206]: ((343506, 52506), (114503, 52506), (114503, 52506))
```

```
In [82]: 1 from sklearn.metrics.classification import accuracy_score
          2 score_train = []
          3 score_cv = []
          4 for i in ([1e-9, 1e-8, 1e-7, 1e-6, 0.00001, 0.0001, 0.001, 0.01, 0.1]):
          5     clf = SGDClassifier(alpha = i, loss = "log", class_weight="balanced", n_jobs=-1)
          6     clf.fit(X_train, y_train)
          7     y_predict = clf.predict(X_train)
          8     y_predict_cv = clf.predict(X_cv)
          9     score_train.append(accuracy_score(y_train, y_predict))
         10     score_cv.append(accuracy_score(y_cv, y_predict_cv))
```

```
In [92]: 1 import matplotlib.pyplot as plt
2 lis = [0.000000001, 0.000000001, 0.00000001, 0.000001, 0.00001, 0.0001, 0.001]
3 plt.plot(score_train[:-2], lis, label = "Train Accuracy")
4 plt.plot(score_cv[:-2], lis, label = "Cv Accuracy")
5 plt.legend()
6 plt.show()
```

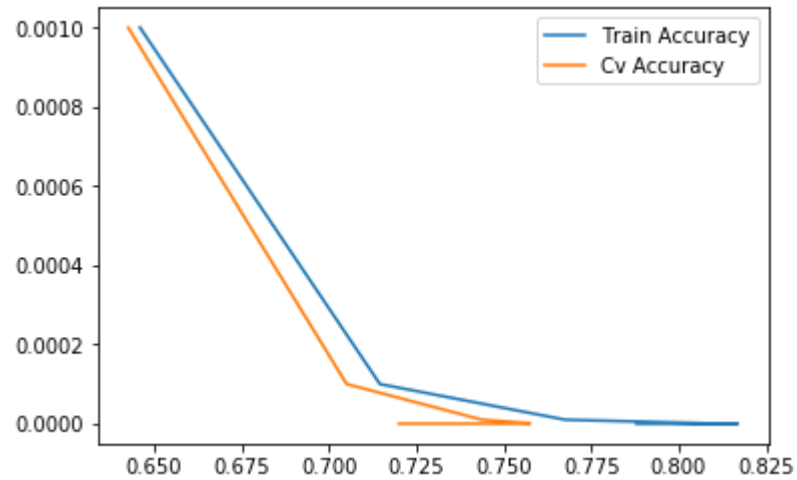


```
In [103]: 1 best_alpha = 1e-7
```

```
In [137]: 1 from sklearn.metrics.classification import confusion_matrix
2 import seaborn as sns
3 clf = SGDClassifier(alpha = best_alpha, loss = "log", class_weight="balanced", n_jobs=-1)
4 clf.fit(X_train, y_train)
5 y_predict = clf.predict(X_test)
6 acc = accuracy_score(y_test, y_predict)
7 cm = confusion_matrix(y_test, y_predict)
8 print("The Accuracy of model is : ", acc)
```

The Accuracy of model is : 0.7585035202040495

```
In [101]: 1 x_ax = ["c#", "java", "c++", "c", "ios"]
2 y_ax = ["c#", "java", "c++", "c", "ios"]
3 sns.heatmap(cm, annot = True, fmt="d", xticklabels=x_ax, yticklabels=y_ax)
```

Out[101]: <matplotlib.axes._subplots.AxesSubplot at 0x1a45858208>

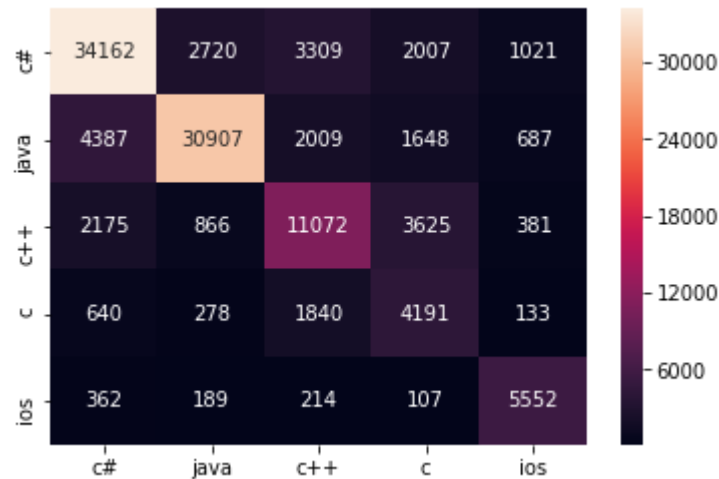


```
In [102]: 1 # We are observing as Maximum of data belongs to c# and Java
2 # hence it tend to be majority class. Confusion between C and C++
```

```
In [ ]: 1 # Lets See how SVM will perform
```

```
In [106]: 1 score_train = []
2 score_cv = []
3 for i in ([1e-9, 1e-8, 1e-7, 1e-6, 0.00001, 0.0001]):
4     clf = SGDClassifier(alpha = i, class_weight="balanced", n_jobs=-1)
5     clf.fit(X_train, y_train)
6     y_predict = clf.predict(X_train)
7     y_predict_cv = clf.predict(X_cv)
8     score_train.append(accuracy_score(y_train, y_predict))
9     score_cv.append(accuracy_score(y_cv, y_predict_cv))
```

```
In [113]: 1 lis = [0.000000001, 0.00000001, 0.0000001, 0.000001, 0.00001, 0.0001]
2 plt.plot(lis, score_train, label = "Train Accuracy")
3 plt.plot(lis, score_cv, label = "Cv Accuracy")
4 plt.legend()
5 plt.show()
```

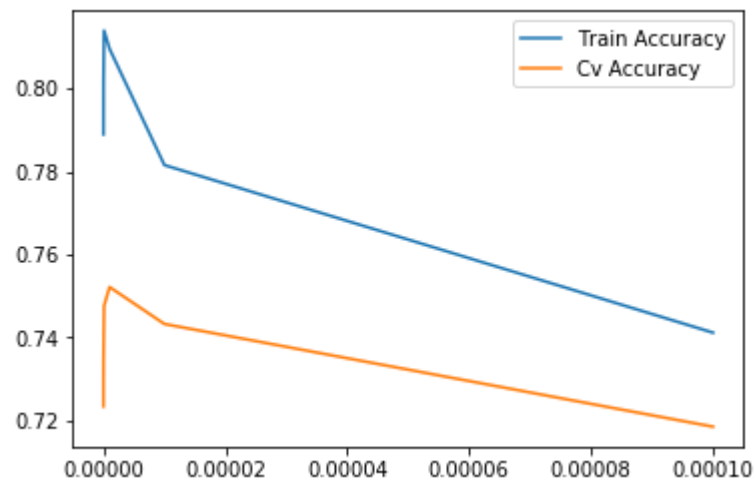


```
In [111]: 1 best_alpha = 1e-6
```

```
In [112]: 1 clf = SGDClassifier(alpha = best_alpha, class_weight="balanced", n_jobs=-1)
2 clf.fit(X_train, y_train)
3 y_predict = clf.predict(X_test)
4 acc = accuracy_score(y_test, y_predict)
5 cm = confusion_matrix(y_test, y_predict)
6 print("The Accuracy of model is : ", acc)
7 sns.heatmap(cm, annot = True, fmt="d", xticklabels=x_ax, yticklabels=y_ax)
```

The Accuracy of model is : 0.7510875072063731

Out[112]: <matplotlib.axes._subplots.AxesSubplot at 0x1a514b6e48>

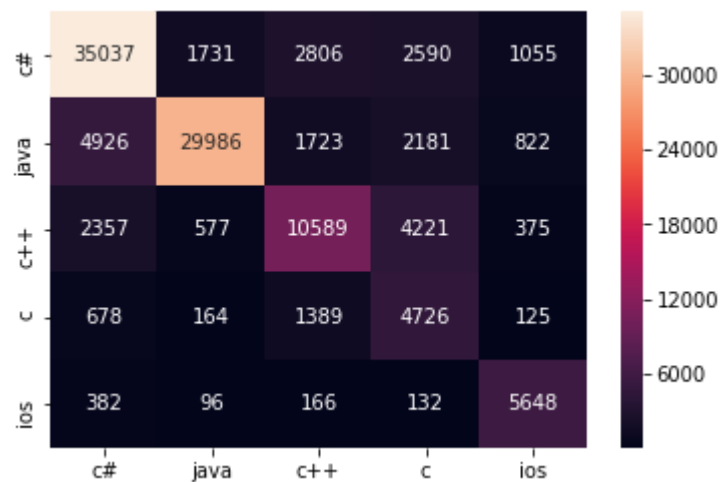

```
In [120]: 1 # Just Similar Kind of Accuracy, Now Lets See If doing bigrams Helps
2 import random
3 random.seed(42)
```

```
In [121]: 1 X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=0.20, stratify = y)
          2 X_train, X_cv, y_train, y_cv = train_test_split(X_train, y_train, test_size=0.25, stratify = y_train)
          3 X_train.shape, X_test.shape, X_cv.shape
```

```
Out[121]: ((343443,), (114482,), (114481,))
```


```
In [122]: 1 tfidf = TfidfVectorizer(ngram_range=(2,2))
          2 X_train = tfidf.fit_transform(X_train)
          3 X_cv = tfidf.transform(X_cv)
          4 X_test = tfidf.transform(X_test)
          5 X_train.shape, X_cv.shape, X_test.shape
```

```
Out[122]: ((343443, 703980), (114481, 703980), (114482, 703980))
```

```
In [123]: 1 score_train = []
          2 score_cv = []
          3 for i in ([1e-9, 1e-8, 1e-7, 1e-6, 0.00001, 0.0001]):
          4     clf = SGDClassifier(alpha = i, loss = "log", class_weight="balanced", n_jobs=-1)
          5     clf.fit(X_train, y_train)
          6     y_predict = clf.predict(X_train)
          7     y_predict_cv = clf.predict(X_cv)
          8     score_train.append(accuracy_score(y_train, y_predict))
          9     score_cv.append(accuracy_score(y_cv, y_predict_cv))
```



```
In [124]: 1 lis = [0.000000001, 0.00000001, 0.0000001, 0.000001, 0.00001, 0.0001]
          2 plt.plot(score_train, lis, label = "Train Accuracy")
          3 plt.plot(score_cv, lis, label = "Cv Accuracy")
          4 plt.legend()
          5 plt.show()
```

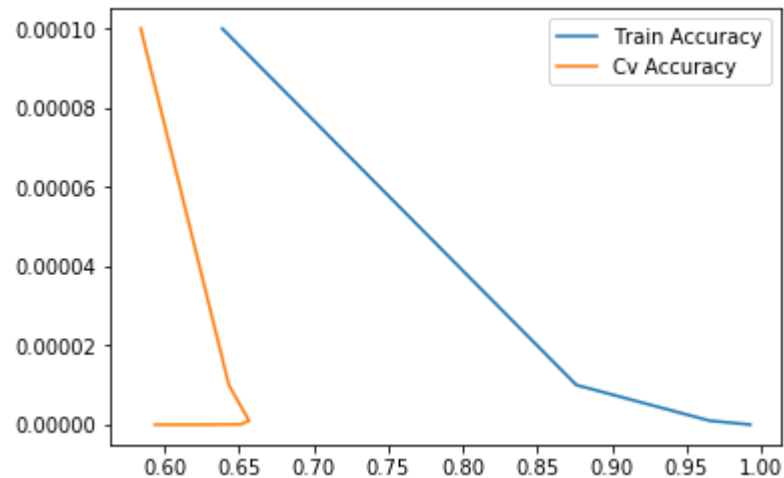

```
In [126]: 1 # CASE OF OVERFITTING
          2 best_alpha = 0.000001
```

```
In [127]: 1 clf = SGDClassifier(alpha = best_alpha, loss = "log", class_weight="balanced", n_jobs=-1)
          2 clf.fit(X_train, y_train)
          3 y_predict = clf.predict(X_test)
          4 acc = accuracy_score(y_test, y_predict)
          5 cm = confusion_matrix(y_test, y_predict)
          6 print("The Accuracy of model is : ", acc)
```

The Accuracy of model is : 0.6587323771422582

```
In [ ]: 1 # Hence Bigrams are not useful so no need to go further for checking
```

```
In [175]: 1 # So lets Take our clf_final which is classifier from LR on Unigram
```

```
In [208]: 1 tfidf = TfidfVectorizer()
          2 data = tfidf.fit_transform(processed.Title)
          3 data.shape
```

```
Out[208]: (572512, 68851)
```

```
In [209]: 1 y = processed.Tags.values
```

```
In [210]: 1 clf_final = SGDClassifier(alpha = 1e-7, loss = "log", class_weight="balanced", n_jobs=-1)
          2 clf_final.fit(data, y)
```

```
Out[210]: SGDClassifier(alpha=1e-07, average=False, class_weight='balanced',
                        early_stopping=False, epsilon=0.1, eta0=0.0, fit_intercept=True,
                        l1_ratio=0.15, learning_rate='optimal', loss='log', max_iter=1000,
                        n_iter_no_change=5, n_jobs=-1, penalty='l2', power_t=0.5,
                        random_state=None, shuffle=True, tol=0.001,
                        validation_fraction=0.1, verbose=0, warm_start=False)
```

```
In [211]: 1 query = "global static variable vs static variable function"
```

```
In [160]: 1 # Now we will add this return label into the title and then we will search for
          2 # the Similar queries to see the improvement
```

```

In [228]: 1 def process_query(query):
2     preprocessed_reviews = []
3     sentence = re.sub("\S*\d\S*", "", query).strip()
4     sentence = re.sub('[^A-Za-z]+', ' ', sentence)
5     sentence = ' '.join(e.lower() for e in sentence.split() if e.lower() not in stopwords.words('english'))
6     preprocessed_reviews.append(sentence.strip())
7     return preprocessed_reviews
8
9 def tfidf_search(query):
10    query = process_query(query)
11    query_trans = tfidf.transform(query)
12    pairwise_dist = pairwise_distances(tfidf_features, query_trans)
13
14    indices = np.argsort(pairwise_dist.flatten())[0:10]
15    df_indices = list(processed.index[indices])
16    return df_indices
17
18
19 def label(query):
20    query = process_query(query)
21    query = tfidf.transform(query)
22    ans = clf_final.predict(query)
23    return labels_map[ans[0]]
24
25
26 def change_query(query):
27    tag = label(query)
28    return query + " " + tag

```

```

In [249]: 1 def enter_queries(query) :
2     print("The Query is :", query)
3     query = change_query(query)
4     df_indices = tfidf_search(query)
5     print("The Model Interpreted Query is :", query)
6     print("Top Results : ")
7     for i in (df_indices):
8         print("Title : ", processed.Title.iloc[i])

```

```
In [250]: 1 query = "synchronization"
          2 enter_queries(query)
```

The Query is : synchronization

The Model Interpreted Query is : synchronization java

Top Results :

Title : java scrollbars co operating

Title : problem using stream reader

Title : java swing jpanels painting

Title : synchronising two listbox scroll positions

Title : java benefit services implementing interface

Title : java application vs web service vs web application

Title : java subprocesses unread output streams deadlock

Title : screen switching android eclipse

Title : read android sim contacts phone contacts separately

Title : copying file specific directory installation using visual studio setup project

Note : We are getting Indices from the Database, Also we have Body of the dataset. We can make an api system where after a query user can redirected to that thread where the body of question is solved

In previous notebook where we used only Distances was giving other results related to other languages also but after using Machine learning we can see the results have improved. And are query Oriented.

Future Improvement :

We can make a web api to do what is mentioned in Note