Can we implement good quantum LDPC codes on near-term devices?

Maxime Tremblay[1], Michael Beverland[2], Nicolas Delfosse[2]

[1]Université de Sherbrooke, [2]Microsoft Research

February 4, 2022

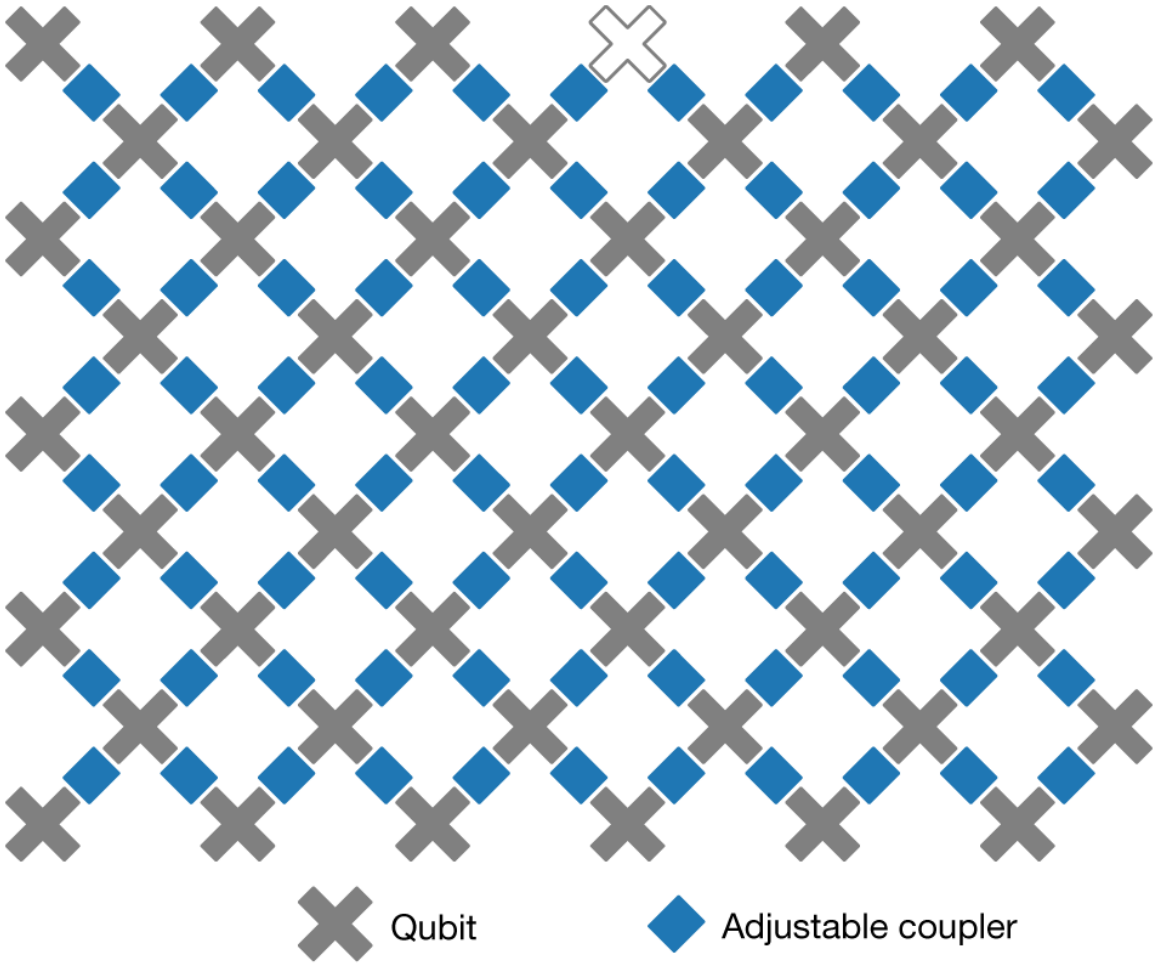

Arute et al. Nature 574, 505–510 (2019)

The IBM Quantum heavy hex lattice

As of August 8, 2021, the topology of all active IBM Quantum devices will use the heavy-hex lattice, including the IBM Quantum System One's Falcon processors installed in Germany and Japan.

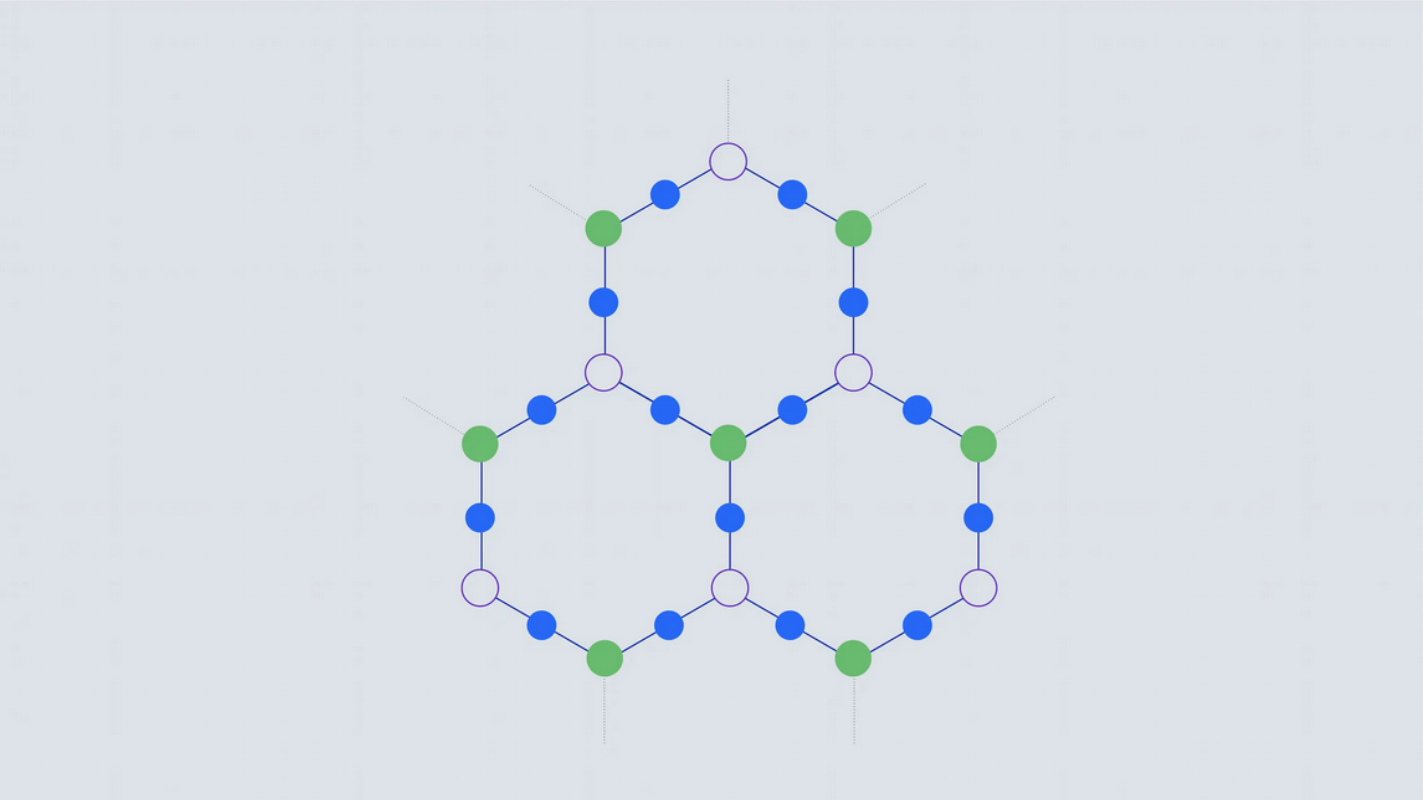

Near-term quantum computers will be locally connected.

Can we achieve large scale fault-tolerant quantum computing on locally connected devices?

Tradeoffs for reliable quantum information storage in 2D systems

Sergey Bravyi,[1] David Poulin,[2] and Barbara Terhal[1]
[1] *IBM Watson Research Center, Yorktown Heights NY 10598, USA*
[2] *Département de Physique, Université de Sherbrooke, Québec, Canada*
(Dated: September 11, 2018)

Long range interactions from local operations

Long range interactions from local operations



$$|\bar{0}\rangle \equiv |+ + \cdots + +\rangle + |- - \cdots - -\rangle$$

Long range interactions from local operations



$$|\bar{0}\rangle \equiv |+ + \cdots + +\rangle + |- - \cdots - -\rangle$$



Long range interactions from local operations

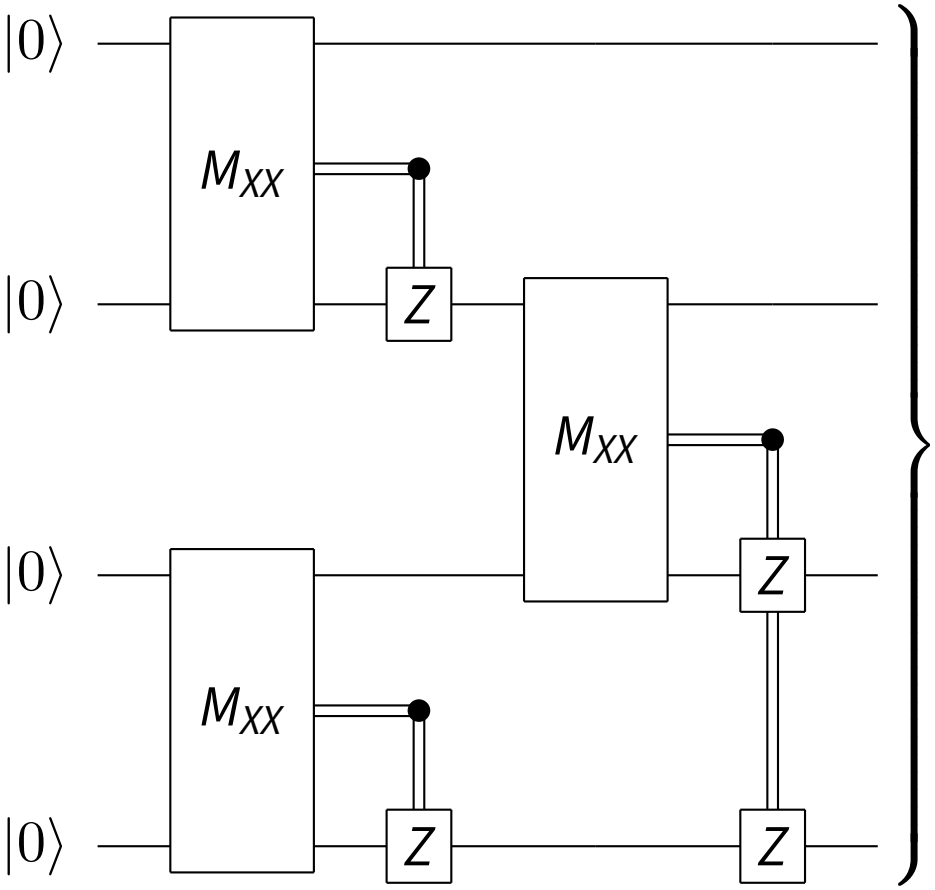

$|++++\rangle + |----\rangle$

Long range interactions from local operations

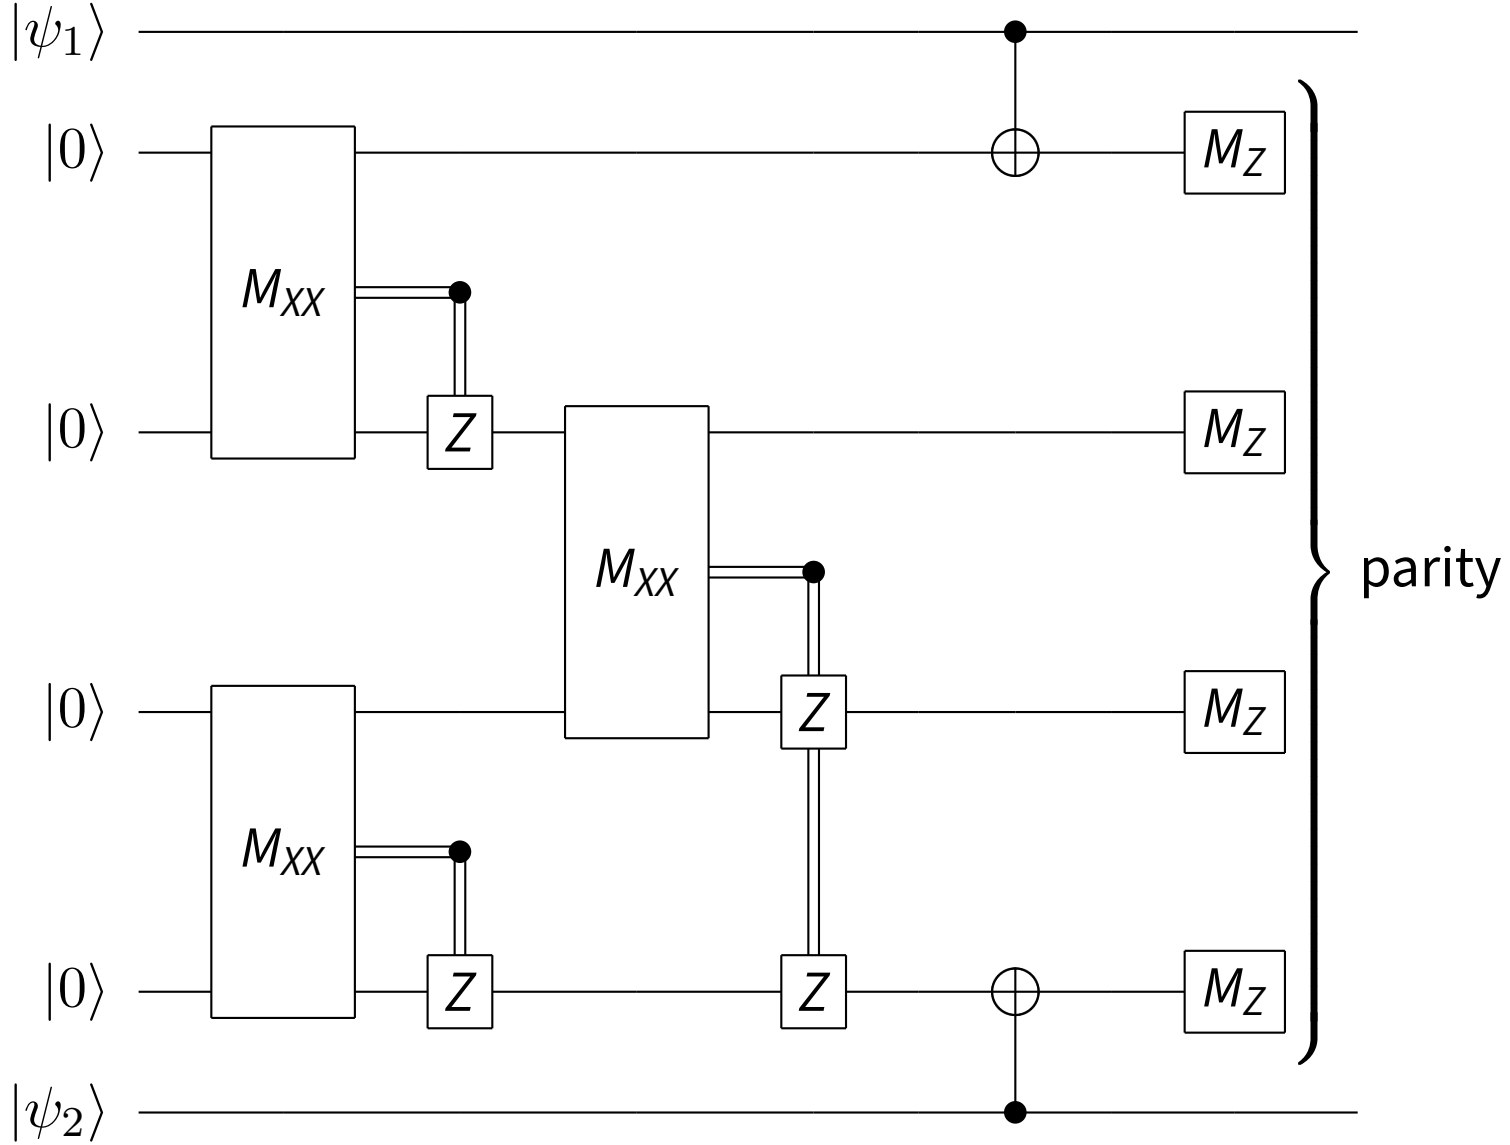

Main results

Theorem

Let C be a Clifford circuit measuring computing Pauli operators $S_1, \ldots, S_r$. Then, for any subset of qubits L, we have

$$depth(C) \geq \frac{n_{cut}}{64|\partial L|}.$$

Main results

Theorem

Let C be a Clifford circuit measuring computing Pauli operators $S_1, \ldots, S_r$. Then, for any subset of qubits L, we have

$$depth(C) \geq \frac{n_{cut}}{64|\partial L|}.$$

Corollary

For families of local-expander quantum LDPC codes of length n, a syndrome extraction circuit C implemented as a local Clifford circuit on a $\sqrt{N} \times \sqrt{N}$ grid of qubits satisfies

$$depth(C) \geq \Omega\left(\frac{n}{\sqrt{N}}\right).$$

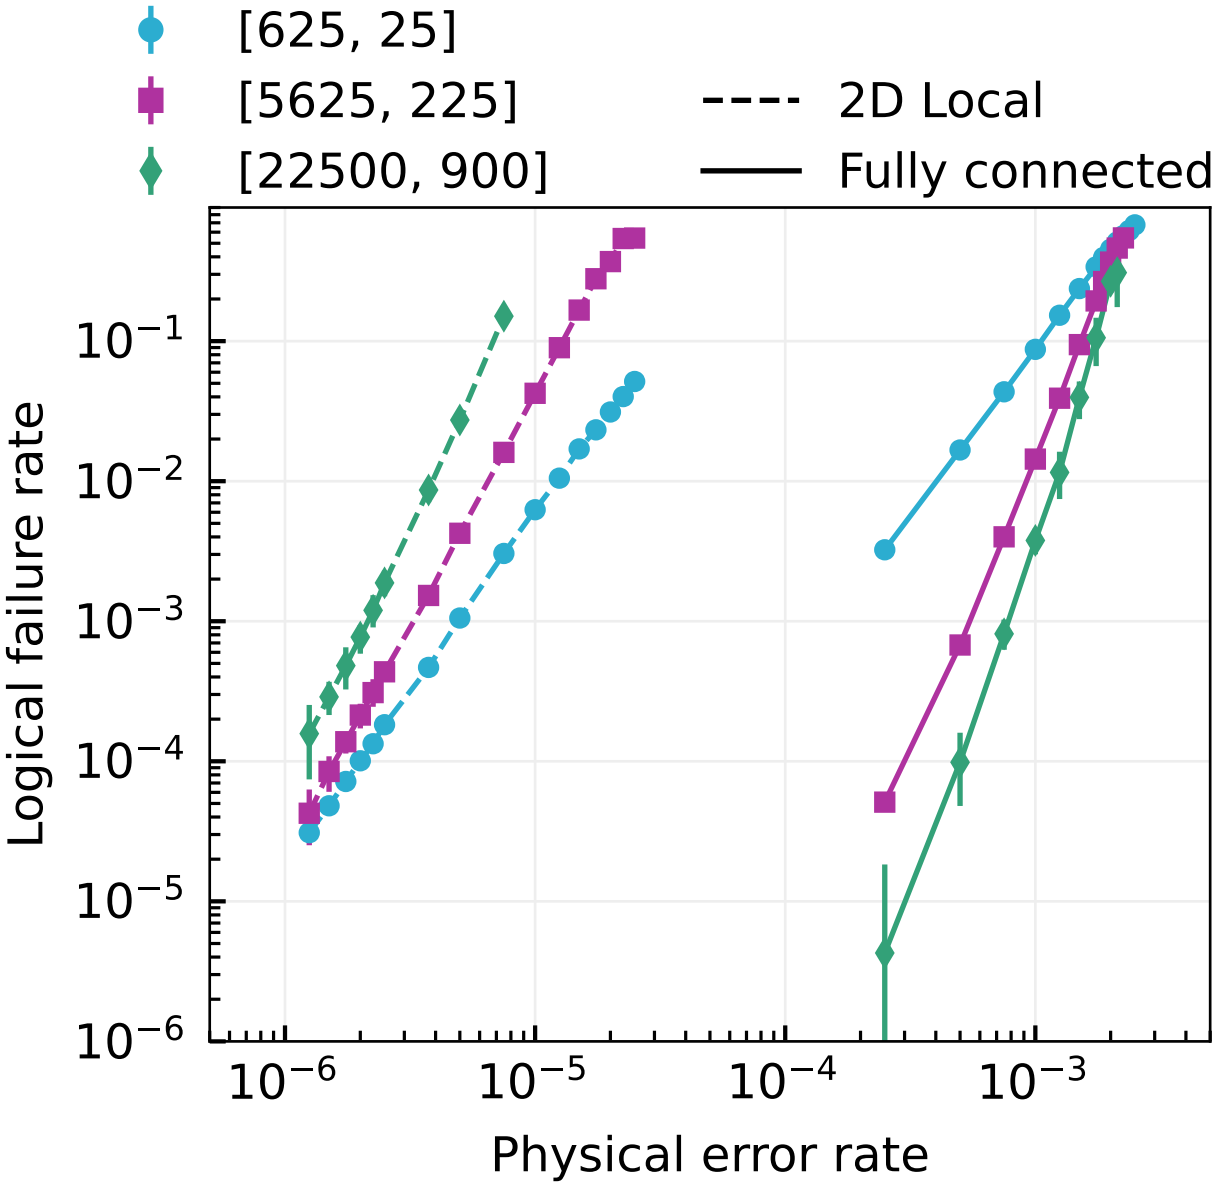
[625, 25]
[5625, 225]
[22500, 900]
2D Local
Fully connected
Logical failure rate
Physical error rate
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
10^{-6}
10^{-5}
10^{-4}
10^{-3}

References

- Bounds on stabilizer measurement circuits and obstructions to local implementations of quantum LDPC codes
  arXiv 2109.14599
- Constant-overhead quantum error correction with thin planar connectivity
  arXiv 2109.14609

Outline

1. Background and definitions
2. Proof of the main theorem
3. Circuit implementations
4. Numerical experiments

Background and definitions

Clifford circuit

- Preparations of $|0\rangle$ and $|+\rangle$ and classical bits.

Clifford circuit

- Preparations of $|0\rangle$ and $|+\rangle$ and classical bits.
- Single-qubit and two-qubit Pauli measurements.

Clifford circuit

- Preparations of $|0\rangle$ and $|+\rangle$ and classical bits.
- Single-qubit and two-qubit Pauli measurements.
- Single-qubit and two-qubit unitary Clifford gates.

Clifford circuit

- Preparations of $|0\rangle$ and $|+\rangle$ and classical bits.
- Single-qubit and two-qubit Pauli measurements.
- Single-qubit and two-qubit unitary Clifford gates.
- Classically-controlled Pauli operators.

Clifford circuit

- Preparations of $|0\rangle$ and $|+\rangle$ and classical bits.
- Single-qubit and two-qubit Pauli measurements.
- Single-qubit and two-qubit unitary Clifford gates.
- Classically-controlled Pauli operators.
- Ouput the parity of some subsets of measurement outcomes.

Clifford circuit

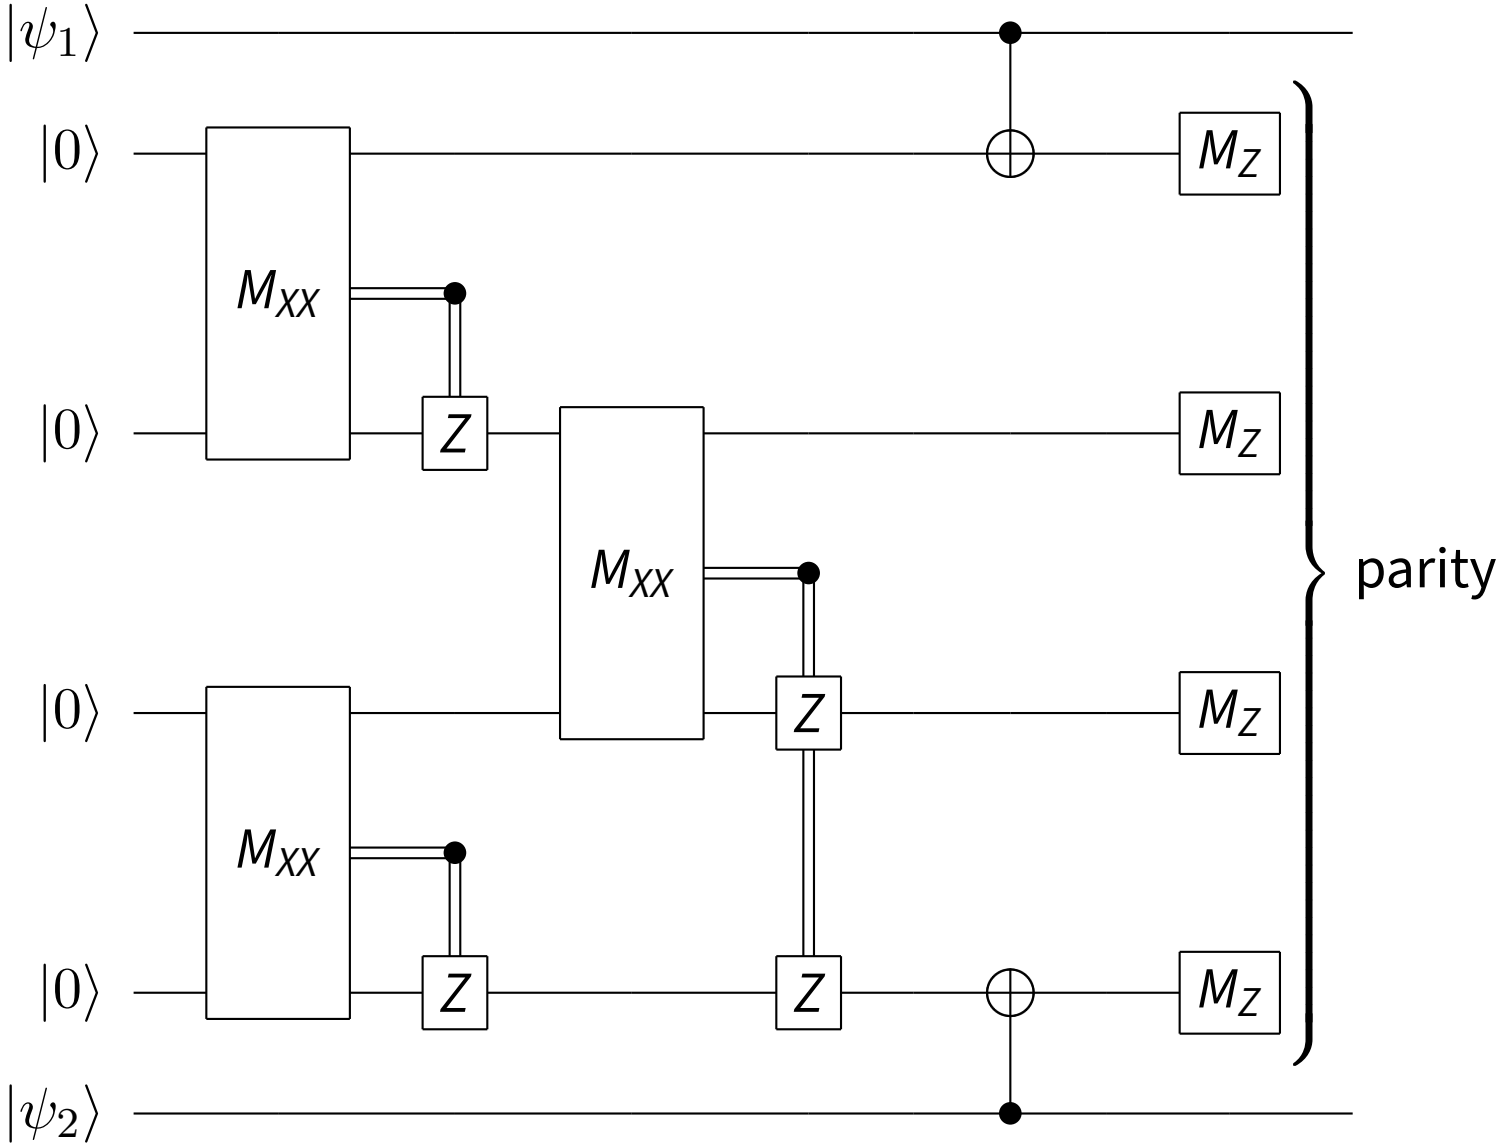

Local circuit

A b-local circuit is a circuit with qubits placed on a subset of the $\mathbb{Z} \times \mathbb{Z}$ grid such that any two-qubit operation acts on qubits at distance at most b from each other.

Local circuit

A b-local circuit is a circuit with qubits placed on a subset of the $\mathbb{Z} \times \mathbb{Z}$ grid such that any two-qubit operation acts on qubits at distance at most b from each other.



Connectivity graph

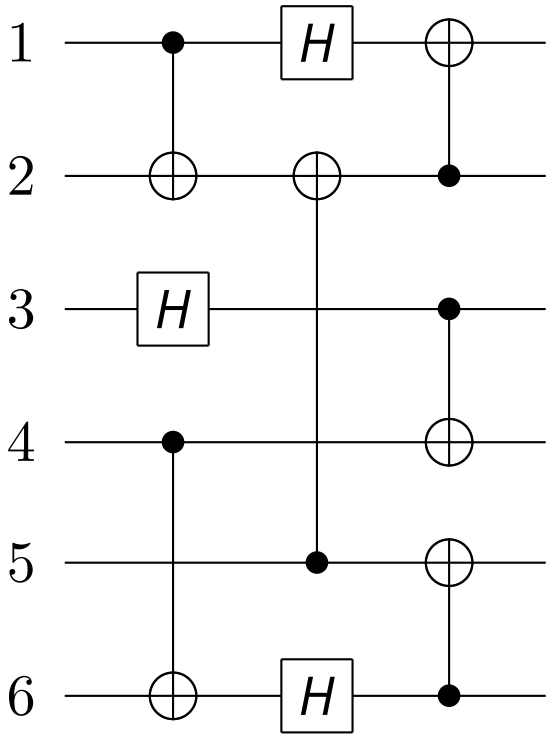

Connectivity graph

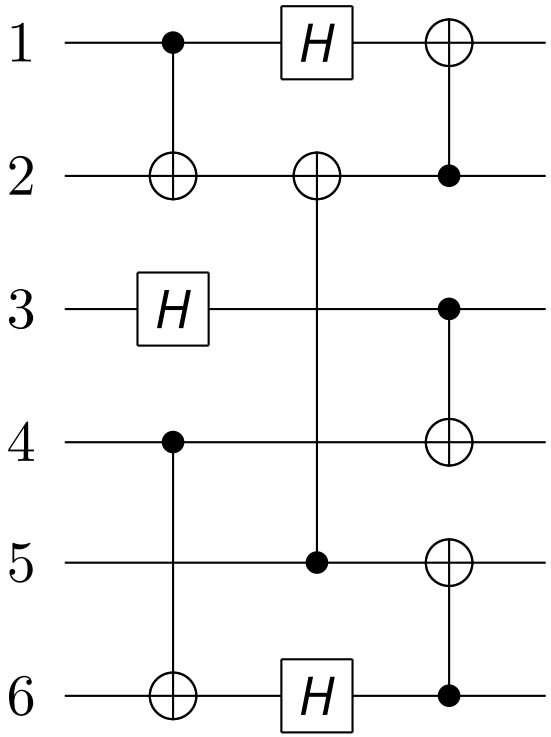

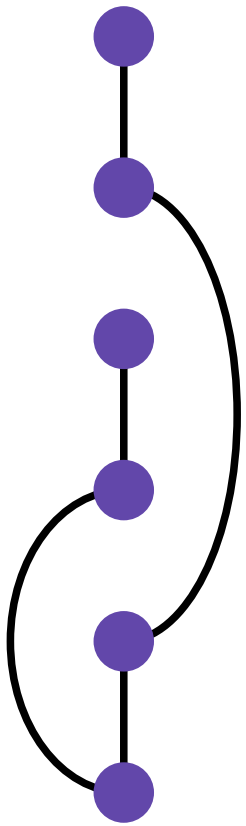

Stabilizer code

Stabilizer group

$$\mathcal{S} = \langle S_1, S_2, \ldots, S_r \rangle \subset \mathcal{P}_n \setminus \{-I\} \text{ such that } S_i S_j = S_j S_i$$

Stabilizer code

Stabilizer group

$$\mathcal{S} = \langle S_1, S_2, \ldots, S_r \rangle \subset \mathcal{P}_n \setminus \{-I\} \text{ such that } S_i S_j = S_j S_i$$

Stabilizer code

common $+1$ eigenspace of $\mathcal{S}$

$$C(S) = \{ |\psi\rangle \ : \ S\, |\psi\rangle = \psi \, \forall S \in \mathcal{S} \}$$

Stabilizer code

Stabilizer group

$$\mathcal{S} = \langle S_1, S_2, \ldots, S_r \rangle \subset \mathcal{P}_n \setminus \{-I\} \text{ such that } S_i S_j = S_j S_i$$

Stabilizer code

common $+1$ eigenspace of $\mathcal{S}$

$$C(S) = \{ |\psi\rangle \; : \; S\,|\psi\rangle = \psi \, \forall S \in \mathcal{S} \}$$

Example

The five qubits code

$$\mathcal{S} = \langle XXZIZ, ZXXZI, IZXXZ, ZIZXX \rangle$$

Pauli measurement circuit

- Consider n-qubit independent commuting Pauli operators $S_1, \ldots, S_r$.

Pauli measurement circuit

- Consider n-qubit independent commuting Pauli operators $S_1, \ldots, S_r$.
- For $\boldsymbol{m} = (m_1, \ldots, m_r) \in \mathbb{Z}_2^r$, denote $\Pi_{\boldsymbol{m}}$ the projector onto the common eigenspace of S_i with value $(-1)^{m_i}$.

Pauli measurement circuit

- Consider n-qubit independent commuting Pauli operators $S_1, \ldots, S_r$.
- For $\boldsymbol{m} = (m_1, \ldots, m_r) \in \mathbb{Z}_2^r$, denote $\Pi_{\boldsymbol{m}}$ the projector onto the common eigenspace of S_i with value $(-1)^{m_i}$.
- A Pauli measurement circuit maps a n-qubit state ρ to $\Pi_{\boldsymbol{m}} \rho \Pi_{\boldsymbol{m}}$ with probability $\mathrm{Tr}(\Pi_{\boldsymbol{m}} \rho)$ and output $\boldsymbol{m}$.

Pauli measurement circuit

- Consider n-qubit independent commuting Pauli operators $S_1, \ldots, S_r$.
- For $\boldsymbol{m} = (m_1, \ldots, m_r) \in \mathbb{Z}_2^r$, denote $\Pi_{\boldsymbol{m}}$ the projector onto the common eigenspace of S_i with value $(-1)^{m_i}$.
- A Pauli measurement circuit maps a n-qubit state ρ to $\Pi_{\boldsymbol{m}} \rho \Pi_{\boldsymbol{m}}$ with probability $\mathrm{Tr}(\Pi_{\boldsymbol{m}} \rho)$ and output $\boldsymbol{m}$.
- The circuit use $N = n + a$ qubits where a is the number of ancilla qubits.

Tanner graph

$$S = \{XXIII, ZXIZI, IIYZZ\}$$

Tanner graph

$$S = \{XXIII, ZXIZI, IIYZZ\}$$

$T(S) = (V_Q \cup S, E)$
$\{q_i, S_j\} \in E$ iff S_j acts non-trivially on q_i

Tanner graph

$$S = \{XXIII, ZXIZI, IIYZZ\}$$

$$T(S) = (V_Q \cup S, E)$$
$\{q_i, S_j\} \in E$ iff S_j acts non-trivially on q_i



Contracted Tanner graph

$$S = \{XXIII, ZXIZI, IIYZZ\}$$

Contracted Tanner graph

$$S = \{XXIII, ZXIZI, IIYZZ\}$$

$$\bar{T}(S) = (V_Q, \bar{E})$$

$\{q_i, q_j\} \in \bar{E}$ iff $\exists S_k$ actings non-trivially on q_i

Contracted Tanner graph

$$S = \{XXIII, ZXIZI, IIYZZ\}$$

$$\bar{T}(S) = (V_Q, \bar{E})$$

$\{q_i, q_j\} \in \bar{E}$ iff $\exists S_k$ actings non-trivially on q_i



Quantum LDPC codes

A family of quantum LDPC codes $(Q_i)_i$ is a family of stabilizer codes such that the degree of the Tanner graph T_i are bounded by some constant independent of i.

Local-expansion

The Cheeger constant of a graph $G = (V, E)$ is defined as

$$h_\varepsilon(G) = \min_{\substack{L \subseteq V \\ |L| \leq \varepsilon |V|/2}} \frac{|\partial L|}{|L|}.$$

Local-expansion

The Cheeger constant of a graph $G = (V, E)$ is defined as

$$h_\varepsilon(G) = \min_{\substack{L \subseteq V \\ |L| \leq \varepsilon |V|/2}} \frac{|\partial L|}{|L|}.$$

A family of graphs $(G_i)_{i \in \mathbb{N}}$ is an (α, ε)-expander graph family if $h_\varepsilon(G_i) \geq \alpha$ for all i.

Local-expansion

The Cheeger constant of a graph $G = (V, E)$ is defined as

$$h_\varepsilon(G) = \min_{\substack{L \subseteq V \\ |L| \leq \varepsilon |V|/2}} \frac{|\partial L|}{|L|}.$$

A family of graphs $(G_i)_{i \in \mathbb{N}}$ is an (α, ε)-expander graph family if $h_\varepsilon(G_i) \geq \alpha$ for all i.

A family of quantum local-expander codes is a family of stabilizer codes with (α, ε)-expander contracted Tanner graphs.

Lemma

Let T be the Tanner graph of a stabilizer code with length n and with r stabilizer generators. Let $\bar{T}$ be its contracted Tanner graph. Then, for all $\varepsilon \in [0, 1]$, we have

$$h_{\varepsilon'}(\bar{T}) \geq \frac{h_\varepsilon(T)}{\deg(T)}$$

where

$$\varepsilon' = \left(1 + \frac{r}{n}\right) \frac{\varepsilon}{1 + \deg(T)}.$$

- Show that

$$|\partial_{\bar{T}} L| \geq \frac{|\partial_T (L \cup N_T(L))|}{\deg(T)}.$$

- Show that

$$\left|\partial_{\bar{T}} L\right| \geq \frac{\left|\partial_T (L \cup N_T(L))\right|}{\deg(T)}.$$

- If

$$\left|L \cup N_T(L)\right| \leq \varepsilon \frac{V(T)}{2},$$

then

$$\left|\partial_T (L \cup N_T(L))\right| \geq h_\varepsilon(T) \left|L \cup N_T(L)\right| \geq h_\varepsilon(T) \left|L\right|.$$

- Show that

$$|\partial_{\bar{T}} L| \geq \frac{|\partial_T (L \cup N_T(L))|}{\deg(T)}.$$

- If

$$|L \cup N_T(L)| \leq \varepsilon \frac{V(T)}{2},$$

then

$$|\partial_T (L \cup N_T(L))| \geq h_\varepsilon(T) \, |L \cup N_T(L)| \geq h_\varepsilon(T) \, |L| \, .$$

- Combine the two

$$\frac{|\partial_{\bar{T}} L|}{|L|} \geq \frac{h_\varepsilon(T)}{\deg(T)}.$$

$$|\partial_{\bar{T}} L| \deg(T) \geq |\partial_T (L \cup N_T(L))|$$

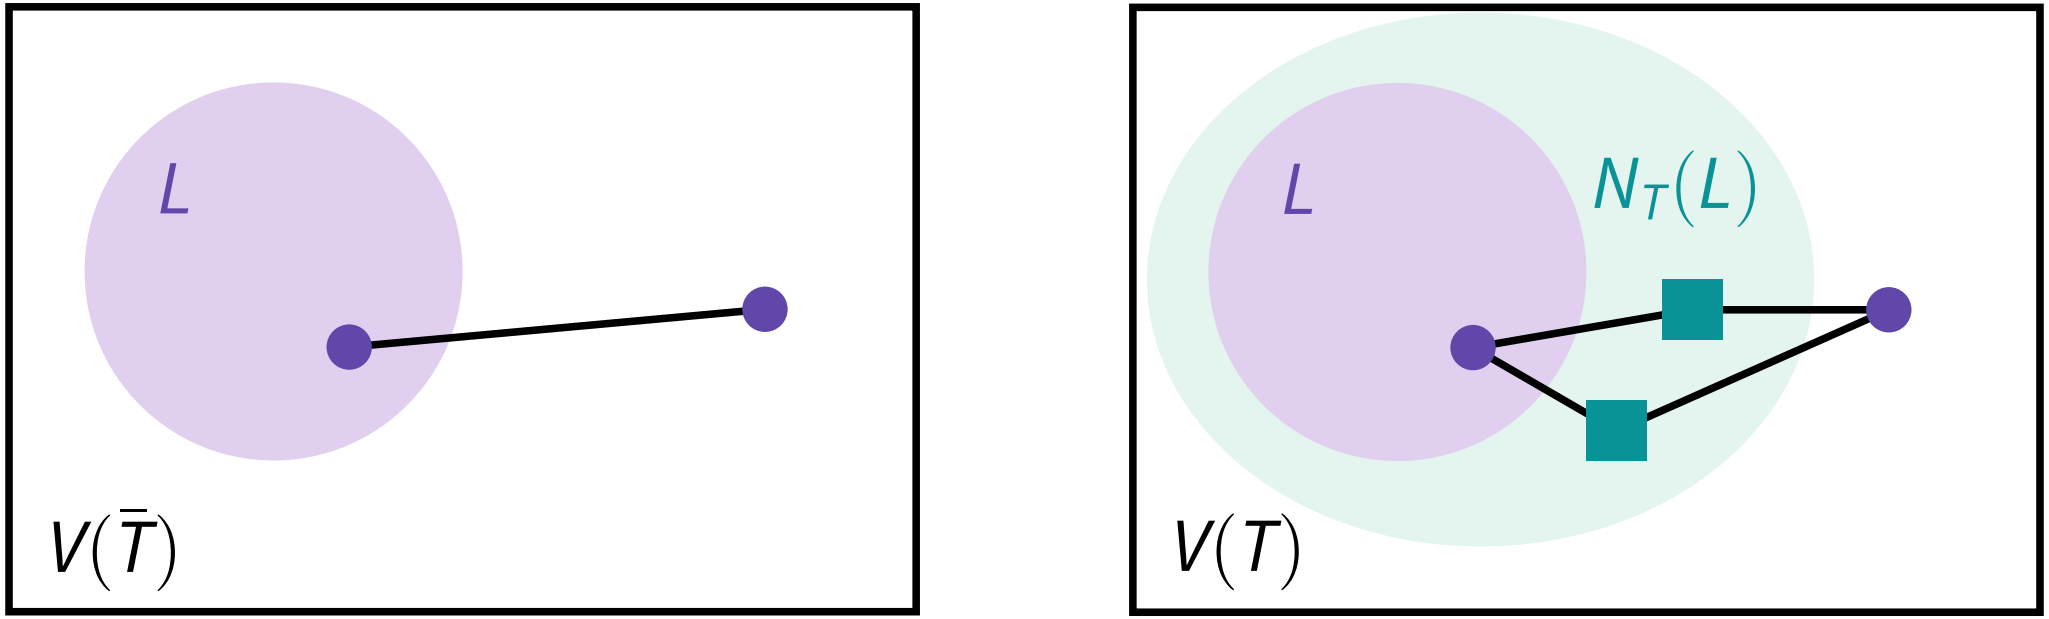

Review

- (Local) Clifford circuits
- Connectivity graphs
- Stabilizer codes and LDPC codes
- Pauli measurement circuits
- (Contracted) Tanner graphs
- Expander codes

Proof of the main theorem

Theorem

Let C be a Clifford circuit measuring computing Pauli operators $S_1, \ldots, S_r$. Then, for any subset of qubits L, we have

$$depth(C) \geq \frac{n_{cut}}{64|\partial L|}.$$

Corollary

For families of local-expander quantum LDPC codes of length n, a syndrome extraction circuit C implemented as a local Clifford circuit on a $\sqrt{N} \times \sqrt{N}$ grid of qubits satisfies

$$depth(C) \geq \Omega\left(\frac{n}{\sqrt{N}}\right).$$

Strategy

- Partition the circuit's qubits into two subsets L and R.

Strategy

- Partition the circuit's qubits into two subsets L and R.
- Lower bound the amount of correlation required between L and R to measure the Pauli operators.

Strategy

- Partition the circuit's qubits into two subsets L and R.
- Lower bound the amount of correlation required between L and R to measure the Pauli operators.
- Upper bound the amount of correlation introduced per operation.

Strategy

- Partition the circuit's qubits into two subsets L and R.
- Lower bound the amount of correlation required between L and R to measure the Pauli operators.
- Upper bound the amount of correlation introduced per operation.
- Combine both arguments to derive a lower bound for the depth of the circuit.

Measuring correlations

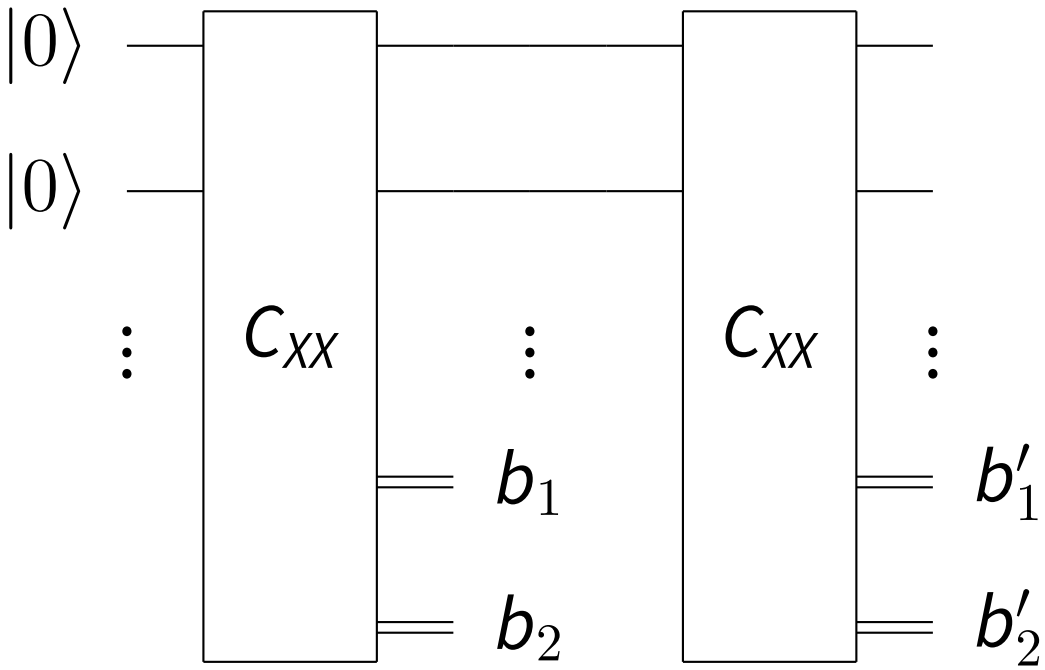

Measuring correlations

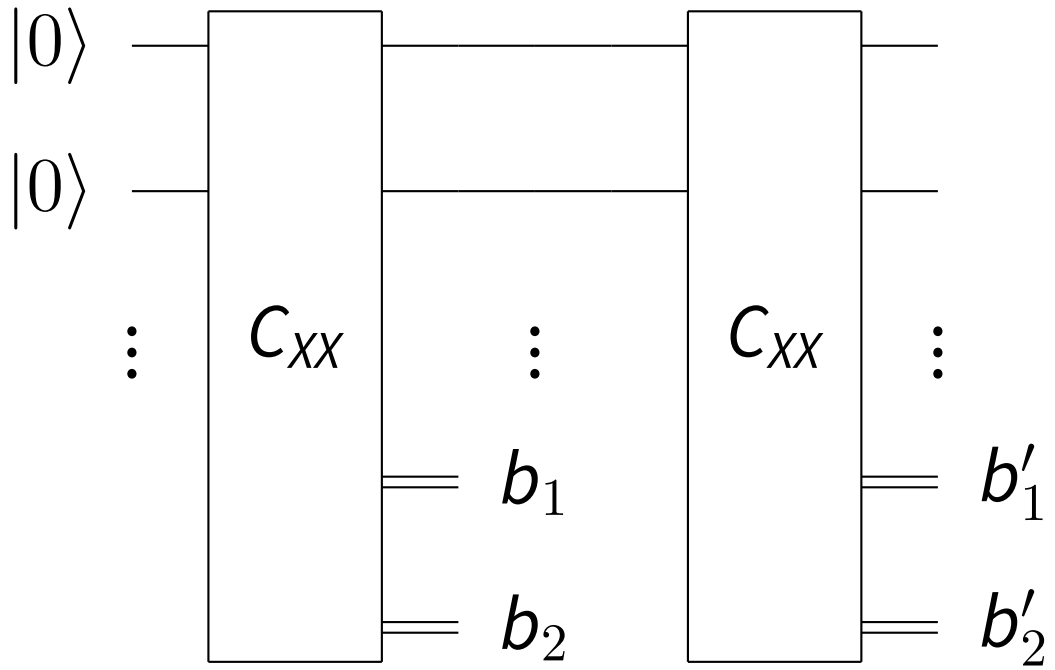

Mutual information

$$I(b_1; b_2) = 0$$

Measuring correlations

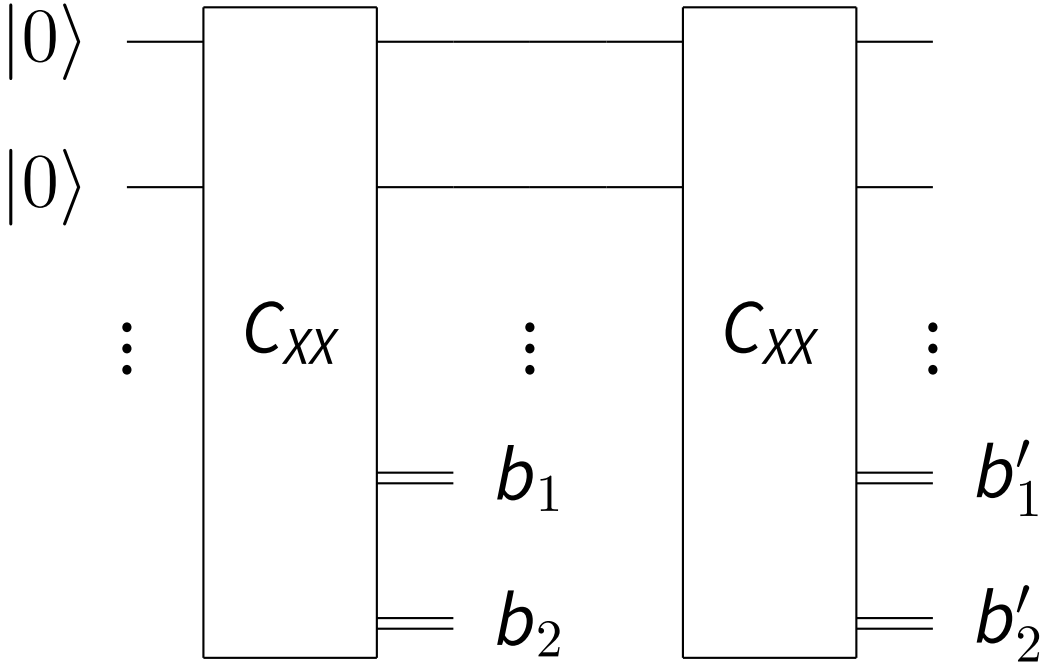

Mutual information

$$I(b_1; b_2) = 0$$

$$I(b'_1; b'_2) = 1$$

Measuring correlations

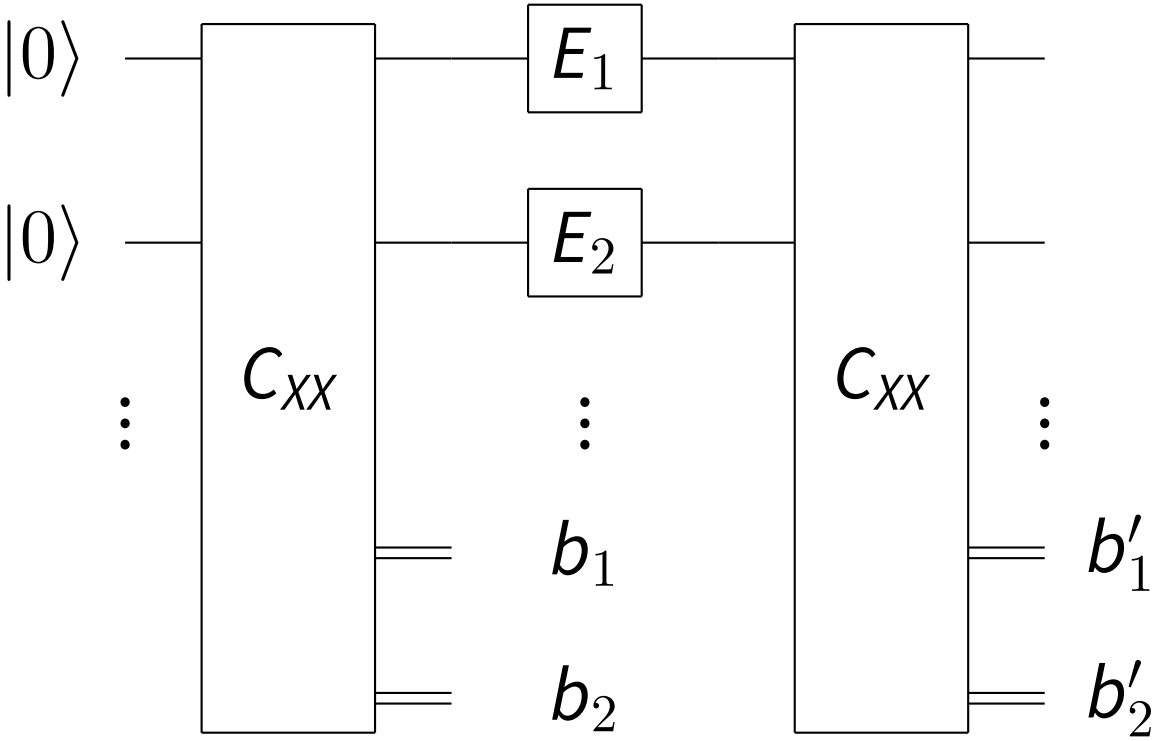

Mutual information

$$I(b'_1, b'_2, E_1; E_2) = 1$$

Measuring correlations



Measuring correlations



Classical operations can artificially boost mutual information.

Measuring correlations

- Build a circuit C' with the same action and similar depth as C by pushing all measurements and classical operations at the end.

Measuring correlations

- Build a circuit C' with the same action and similar depth as C by pushing all measurements and classical operations at the end.
- Consider the circuit $C' \circ E \circ C'$.

Measuring correlations

- Build a circuit C' with the same action and similar depth as C by pushing all measurements and classical operations at the end.
- Consider the circuit $C' \circ E \circ C'$.
- Compute the mutual information

$$I(O_L^{(2)}, E_L; O_R^{(2)}, E_R | O^{(1)}).$$

Circuit transformations

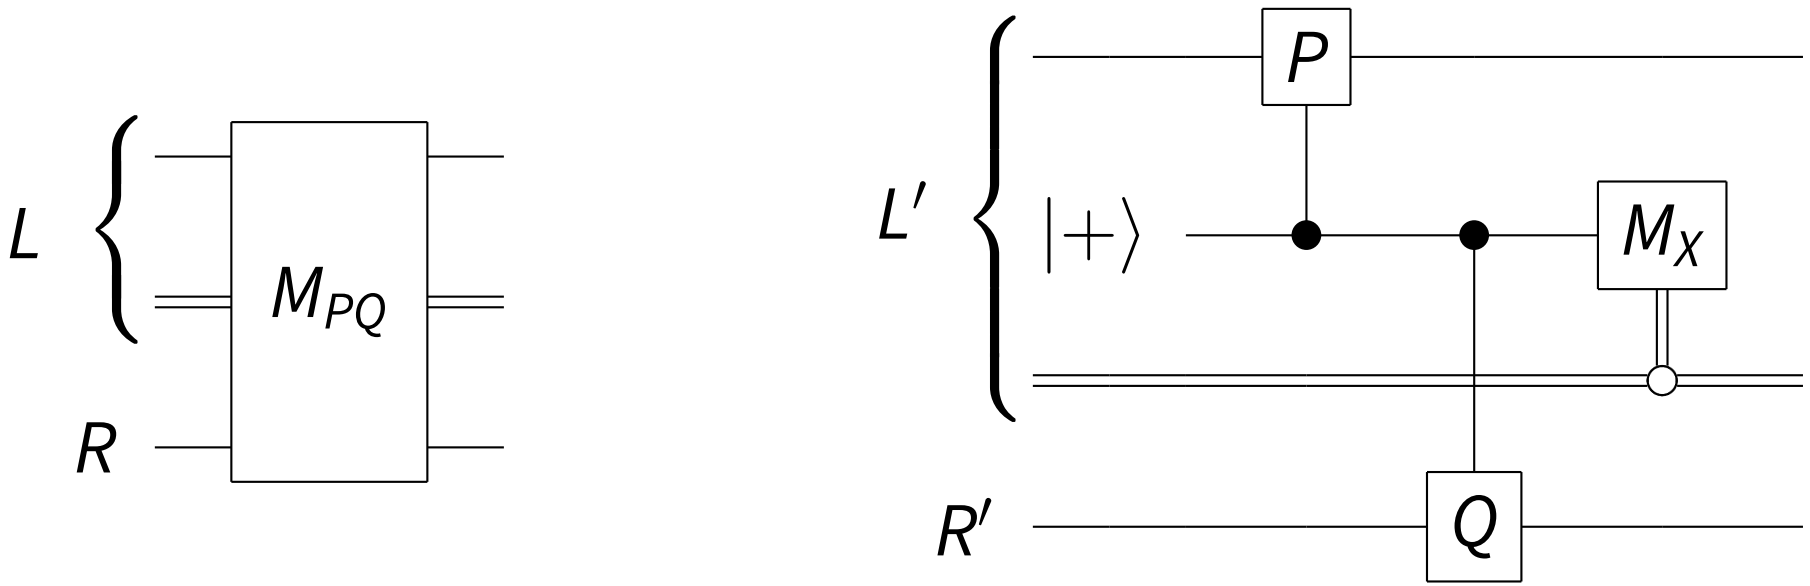

$$\mathrm{depth}(C') \leq 4 \cdot \mathrm{depth}(C) + 2$$

Circuit transformations

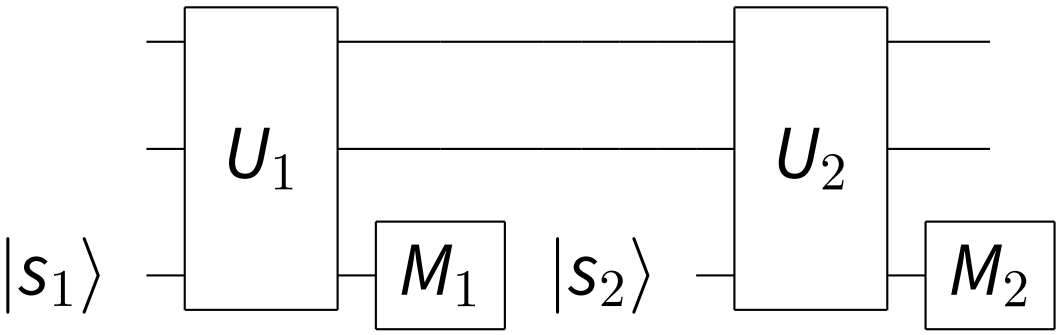

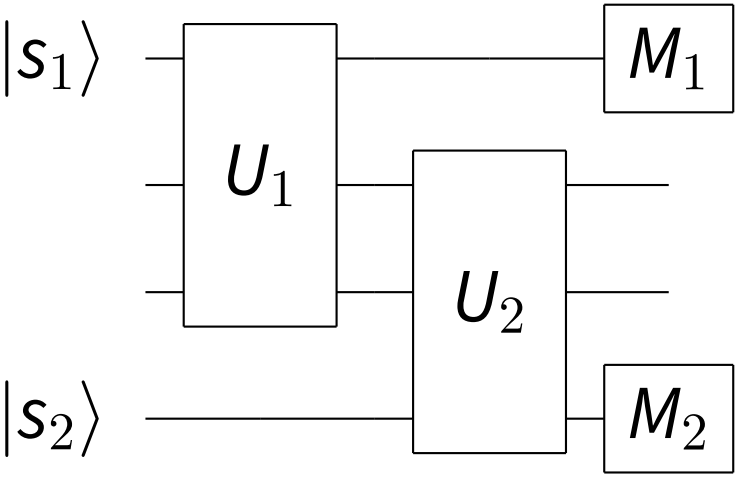

Circuit transformations

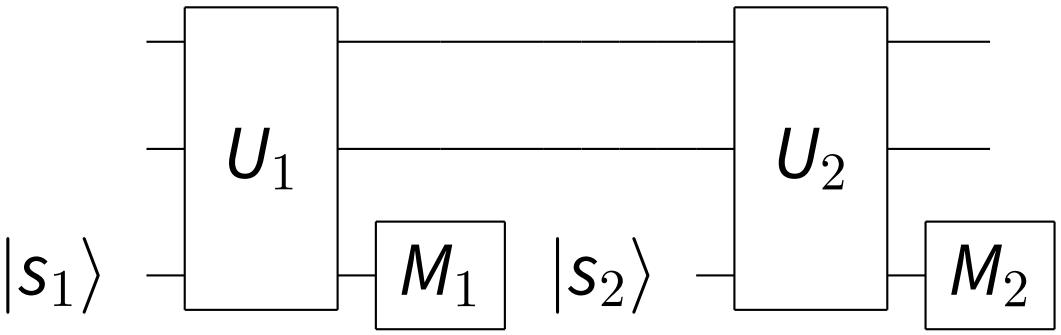

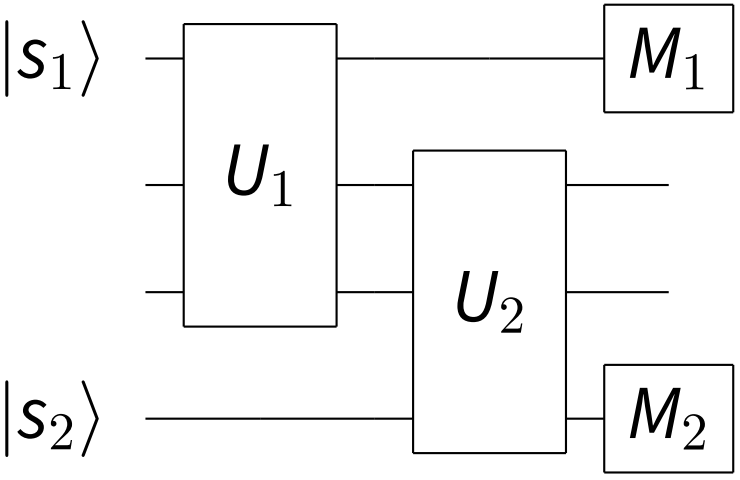

Both ancillas are the same node in the connectivity graph and in the same partition.

Circuit transformations





Circuit transformations









Circuit transformations













Circuit transformations

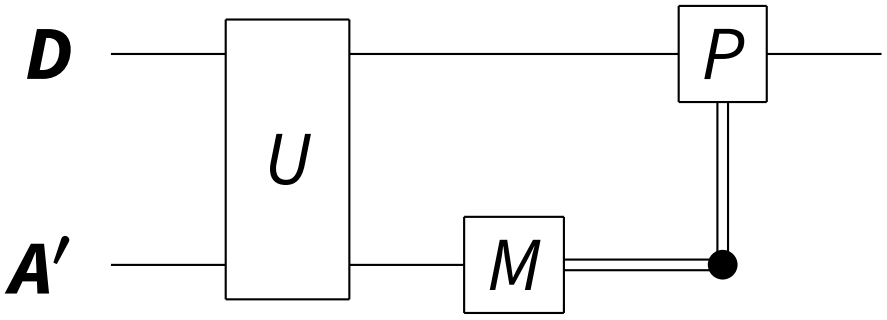

Circuit transformations

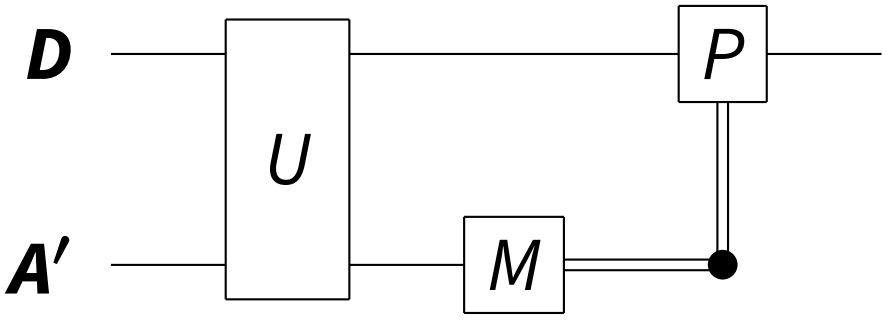

$$\mathrm{depth}(U) \leq 4 \cdot \mathrm{depth}(C)$$

Circuit transformations

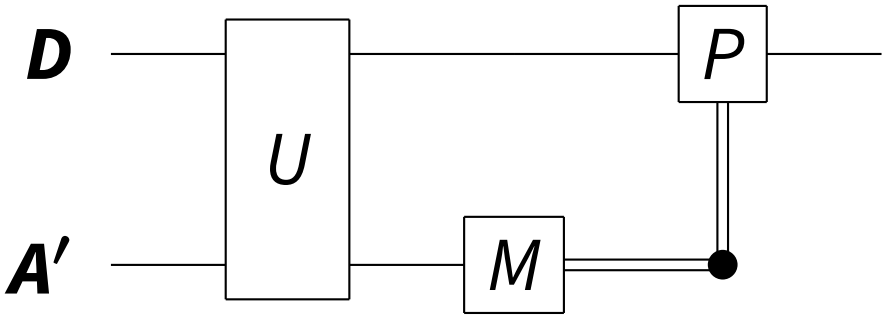

$$\mathsf{depth}(U) \leq 4 \cdot \mathsf{depth}(C)$$

$$|\partial L| = |\partial L'|$$

The double measurement circuit

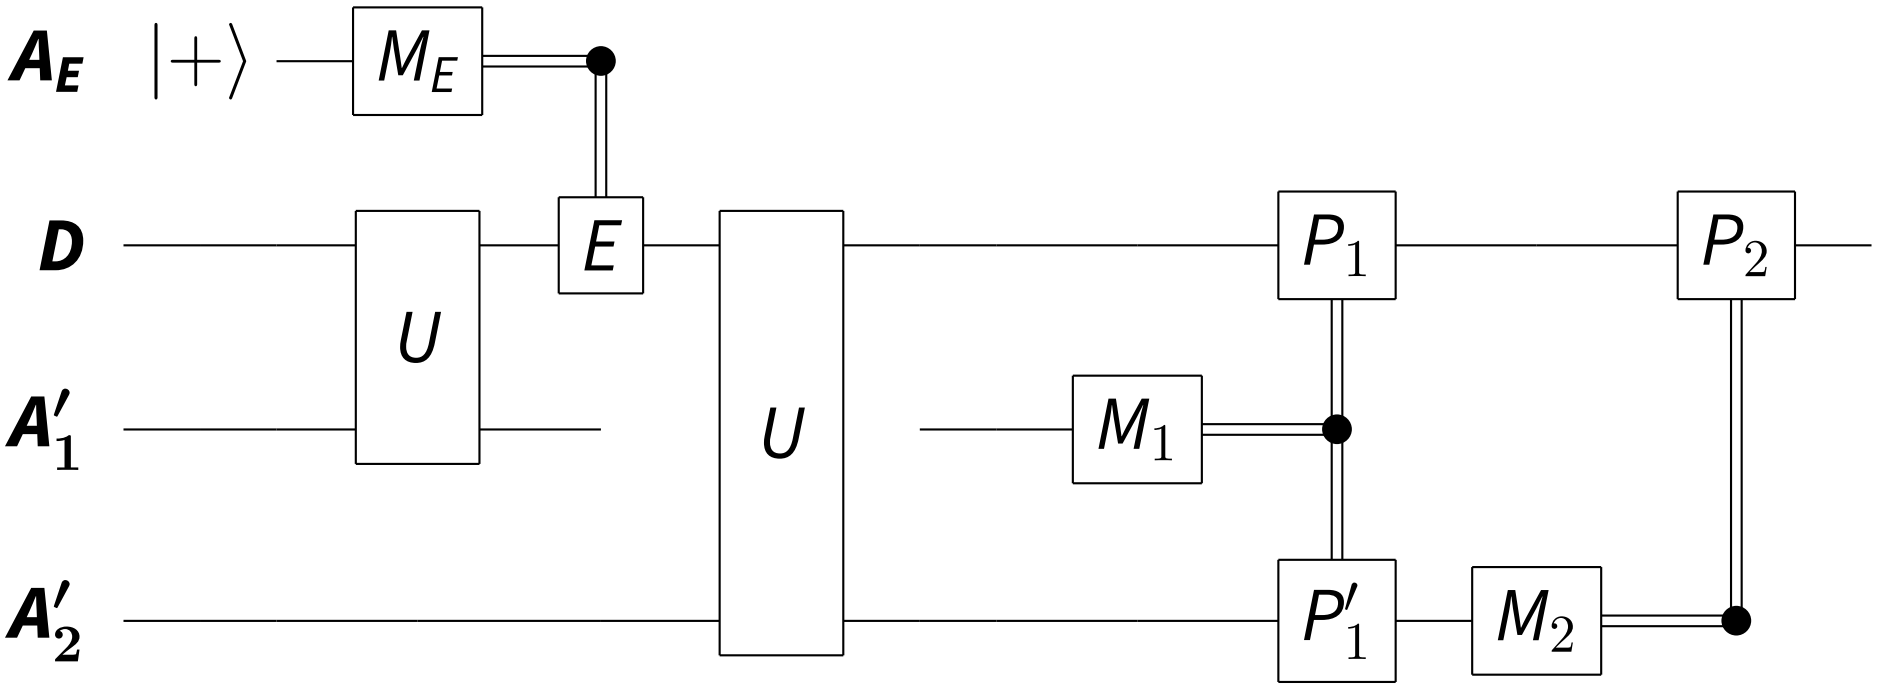

$$I(O_{\bar{L}}^{(2)}, E_{\bar{L}}; O_{\bar{R}}^{(2)}, E_{\bar{R}} | O^{(1)}) \text{ with } \bar{L} = L' \cup A_E$$