

# AtlasMap Documentation

The AtlasMap Team

Version 1.34-SNAPSHOT, 2018-04-10


# AtlasMap

1. Introduction .....	1
2. Developer Quickstart .....	4
2.1. Running Data Mapper UI within Syndesis .....	4
2.2. Running AtlasMap standalone .....	4
2.3. Running AtlasMap full build .....	4
2.4. Tips for UI developers .....	5
2.4.1. Developing Within Syndesis UI .....	5
2.4.2. Debug Configuration .....	6
3. camel-atlasmap component .....	9
4. Internal Design .....	10
4.1. Runtime .....	10
4.2. UI .....	10
4.2.1. BOOTSTRAPPING .....	10
4.2.2. MODEL .....	10
4.2.3. SERVICE .....	10
5. Reference .....	11
5.1. Transformations .....	11
5.2. Terminology .....	20

# Chapter 1. Introduction

The AtlasMap is a data mapping solution with interactive web based user interface, that simplifies configuring integrations between Java, XML, and JSON data sources. You can design your data mapping on the AtlasMap Data Mapper UI canvas, and then run that data mapping via runtime engine. AtlasMap Data Mapper UI is primarily designed to work within the [Syndesis UI](#).

In addition to the plain Java API provided by the runtime engine, AtlasMap also provides [camel-atlasmap Component](#) to perform data mapping as a part of [Apache Camel](#) route.

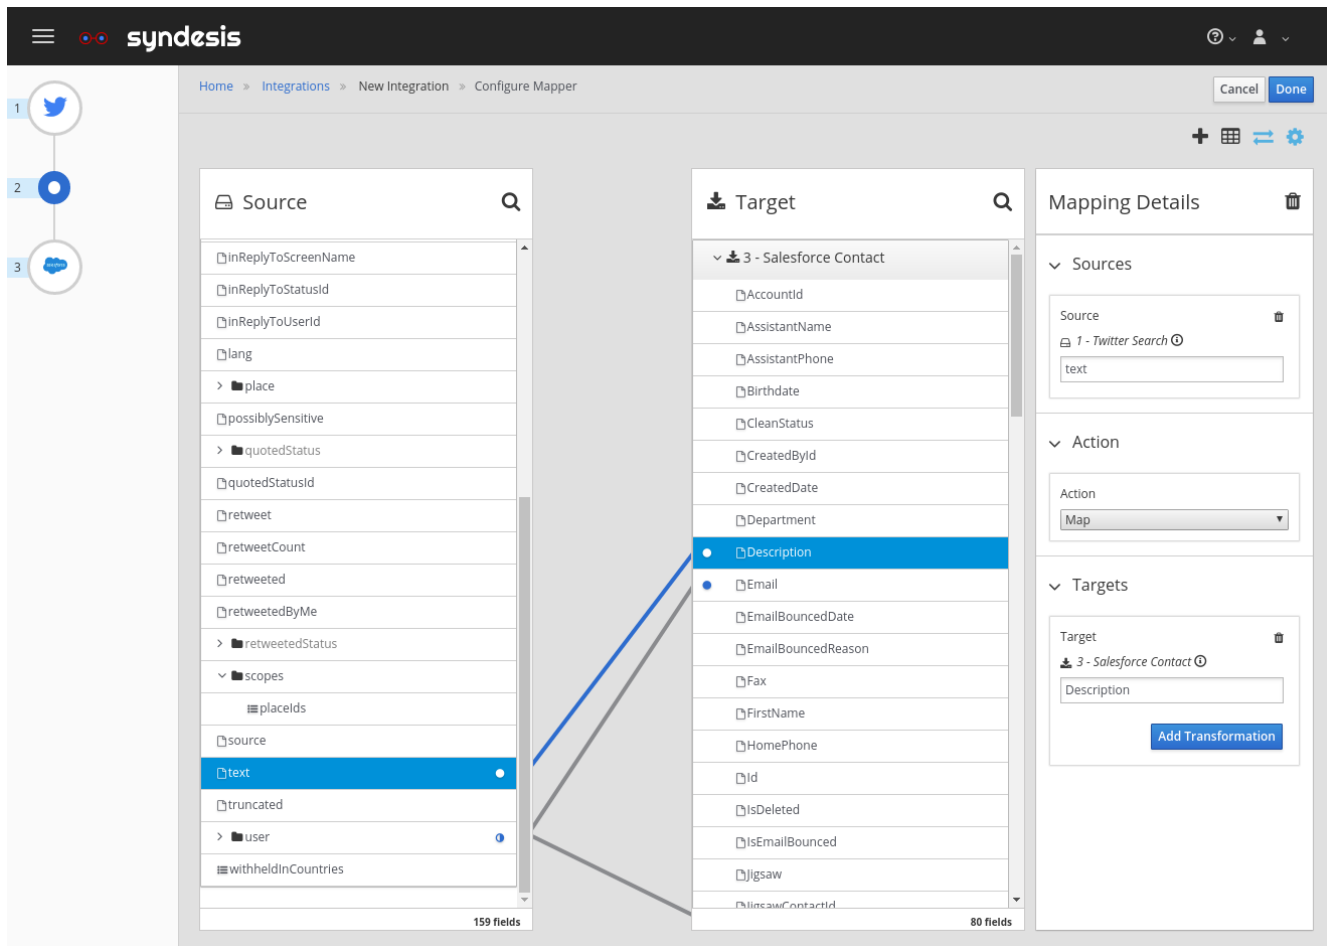

Configure Mapper

CancelDone

+

Grid

↔

⚙

Target

3 - Salesforce Contact

AccountId

AssistantName

AssistantPhone

Birthdate

CleanStatus

CreatedById

CreatedDate

Department

Description

Email

EmailBouncedDate

EmailBouncedReason

Fax

FirstName

HomePhone

Id

IsDeleted

IsEmailBounced

Jigsaw

OnlineContactId

159 fields

80 fields

Mapping Details

Sources

Source

1 - Twitter Search

text

Action

Action

Map

Targets

Target

3 - Salesforce Contact

Description

Add Transformation

2

1

2

3

syndesis

?

Home » Integrations » New Integration » Configure Mapper

Cancel

Done

Mappings

Sources	Targets	Type
/user/screenName	/TwitterScreenName_c	Map
/text	/Description	Map
/user/email	/Email	Map

3 mappings

Mapping Details

Sources

Source

1 - Twitter Search

text

Action

Action

Map

Targets

Target

3 - Salesforce Contact

Description

Add Transformation

3

# Chapter 2. Developer Quickstart

## 2.1. Running Data Mapper UI within Syndesis

The easiest way to install and run the Data Mapper UI is to install and run the [Syndesis](#). Simply follow the [Syndesis Developer Handbook](#) to install, and run the Syndesis UI. You will find the Data Mapper UI under the integrations panel after selecting or adding an integration with a data mapping step involved in the integration.

## 2.2. Running AtlasMap standalone

Here is the shortest path to run standalone AtlasMap.

### 1. Build AtlasMap runtime

```
cd ${ATLASMAP}/runtime
../mvnw clean install
```

### 2. Run AtlasMap Services

```
cd ${ATLASMAP}/runtime/runtime
../../mvnw -Pitests spring-boot:run
```

### 3. [Install Yarn](#)

### 4. In another console, install Data Mapper UI's dependencies

```
cd ${ATLASMAP}/ui
yarn install
```

### 5. Start Data Mapper UI

```
yarn start
```

The **yarn start** command will attempt to automatically open your browser window, but if it doesn't, open it directly with this URL: <http://localhost:3000>.

## 2.3. Running AtlasMap full build

- Building everything for standalone usage

```
./build.sh --skip-image-builds
```

To see all the available options:

```
./build.sh --help
```

- Resume from module

To resume from a particular module:

```
./build.sh --skip-image-builds --resume-from ui
```

- Using the image streams (in case you want to build a docker image for design runtime)

To build everything using image streams (instead of directly talking to docker):

```
./build.sh --with-image-streams
```

Note that this assumes that you are using a template flavor that also supports image streams.

## 2.4. Tips for UI developers

### 2.4.1. Developing Within Syndesis UI

The Data Mapper UI is referenced by Syndesis as a dependency. When the Syndesis UI's dependencies are installed during the **yarn install** step, the Data Mapper UI will be cloned from the NPM package repository into the `${SYNDESI}/ui/node_modules/@atlasmap/atlasmap.data.mapper` directory.

You can point your local Syndesis UI's Data Mapper UI reference to your working copy of the Data Mapper by [yarn link](#). You'll do something like this:

```
$ cd ${ATLASMAP}/ui
$ yarn build
$ cd dist
$ yarn link
$ cd ${SYNDESI}/ui
$ yarn link @atlasmap/atlasmap.data.mapper
```

Note that running **yarn install** in the Syndesis UI directory **will remove and redownload the `${SYNDESI}/ui/node_modules/@atlasmap/atlasmap.data.mapper` directory**, so you'd want to avoid doing it while you have **yarn link**. Instead you'd change `${ATLASMAP}/ui/src` and run **yarn build** to make a change in AtlasMap UI and consume it within Syndesis UI.

## 2.4.2. Debug Configuration

The Data Mapper UI features several developer-friendly debug configuration options. These configuration fields are specified on the [ConfigModel](#) class.

### Service Endpoint Configuration

1. **baseJavaInspectionServiceUrl** - URL for the Java Inspection Service provided by the AtlasMap Services.
2. **baseXMLInspectionServiceUrl** - URL for the XML Inspection Service provided by the AtlasMap Services.
3. **baseJSONInspectionServiceUrl** - URL for the JSON Inspection Service provided by the AtlasMap Services.
4. **baseMappingServiceUrl** - URL for the Mapping Service provided by the AtlasMap Services.

### Mock Source/Target Document Configuration

These flags control the UI automatically adding the specified mock documents to the system when the UI initializes.

1. **addMockJavaSingleSource** - Add single Java source document.
2. **addMockJavaSources** - Add multiple Java source documents.
3. **addMockXMLInstanceSources** - Add multiple XML instance-based source documents.
4. **addMockXMLSchemaSources** - Add multiple XML schema-based source documents.
5. **addMockJSONSources** - Add multiple JSON source documents.
6. **addMockJavaTarget** - Add a Java target document.
7. **addMockXMLInstanceTarget** - Add a XML instance target document.
8. **addMockXMLSchemaTarget** - Add a XML schema target document.
9. **addMockJSONTarget** - Add a JSON target document.

The code that initializes these mock documents is in the [InitializationService](#). That service calls various static methods in the [DocumentManagementService](#) to create example XML instance, XML schema, and JSON documents. Mock Java documents referenced are from the AtlasMap Services' [Atlas Java Test Model Maven Module](#).

### Additional Debug Configuration

1. **discardNonMockSources** - Automatically discard all user-specified (or Syndesis UI-specified) source/target documents before initializing. This is helpful if you're trying to test with mock documents alone.
2. **addMockJSONMappings** - This flag bootstraps the UI's mappings from the provided JSON mapping definition. Useful for repeatedly debugging a particular scenario.
3. **debugClassPathServiceCalls** - Log details about JSON request/responses to/from the class path resolution service.



4. **debugDocumentServiceCalls** - Log details about JSON request/responses to/from the Java/XML/JSON inspection services.
5. **debugMappingServiceCalls** - Log details about JSON request/responses to/from the mapping service.
6. **debugValidationServiceCalls** - Log details about JSON request/responses to/from the mapping validation service.
7. **debugFieldActionServiceCalls** - Log details about JSON request/responses to/from the mapping field action configuration service.
8. **debugDocumentParsing** - Log details about parsing JSON responses from the inspection services.

Data Mapper Debug Configuration within the Synthesis UI is defined within your **\${SYNDEISIS}/ui/src/config.json** file's data mapper section:

```

{
  "apiEndpoint": "https://syndesis-staging.b6ff.rh-idev.openshiftapps.com/api/v1",
  "title": "Syndesis",
  "datamapper": {
    "baseJavaInspectionServiceUrl": "http://localhost:8585/v2/atlas/java/",
    "baseXMLInspectionServiceUrl": "http://localhost:8585/v2/atlas/xml/",
    "baseJSONInspectionServiceUrl": "http://localhost:8585/v2/atlas/json/",
    "baseMappingServiceUrl": "http://localhost:8585/v2/atlas/",
    "discardNonMockSources": true,
    "addMockJSONMappings": false,
    "addMockJavaSingleSource": true,
    "addMockJavaSources": false,
    "addMockXMLInstanceSources": true,
    "addMockXMLSchemaSources": true,
    "addMockJSONSources": true,
    "addMockJavaTarget": false,
    "addMockXMLInstanceTarget": false,
    "addMockXMLSchemaTarget": false,
    "addMockJSONTarget": true,
    "debugDocumentServiceCalls": true,
    "debugMappingServiceCalls": true,
    "debugClassPathServiceCalls": false,
    "debugValidationServiceCalls": false,
    "debugFieldActionServiceCalls": false,
    "debugDocumentParsing": false
  },
  "oauth": {
    "clientId": "syndesis-ui",
    "scopes": ["openid"],
    "oidc": true,
    "hybrid": true,
    "issuer": "https://syndesis-staging.b6ff.rh-idev.openshiftapps.com/auth/realms/syndesis",
    "auto-link-github": true
  }
}

```

If you're running the Data Mapper UI locally outside of the Syndesis UI, the debug configuration is specified within the [DataMapperAppExampleHostComponent](#).

# Chapter 3. camel-atlasmap component

camel-atlasmap is an [Apache Camel](#) Component for AtlasMap. This component executes AtlasMap mapping as a part of Camel route processing.

Example usage:

```
<camelContext xmlns="http://camel.apache.org/schema/spring">
  <route>
    <from uri="direct:start" />
    <to uri="atlas:atlasmapping.xml" />
    <to uri="mock:result" />
  </route>
</camelContext>
```

# Chapter 4. Internal Design

## 4.1. Runtime

TBD

## 4.2. UI

### 4.2.1. BOOTSTRAPPING

Bootstrapping the Data Mapper UI requires a bit of configuration. An example bootstrapping component is provided within the project:

`ui/src/app/lib/atlasmap-data-mapper/components/data.mapper.example.host.component.ts`

### 4.2.2. MODEL

All application data and configuration is stored in a centralized ConfigModel object.

The ConfigModel contains:

- initialization data such as service URLs and source/target document information
- references to our angular2 services that manage retrieving and saving our documents and mapping data
- document / mapping model objects

There are two document models contained within the ConfigModel object, both of type DocumentDefinition. A DocumentDefinition contains information about a source or target document such as the document's name, and fields for that document. Fields are represented by our Field model.

A single MappingDefinition model in the ConfigModel object stores information about field mappings and related lookup tables. Individual mappings are represented in instances of MappingModel, and lookup tables are represented by the LookupTable model.

### 4.2.3. SERVICE

When the Data Mapper UI Bootstraps, a series of service calls are made to the mapping service (MappingManagementService) and document service (DocumentManagementService).

The document service is used to fetch our source/target document information (name of doc, fields). After these are parsed from the service, they are stored in the ConfigModel's inputDoc and outputDoc DocumentDefinition models.

The mapping service is used to fetch our mappings for the fields mapped from the source to the target document. These mappings (and related lookup tables) are parsed by the management service and stored in the ConfigModel's mappings MappingDefinition model.

# Chapter 5. Reference

## 5.1. Transformations

Transformations are a set of functions you can apply onto a field as a part of mapping. These performs a variety of transformations in the middle of processing mappings. This is called FieldAction internally.

Field Action	Input Type	Output Type	Parameter(s) (*=required)	Description
AbsoluteValue	Number	Number	n/a	Return the absolute value of a number.
Add	Collection/Array/Map	Number	n/a	Add the numbers in a collection, array, or map's values.
AddDays	Date	Date	days	Add days to a date. The default days is 0.
AddSeconds	Date	Date	seconds	Add seconds to a date. The default seconds is 0.
Append	String	String	string	Append a string to the end of a string. The default is to append nothing.
Average	Collection/Array/Map	Number	n/a	Return the average of the numbers in a collection, array, or map's values.

Field Action	Input Type	Output Type	Parameter(s) (* = required)	Description
Camelize	String	String	n/a	Convert a phrase to a camelized string by: Removing whitespace Making the first word lowercase Capitalizing the first letter of each subsequent word
Capitalize	String	String	n/a	Capitalize the first character of a string.
Ceiling	Number	Number	n/a	Return the whole number ceiling of a number.
Concatenate	Collection/Array/Map	String	delimiter	Concatenate a collection, array, or map's values, separating each entry by the delimiter if supplied.
Contains	Any	Boolean	value	Return true if a field contains the supplied value.
ConvertAreaUnit	Number	Number	fromUnit *toUnit *	Convert a number representing an area to another unit. The fromUnit and toUnit parameters can be one of the following: Square FootSquare MeterSquare Mile

Field Action	Input Type	Output Type	Parameter(s) (* = required)	Description
ConvertDistanceUnit	Number	Number	fromUnit *toUnit *	Convert a number representing a distance to another unit. The fromUnit and toUnit parameters can be one of the following: FootInchMeter MileYard
ConvertMassUnit	Number	Number	fromUnit *toUnit *	Convert a number representing a mass to another unit. The fromUnit and toUnit parameters can be one of the following: KilogramPound
ConvertVolumeUnit	Number	Number	fromUnit *toUnit *	Convert a number representing a volume to another unit. The fromUnit and toUnit parameters can be one of the following: Cubic footCubic meterGallonLiter
CurrentDate	n/a	Date	n/a	Return the current date.
CurrentDateTime	n/a	Date	n/a	Return the current date/time.
CurrentTime	n/a	Date	n/a	Return the current time.

Field Action	Input Type	Output Type	Parameter(s) (*=required)	Description
DayOfWeek	Date	Number	n/a	Return the day of the week for a date, from 1 (Monday) to 7 (Sunday).
DayOfYear	Date	Number	n/a	Return the day of the year for a date, from 1 to 365 (or 366 in a leap year).
Divide	Collection/Array/Map	Number	n/a	Divide each entry in a collection, array, or map's values by its subsequent entry (A "normal" division would only involve 2 entries).
EndsWith	String	Boolean	string	Return true if a string ends with the supplied string (including case).
Equals	Any	Boolean	value	Return true if a field is equal to the supplied value (including case).
FileExtension	String	String	n/a	Retrieve the extension, without the dot ('.'), of a string representing a file name.
Floor	Number	Number	n/a	Return the whole number floor of a number.



Field Action	Input Type	Output Type	Parameter(s) (*=required)	Description
Format	Any	String	template *	Return a string that is the result of substituting a field's value within a template containing placeholders like %s, %d, etc., similar to mechanisms available in programming languages like Java and C.
GenerateUUID	n/a	String	n/a	Create a string representing a random UUID.
IndexOf	String	Number	string	Return the first index, starting at 0, of the supplied string within a string, or -1 if not found.
IsNull	Any	Boolean	n/a	Return true if a field is null.
LastIndexOf	String	Number	string	Return the last index, starting at 0, of the supplied string within a string, or -1 if not found.
Length	Any	Number	n/a	Return the length of the field, or -1 if null. For collections, arrays, and maps, this means the number of entries.

Field Action	Input Type	Output Type	Parameter(s) (* = required)	Description
Lowercase	String	String	n/a	Convert a string to lowercase.
Maximum	Collection/Array/Map	Number	n/a	Return the maximum number from the numbers in a collection, array, or map's values.
Minimum	Collection/Array/Map	Number	n/a	Return the minimum number from the numbers in a collection, array, or map's values.
Multiply	Collection/Array/Map	Number	n/a	Multiply the numbers in a collection, array, or map's values.
Normalize	String	String	n/a	Replace consecutive whitespace characters with a single space and trim leading and trailing whitespace from a string.
PadStringLeft	String	String	padCharacter *padCount *	Insert the supplied character to the beginning of a string the supplied count times.
PadStringRight	String	String	padCharacter *padCount *	Insert the supplied character to the end of a string the supplied count times.

Field Action	Input Type	Output Type	Parameter(s) (* = required)	Description
Prepend	String	String	string	Prepend a string to the beginning of a string. The default is to prepend nothing.
ReplaceAll	String	String	match *newString	Replace all occurrences of the supplied matching string in a string with the supplied newString. The default newString is an empty string.
ReplaceFirst	String	String	match *newString	Replace this first occurrence of the supplied matching string in a string with the supplied newString. The default newString is an empty string.
Round	Number	Number	n/a	Return the rounded whole number of a number.
SeparateByDash	String	String	n/a	Replace all occurrences of whitespace, colons (:), underscores (_), plus (+), or equals (=) with a dash (-) in a string.

Field Action	Input Type	Output Type	Parameter(s) (*=required)	Description
SeparateByUnder score	String	String	n/a	Replace all occurrences of whitespace, colon (:), dash (-), plus (+), or equals (=) with an underscores ( ) in a string.
StartsWith	String	Boolean	string	Return true if a string starts with the supplied string (including case).
Substring	String	String	startIndex *endIndex	Retrieve the segment of a string from the supplied inclusive startIndex to the supplied exclusive endIndex. Both indexes start at zero. The default endIndex is the length of the string.

Field Action	Input Type	Output Type	Parameter(s) (* = required)	Description
SubstringAfter	String	String	startIndex *endIndexmatch *	Retrieve the segment of a string after the supplied match string from the supplied inclusive startIndex to the supplied exclusive endIndex. Both indexes start at zero. The default endIndex is the length of the string after the supplied match string.
SubstringBefore	String	String	startIndex *endIndexmatch *	Retrieve the segment of a string before the supplied match string from the supplied inclusive startIndex to the supplied exclusive endIndex. Both indexes start at zero. The default endIndex is the length of the string before the supplied match string.

Field Action	Input Type	Output Type	Parameter(s) (*=required)	Description
Subtract	Collection/Array/Map	Number	n/a	Subtract each entry in a collection, array, or map's values from its previous entry (A "normal" subtraction would only involve 2 entries).
Trim	String	String	n/a	Trim leading and trailing whitespace from a string.
TrimLeft	String	String	n/a	Trim leading whitespace from a string.
TrimRight	String	String	n/a	Trim trailing whitespace from a string.
Uppercase	String	String	n/a	Convert a string to uppercase.

## 5.2. Terminology

AtlasMap terminology

Term	Definition	Example
AtlasMapping	The top-level mapping file containing the mapping instructions to execute at runtime	atlasmapping.xml, atlasmapping.json
Audit	An Audit is informational tracing data captured runtime execution in order to provide user feedback	Useful during testing cycles, or when user does not have direct access to the runtime logs
Collection	A data type used in conversion that repeats 0 or more times	Used to process Arrays and Lists
Data Source	The definition of an input or output data format within an AtlasMapping file	atlas:java, atlas:json, atlas:xml, etc
Field	The base type used to describe a data value used in a Mapping	JavaField, JsonField, XmlField, etc

Term	Definition	Example
Field Action	A function to perform on a given value of an input or output field	CurrentDate, Trim, SubString, etc
Field Type	Normalized convention to describe the type of data expected within the value of a field	String, Integer, Long, Number, Date Time, etc
Lookup Table	A cross reference table used at runtime to define a data conversion that varies based on the value of the input field	Used for mapping enumerations
Mapping	A grouping of input Field(s), output Field(s) and optionally Field Action(s) that defines the conversion to be performed at runtime within an AtlasMapping file	JavaField → JsonField, XmlField → JsonField + Uppercase, etc
Mapping Type	The specific type of conversion that should be performed at runtime	Map, Combine, Separate, Collection or Lookup
Validation	A Validation is a syntax check of a provide mapping file to ensure execution may proceed	Useful during testing cycles, and at runtime to avoid complicated and misleading exception stack traces

#### AtlasMap Data Format terminology

Term	Definition	Example
Boxed Primitive	A type of primitive that have a 'null' value	Integer, Long, Boolean, etc
(Unboxed) Primitive	A type of primitive that cannot be 'null' and generally has a default initialized value	int, long, boolean, etc
Rooted	JSON documents that have a parent node identifying to contents of the JSON document	{ "Contact": { "firstName": "Yu", "lastName": "Darvish" } }
Unrooted	JSON documents that do not have a parent node identifying the contents of the JSON document	{ "firstName": "Yu", "lastName": "Darvish" }
Qualified	Xml elements and/or attributes that contain the namespace prefix	<ns1:Contact ns1:firstName="Yu" ns1:lastName="Darvish" />
Unqualified	Xml elements and/or attributes that do not contain the namespace prefix	<Contact firstName="Yu" lastName="Darvish" />