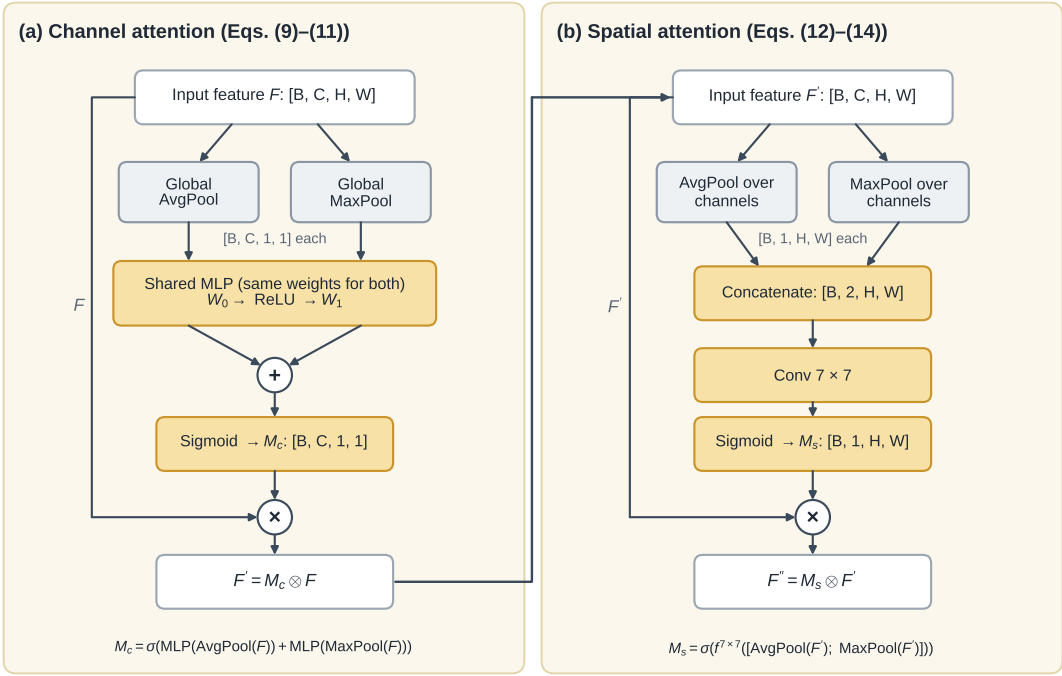
(a) Channel attention (Eqs. (9)–(11))
Input feature F: [B, C, H, W]
Global AvgPool
Global MaxPool
[B, C, 1, 1] each
Shared MLP (same weights for both)
W0 → ReLU → W1
F
+
Sigmoid → Mc: [B, C, 1, 1]
×
F′ = Mc ⊗ F
Mc = σ(MLP(AvgPool(F)) + MLP(MaxPool(F)))
(b) Spatial attention (Eqs. (12)–(14))
Input feature F′: [B, C, H, W]
AvgPool over channels
MaxPool over channels
[B, 1, H, W] each
F′
Concatenate: [B, 2, H, W]
Conv 7 × 7
Sigmoid → Ms: [B, 1, H, W]
×
F″ = Ms ⊗ F′
Ms = σ(f7×7([AvgPool(F′); MaxPool(F′)]))