

EgyBest Series Bot

Description:

This bot takes a series' links from the user, along with the required seasons and quality. Then creates a folder for each series that contains text files with the downloadable links of the episodes for each season (All of these folders are created in the following path: "C:\EgyBestBot").

Process type:

Attended (To be triggered by the user)

<u>Prerequisites to run the process:</u>


- 1 Microsoft Edge is installed and UiPath extension is installed on it.
- 2 The ad blocker MUST be disabled for egybest.

NOTE: there are many domains for egybest, e.g.(https://vega.egybest.pw/, https://fool.egybest.golf/, etc..) so you must disable the ad blocker on the required one.

Handling unknow errors:

Take a screenshot of the whole screen and save it in the "Exceptions Screenshots" folder.

Detailed process map:

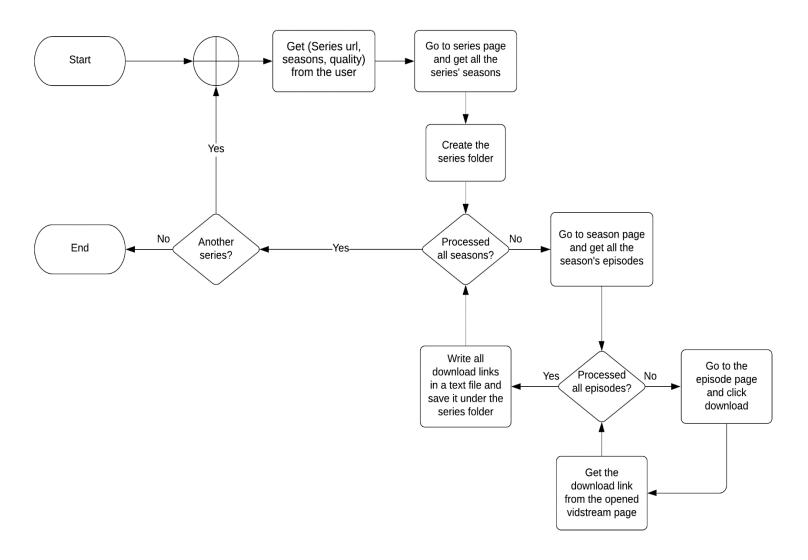

Process workflows:

| # | Workflow File Name | Description | Pre/Post conditions | Arguments |
|---|--------------------|---|--|--|
| 1 | InitAllSettings | Initialize, populate and output a configuration Dictionary to be used throughout the project. | Pre-condition: N/A | <pre>in_ConfigFilePath: String in_ConfigSheets: String[]</pre> |
| | | Settings and constants are read from the local configuration file, and assets are fetched from Orchestrator. Asset values overwrite settings and constant values if they are defined with the same name. | Post-condition: The output config dictionary contains the required configuration for the process. | out_Config: Dictionary <string, object=""></string,> |
| 2 | KillAllProcesses | Force the termination of the Windows processes representing applications used in the process being automated. | Pre-condition: N/A Post-condition: All the processes name in the passed array -if anyare terminated successfully. | in_Config: Dictionary <string, object=""></string,> |
| 3 | TakeScreenshot | Capture a screenshot, log its name and location and save it with the PNG extension. If no specific file path is passed as argument, it saves the image in the folder specified by in Folder. | Pre-condition: N/A Post-condition: Screenshot of the whole screen is taken and saved successfully. | in_Config: Dictionary <string, object=""> in_Folder: String Io_FilePath: String</string,> |

| 4 | EgyBest_GetSeriesInfo | Gets the following info from the user: (Series link, required seasons and required quality). Then scraps the required seasons and pass the information as output arguments. | Pre-condition: MSEdge is open. Post-condition: Output arguments are in a correct format. | <pre>in_Config: Dictionary<string, object=""> out_SeriesName: Sting out_ReqQuality: String</string,></pre> |
|---|------------------------|--|---|--|
| | | | | out_SeasonsDT: DataTable |
| 5 | EgyBest_ProcessSeries | Process each required season in the current series. Then save the downloadable links in the current series folder. | Pre-condition: The passed seasons data table and the name of the series are not empty. | in_SeriesName: Sting in_ReqQuality: String |
| | | | Post-condition: | in_SeasonsDT: DataTable |
| | | | All the required seasons in the current series are processed successfully. | in_Config: Dictionary <string, object=""></string,> |
| 6 | EgyBest_ProcessSeason | Process each episode in the current season. Then | Pre-condition: | in_SeasonURL: String |
| | | pass the downloadable links as an output. | The passed season URL is correct. | in_ReqQuality: String |
| | | | Post-condition: All the episodes in the current season are processed successfully. | in_Config: Dictionary <string, object=""></string,> |
| | | | , | out_SeasonDownloadLink s: String |
| 7 | EgyBest_ProcessEpisode | Navigates to the episode page, get the episode download link of the required quality (if the required quality doesn't exist, the highest available | Pre-condition: | in_EpisodeURL: String |
| | | | The passed episode URL is correct. | in_ReqQuality: String |

| | quality will be selected) | Post-condition: The episode download link is successfully | in_Config: Dictionary <string, object=""> out_EpisodeDownloadLin k: String</string,> |
|--|---------------------------|--|---|
| | | extracted. | |