

МУҲАММАД АЛ-ХОРАЗМӢЙ НОМИДАГИ ТОШКЕНТ АХБОРОТ ТЕХНОЛОГИЯЛАРИ УНИВЕРСИТЕТИ

Мултимедиа технологиялари кафедраси

Angular JS га кириш. Анимация ва формалар
билан ишлаш

@UniversalstudyTUIT

Режа:

1. AngularJS га кириш
2. AngularJS дан фойдаланиш усуллари
3. AngularJS да директивалар
4. AngularJS да биринчи дастур
5. AngularJS да ифодалар
6. AngularJS да модуллар





AngularJS га кириш

AngularJS – очик кодли, фойдаланиш текин бўлган JavaScript фреймворк ҳисобланади

AngularJS 1.0 версияси 2012 йилда чиқарилган.

AngularJS ни яратиш билан Google компанияси ходими Мишко Хевери 2009 йилда иш бошлаган.

AngularJS лойиҳаси ҳозирда Google компанияси томонидан қўллаб-қуватланиб келинади.



AngularJS га кириш

AngularJS дан фойдаланиш бўйича йўриқномалари яхши ёзилган.

AngularJS - Single Page Application(SPA) лойиҳаларда кенг қўлланилади

AngularJS - HTML DOM ни қўшимча атрибутлар билан кенгайтиради ва фойдаланувчи ҳаракатларини янада сезгир қилади

AngularJS дан фойдаланиш усуллари



<https://angularjs.org/> сайтидан **AngularJS** кутубхонасини юклаб олиш;

- `<head>`
 `<script src="angular.min.js"></script>`
 `</head>`

Googленинг CDN (Content Delivery Network) идан **AngularJS** кутубхонасини кўрсатиш

- `<head>`
 `<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>`
 `</head>`

A screenshot of the 'Download AngularJS' form. It has a title bar with a close button. The form contains several sections: 'Branch' with buttons for '1.7.x (latest)' and '1.2.x (legacy)'; 'Build' with buttons for 'Minified', 'Uncompressed', and 'Zip'; 'CDN' with a text input field containing 'https://ajax.googleapis.com/ajax/libs/angularjs/1.7.9/angular.min.js'; 'Bower' with a text input field containing 'bower install angular#1.7.9'; 'npm' with a text input field containing 'npm install angular@1.7.9'; and 'Extras' with a link 'Browse additional modules'. At the bottom, there is a 'Previous Versions' link and a blue 'Download' button with a download icon.



AngularJS да директивалар

AngularJS - HTMLни директивалар деб номланган янги атрибутлар орқали кенгайтиришга имкон беради

AngularJS кутубхонасида дастурда фойдаланиш учун тайёр директивалар мавжуд

AngularJS да янги директива эълон қилиб фойдаланиш мумкин



AngularJS да асосий директивалар

ng-app: Ушбу директива AngularJS ва HTML ни боғлайди

ng-model: Ушбу директива AngularJS ва HTML киритиш элементларини (input, select, textarea) боғлайди

ng-bind: Ушбу директива AngularJS даги дастур маълумотларини HTML теглари билан боғлайди



AngularJS да биринчи иловани яратиш

1-қадам

- *Фреймворкни улаш:*
- `<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>`

2-қадам

- *AngularJS иловаси учун ng-app директивани белгилаш:*
- `<div ng-app="">...</div>`

3-қадам

- *Ng-model директиваси орқали модел номини аниқлаш:*
- `<p>Enter your Name: <input type="text" ng-model="name"></p>`

4-қадам

- *ng-bind директиваси орқали юқоридаги model қийматини боғлаш:*
- `<p>Hello <span ng-bind="name"></span>!</p>`

AngularJS да биринчи иловани яратиш



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body>

<div ng-app="">

  <p>Enter your Name: <input type="text" ng-model="name"></p>
  <p>Hello <span ng-bind="name"></span>!</p>
</div>
</body>
</html>
```

Enter your Name:

Hello !

Enter your Name:

Hello TUIT!



AngularJS да директивалар: ng-repeat

```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js">
</script>
<body>

<div ng-app="" ng-init="names=['Jani','Hege','Kai']">
  <p>Looping with ng-repeat:</p>
  <ul>
    <li ng-repeat="x in names"
```

Looping with ng-repeat:

- Jani
- Hege
- Kai

AngularJS да директивалар: ng-repeat



```
<!DOCTYPE html>
<html>
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body>

<div ng-app="" ng-init="names=[
{name:'Jani',country:'Norway'},
{name:'Hege',country:'Sweden'},
{name:'Kai',country:'Denmark'}]">

<p>Looping with objects:</p>
<ul>
  <li ng-repeat="x in names">
    {{ x.name + ', ' + x.country }}</li>
</ul>

</div>

</body>
</html>
```

Looping with objects:

- Jani, Norway
- Hege, Sweden
- Kai, Denmark



AngularJS да ифодалар

AngularJS да ифодалар қўшалок фигурали қавс ичида берилади

- `{{ expression }}`

AngularJS да ифодаларни директива ичида ҳам бериш мумкин

- `ng-bind="expression"`

AngularJS да ифодалар



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs
/1.6.9/angular.min.js"></script>
<body>
<div ng-app>
<p>My first expression: {{ 5 + 15 }}</p>
</div>
</body>
</html>
```

My first expression: 20

AngularJS да ифодалар



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.
6.9/angular.min.js"></script>
<body>
<p>Change the value of the input field:</p>
<div ng-app="" ng-init="myCol='lightblue'">
<input style="background-color:{{myCol}}" ng-
model="myCol">
</div>
</body>
</html>
```

Change the value of the input field:

blue

Change the value of the input field:

yellow

AngularJS да ифодалар: Number



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/
ajax/libs/angularjs/1.6.9/angular
.min.js"></script>
<body>

<div ng-app="" ng-
init="quantity=1;cost=5"
>
<p>Total in dollar: {{
quantity * cost }} </p>

</div>
</body>
</html>
```

```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/
libs/angularjs/1.6.9/angular.min.js"><
/s>script>
<body>

<div ng-app="" ng-
init="quantity=1;cost=5"
>
<p>Total in dollar:
<span ng-bind="quantity
* cost"></span></p>

</div>
</body>
</html>
```

Total in dollar: 5

AngularJS да ифодалар: String



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/
libs/angularjs/1.6.9/angular.min.js"><
/script>
<body>

<div ng-app="" ng-
init="firstName='John';las
tName='Doe'">
<p>The full name is: {{
firstName + " " + lastName
}}</p>
</div>

</body>
</html>
```

```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/
libs/angularjs/1.6.9/angular.min.js"><
/script>
<body>

<div ng-app="" ng-
init="firstName='John';las
tName='Doe'">
<p>The full name is: <span
ng-bind="firstName + ' ' +
lastName"></span></p>
</div>

</body>
</html>
```

The full name is: John Doe

AngularJS да ифодалар: Object



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/aj
ax/libs/angularjs/1.6.9/angular.min
.js"></script>
<body>

<div ng-app="" ng-
init="person={firstName:'John
',lastName:'Doe'}">
<p>The name is {{
person.lastName }} </p>
</div>

</body>
</html>
```

```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/
libs/angularjs/1.6.9/angular.min.js"><
/s>script>
<body>

<div ng-app="" ng-
init="person={firstName:'John
',lastName:'Doe'}">
<p>The name is <span ng-
bind="person.lastName"></span
></p>
</div>

</body>
</html>
```

The name is Doe



AngularJS да ифодалар: Array

```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/aj
ax/libs/angularjs/1.6.9/angular.min
.js"></script>
<body>

<div ng-app="" ng-
init="points=[1,15,19,2,40]">

<p>The third result is {{
points[2] }}</p>

</div>
</body>
</html>
```

```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/
libs/angularjs/1.6.9/angular.min.js"><
/s>script>
<body>

<div ng-app="" ng-
init="points=[1,15,19,2,40]">

<p>The third result is <span
ng-bind=
"points[2]"></span></p>
</body>
</html>
```

The third result is 19



AngularJS да модуллар

AngularJS да модул – илованинг турли қисмлари
учун контейнер вазифасини бажаради

AngularJS да модул – илованинг контроллерлари
учун контейнер ҳисобланади

контроллерлари ҳар доим модулга тегишли
бўлади



AngularJS да модул яратиш

```
<div ng-app="myApp">...</div>
```

```
<script>  
var app = angular.module("myApp", []);  
</script>
```

бу ерда, “myApp” параметри иловани ишга туширадиган HTML элементга мурожаат қилади

AngularJS да модулга контроллер кўшиш



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></scr
ipt>
<body>

<div ng-app="myApp" ng-controller="myCtrl">
{{ firstName + " " + lastName }}
</div>

<script>
var app = angular.module("myApp", []);
app.controller("myCtrl", function($scope) {
    $scope.firstName = "John";
    $scope.lastName = "Doe";
});
</script>

</body>
</html>
```

John Doe

AngularJS да модулга директива қўшиш



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></scr
ipt>
<body>

<div ng-app="myApp" w3-test-directive></div>

<script>
var app = angular.module("myApp", []);
app.directive("w3TestDirective", function() {
    return {
        template : "I was made in a directive constructor!"
    };
});
</script>

</body>
</html>
```

I was made in a directive constructor!

AngularJS да модул ва контроллерни ташқи файлдан қўшиш



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></scr
ipt>
<body>
<div ng-app="myApp" ng-controller="myCtrl">
{{ firstName + " " + lastName }}
</div>

<script src="myApp.js"></script>
<script src="myCtrl.js"></script>
</body>
</html>
```

myApp.js

```
var app = angular.module("myApp", []);
```

John Doe

myCtrl.js

```
app.controller("myCtrl",
function($scope) {
    $scope.firstName = "John";
    $scope.lastName= "Doe";
});
```

МУҲАММАД АЛ-ХОРАЗМИЙ НОМИДАГИ ТОШКЕНТ АХБОРОТ ТЕХНОЛОГИЯЛАРИ УНИВЕРСИТЕТИ

Мултимедиа технологиялари кафедраси

AngularJS да анимациялар.
Форма элементлари билан ишлаш.

Режа:

1. AngularJS да Scope.
2. AngularJS да филтерлар.
3. AngularJS да ходисалар.
4. AngularJS да анимациялар.
5. AngularJS да форма элементлари билан ишлаш.
6. AngularJS да форма элементлари валидацияси.





AngularJS да Scope

Scope – AngularJS да Controller (JavaScript) ва View (HTML) ўртасидаги бирлаштирувчи ҳисобланади

Scope – функциялар ва хусусиятларга эга бўлган объект ҳисобланади.



AngularJS да Scope



```
<div ng-app="myApp" ng-controller="myCtrl">

<h1>{{ carname }}</h1>

</div>

<script>
var app = angular.module('myApp', []);
app.controller('myCtrl', function($scope) {
    $scope.carname = "Volvo";
});
</script>
```

Volvo



AngularJS да Scope

```
<div ng-app="myApp" ng-controller="myCtrl">
  <input ng-model="name">
  <h1>My name is {{name}}</h1>

</div>

<script>
var app = angular.module('myApp', []);
app.controller('myCtrl', function($scope) {
  $scope.name = "John Doe";
});
</script>
```

My name is John Doe



AngularJS да филтерлар

currency

- Сонни валюта форматига ўтказиш

date

- Санани белгиланган форматга ўтказиш

number

- Матнли сонли форматга ўтказиш

orderBy

- Массивни саралаш

filter

- Массивнинг маълум қисмини танлаш

json

- Объектни JSON форматига ўтказиш

limitTo

- Массив (сатр) маълум элементлар (белгилар) сони бўйича чеклаш

lowerCase

- Матнни кичик ҳарфларга ўтказиш

uppercase

- Матнни катта ҳарфларга ўтказиш

AngularJS да филтерлар: ифодаларга филтерни қўшиш



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body>
<div ng-app="myApp" ng-controller="personCtrl">
  <p>The name is {{ lastName | uppercase }}</p>
  <p>The name is {{ firstName | lowercase }}</p>
</div>
<script>
angular.module('myApp', []).controller('personCtrl',
function($scope) {
    $scope.firstName = "John",
    $scope.lastName = "Doe"
});
</script>

</body>
</html>
```

The name is DOE

The name is john

AngularJS да филтерлар: директиваларга филтерни кўшиш



```
<div ng-app="myApp" ng-controller="namesCtrl">
<p>Looping with objects:</p>
<ul>
  <li ng-repeat="x in names | orderBy:'country'">
    {{ x.name + ', ' + x.country }}
  </li>
</ul>
</div>
<script>
angular.module('myApp', []).controller('namesCtrl', function($scope) {
  $scope.names = [
    {name:'Jani',country:'Norway'},
    {name:'Carl',country:'Sweden'},
    {name:'Margareth',country:'England'},
    {name:'Hege',country:'Norway'},
    {name:'Joe',country:'Denmark'},
    {name:'Gustav',country:'Sweden'}, {name:'Birgit',country:'Denmark'},
    {name:'Mary',country:'England'}, {name:'Kai',country:'Norway'}
  ];
});
</script>
```

- Joe, Denmark
- Birgit, Denmark
- Margareth, England
- Mary, England
- Jani, Norway
- Hege, Norway
- Kai, Norway
- Carl, Sweden
- Gustav, Sweden

AngularJS да филтерлар: filter



```
<div ng-app="myApp" ng-controller="namesCtrl">
<ul>
  <li ng-repeat="x in names | filter : 'i'">
    {{ x }}
  </li>
</ul>
</div>

<script>
angular.module('myApp', []).controller('namesCtrl', function($scope) {
  $scope.names = [
    'Jani',
    'Carl',
    'Margareth','Hege', 'Joe', 'Gustav', 'Birgit', 'Mary', 'Kai'
  ];
});
</script>
```

- Jani
- Birgit
- Kai

AngularJS да филтерлар: orderBy



```
<div ng-app="myApp" ng-controller="namesCtrl">
<table border="1" width="100%">
  <tr>
    <th ng-click="orderByMe('name')">Name</th>
    <th ng-click="orderByMe('country')">Country</th>
  </tr>
  <tr ng-repeat="x in names | orderBy:myOrderBy">
    <td>{{x.name}}</td>
    <td>{{x.country}}</td>
  </tr>
</table>
</div>
<script>
angular.module('myApp', []).controller('namesCtrl', function($scope) {
  $scope.names = [
    {name:'Jani',country:'Norway'}, {name:'Carl',country:'Sweden'},
    {name:'Margareth',country:'England'}, {name:'Hege',country:'Norway'},
    {name:'Joe',country:'Denmark'}, {name:'Gustav',country:'Sweden'},
    {name:'Birgit',country:'Denmark'}, {name:'Mary',country:'England'},
    {name:'Kai',country:'Norway'}
  ];
  $scope.orderByMe = function(x) {
    $scope.myOrderBy = x;
  }
});
</script>
```

Name	Country
Jani	Norway
Carl	Sweden
Margareth	England
Hege	Norway
Joe	Denmark
Gustav	Sweden
Birgit	Denmark
Mary	England
Kai	Norway

Name	Country
Birgit	Denmark
Carl	Sweden
Gustav	Sweden
Hege	Norway
Jani	Norway
Joe	Denmark
Kai	Norway
Margareth	England
Mary	England

Name	Country
Joe	Denmark
Birgit	Denmark
Margareth	England
Mary	England
Jani	Norway
Hege	Norway
Kai	Norway
Carl	Sweden 33
Gustav	Sweden



AngularJS да ҳодисалар

Ҳодиса номи	
ng-blur	ng-focus
ng-change	ng-keydown
ng-click	ng-keypress
ng-copy	ng-keyup
ng-cut	ng-mousedown
ng-paste	ng-mouseenter
ng-dblclick	ng-mouseleave
ng-mousemove	ng-mouseover
ng-mouseup	ng-paste

AngularJS да ходисалар: ng-mousemove, ng-click



```
<div ng-app="myApp" ng-controller="myCtrl">
```

```
<h1 ng-mousemove="count = count + 1">Mouse over  
me!</h1>
```

```
<h2>{{ count }}</h2>
```

```
</div>
```

```
<script>
```

```
var app = angular.module('myApp', []);  
app.controller('myCtrl', function($scope) {  
    $scope.count = 0;  
});
```

```
</script>
```

Mouse Over Me!

1

Mouse Over Me!

20

```
<button ng-click="count = count + 1">Click  
me!</button>
```

Click Me!

Click Me!

0

5



AngularJS да анимациялар

Иловалани анимацияларга тайёр қилиш учун дастлаб, AngularJS Animate кутубхонасини улаш шарт ҳисобланади:

- `<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular-animate.js"></script>`

Кейин ngAnimate модулига мурожаат қилишингиз керак:

- `<body ng-app="ngAnimate">`

Ёки ном билан ngAnimate модулига мурожаат қилишингиз мумкин:

- `<script> var app = angular.module('myApp', ['ngAnimate']);</script>`



NgAnimate вазифаси нима?

NgAnimate модули class ларни қўшиш, олиб ташлаш вазифасини бажаради.

NgAnimate модули HTML элементларни ҳаракатлантирмайди, лекин HTML элементларни яшириш ёки намоиш қилиш каби ҳодисаларни амалга оширади



AngularJS да анимациялар

Angular Js да синфларни қўшиш ёки ўчириш вазифасини бажарувчи директивалар қўйидагилар:

<code>ng-show</code>	<code>ng-hide</code>
<code>ng-class</code>	<code>ng-view</code>
<code>ng-include</code>	<code>ng-repeat</code>
<code>ng-if</code>	<code>ng-switch</code>

AngularJS да анимациялар



```
<!DOCTYPE html>
<html>
<style>
div {
  transition: all linear 0.5s;
  background-color: lightblue;
  height: 100px; width: 100%; position: relative; top: 0; left: 0;
}
.ng-hide {
  height: 0; width: 0; background-color: transparent; top: -200px; left: 200px;
}
</style>
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular-animate.js"></script>
<body ng-app="myApp">
<h1>Hide the DIV: <input type="checkbox" ng-model="myCheck"></h1>
<div ng-hide="myCheck"></div>
<script>
var app = angular.module('myApp', ['ngAnimate']);
</script>
</body>
</html>
```

Hide the DIV: ☐



Hide the DIV: ☒


AngularJS да анимациялар.



AngularJS - CSS ёрдамида анимацияли ўтишларни таъминлайди.

```
<!DOCTYPE html>
<html>
<style>
div {
  transition: all linear 0.5s;
  background-color: lightblue;
  height: 100px;
  width: 100%;
  position: relative;
  top: 0; left: 0;}
.ng-hide {
  height: 0; width: 0;
  background-color: transparent;
  top: -200px;
  left: 200px; }
</style>
```

```
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular-animate.js"></script>
<body ng-app="ngAnimate">
<h1>Hide the DIV: <input type="checkbox" ng-model="myCheck"></h1>
<div ng-hide="myCheck"></div>
</body></html>
```

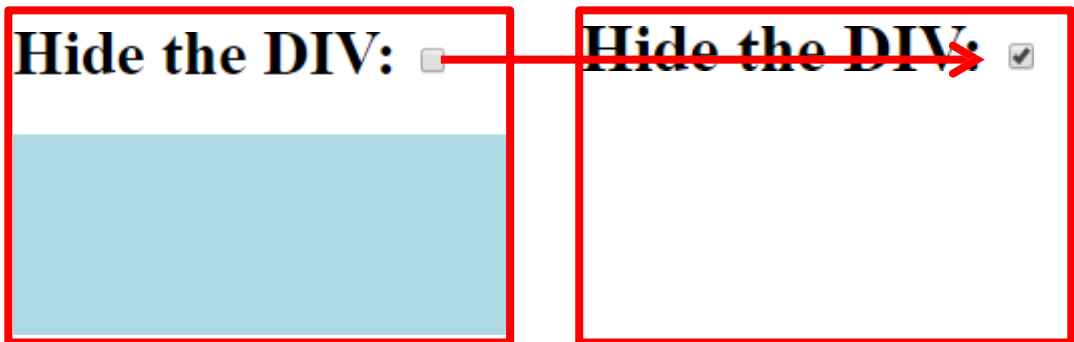

AngularJS да форма элементлари билан ишлаш



AngularJS да формалар – киритиш элементлари билан маълумотлар боғланишини текширишни таъминлайди.

Киритиш элементлари:
input, select, button, textarea.

Киритиш элементлари **ng-model** директиваси орқали боғланади.

- `<input type="text" ng-model="firstname">`

AngularJS да форма элементлари билан ишлаш



AngularJS да маълумотни киритиш.

```
<!DOCTYPE html><html lang="en">
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body>
<div ng-app="myApp" ng-controller="formCtrl">
  <form>
    First Name: <input type="text" ng-model="firstname">
  </form>
</div>
<script>
var app = angular.module('myApp', []);
app.controller('formCtrl', function($scope) {
  $scope.firstname = "John";
});
</script>
</body></html>
```

First Name: TUIT

AngularJS да форма элементлари билан ишлаш



Кириштирилган маълумотни дастурнинг бошқа жойларига ҳам юбориш мумкин.

```
<!DOCTYPE html>
<html>
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body>
<div ng-app="">
  <form>
    First Name: <input type="text" ng-model="firstname">
  </form>
  <h1>You entered: {{firstname}}</h1>
</div>
</body>
</html>
```

The screenshot shows a web application with a form and a message. The form has a label "First Name:" followed by a text input field containing the value "TUIT". A red arrow points from the input field to the output message. The output message is "You entered: TUIT", where "TUIT" is highlighted with a red box. The entire content is enclosed in a red rectangular border.

Checkbox киритиш элементи



```
<!DOCTYPE html><html>
<script src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body>
<div ng-app="">
  <form>
    Check to show a header:
    <input type="checkbox" ng-model="myVar">
  </form>
  <h1 ng-show="myVar">TUIT</h1>
</div>
</body>
</html>
```

Check to show a header: ☐

Check to show a header: ☒

TUIT

Radio киритиш элементи



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.
9/angular.min.js">
</script>
<body ng-app="">
<form> Pick a topic:
  <input type="radio" ng-
model="myVar" value="edu">TUIT
  <input type="radio" ng-
model="myVar"
value="Dekanat">Dekanat
  <input type="radio" ng-
model="myVar"
value="Talaba">Talaba
</form>
```

```
<div ng-switch="myVar">
  <div ng-switch-when="edu">
    <h1>TUIT</h1>
  </div>
  <div ng-switch-when="Dekanat">
    <h1>Dekanat</h1>
  </div>
  <div ng-switch-when="Talaba">
    <h1>Talaba</h1>
  </div> </div>
</body> </html>
```

Pick a topic: ☒ TUIT ☐ Dekanat ☐ Talaba

Pick a topic: ☒ TUIT ☐ Dekanat ☐ Talaba

TUIT

Pick a topic: ☐ TUIT ☒ Dekanat ☐ Talaba

Dekanat

Pick a topic: ☐ TUIT ☐ Dekanat ☒ Talaba

Talaba

Selectbox киритиш элементи



```
<!DOCTYPE html>
<html><script
src="https://ajax.googleapis.com/ajax/libs/angularjs
/1.6.9/angular.min.js"></script>
<body ng-app="">
<form>  Select a topic:
  <select ng-model="myVar">
    <option value="">
    <option value="TUIT">TUIT
    <option value="Dekanat">Dekanat
    <option value="Talaba">Talaba
  </select>
</form>
```

```
<div ng-switch="myVar">
  <div ng-switch-
when="TUIT">
    <h1>TUIT</h1> </div>
  <div ng-switch-
when="Dekanat">
    <h1>Dekanat</h1>
  </div>
  <div ng-switch-
when="Talaba">
    <h1>Talaba</h1>
  </div>
</div>
</body> </html>
```

AngularJS да форма элементлари валидацияси



AngularJS да формалар элементлари валидациясини клиент томонида текширишни амалга оширади.

Қуйидаги киритиш элементларининг ҳолатини кузатади ва фойдаланувчига жорий ҳолат ҳақида хабар беради:
input, select, textarea.

Киритиш элементларини текширишни HTML5 нинг стандарт атрибутларидан фойдаланиб текширишингиз мумкин ёки ўз текшириш функциянгизни ёзишингиз мумкин.

HTML5 required атрибути орқали



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body ng-app="">
<form name="myForm">
<input name="myInput" ng-model="myInput" required>
</form>
<p>The input's valid state is:</p>
<h1>{{myForm.myInput.$valid}}</h1>
</body>
</html>
```

The input's valid state is:

false

The input's valid state is:

true

HTML5 e-mail атрибути орқали



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body ng-app="">
<form name="myForm">
<input type="email" name="myInput" ng-model="myInput">
</form>
<p>The input's valid state is:</p>
<h1>{{myForm.myInput.$valid}}</h1>

</body>
</html>
```

The input's valid state is:

false

The input's valid state is:

true

AngularJS да форма элементлари валидацияси: киритиш элементлари ҳолати



\$untouched

- Киритиш майдонига ҳали тегилмаган

\$touched

- Киритиш майдонига тегилган

\$pristine

- Киритиш майдони ўзгартирилмаган

\$dirty

- Киритиш майдони ўзгартирилган

\$invalid

- Киритиш майдонидаги қиймат валидация қондасига тўғри келмайди

\$valid

- Киритиш майдонидаги қиймат валидация қондасига мос тушади

AngularJS да форма элементлари валидацияси:

форма ҳолати



\$pristine

- Формадаги киритиш майдонлари ўзгартирилмаган

\$dirty

- Формадаги бир ёки ундан ортиқ киритиш майдонлари ўзгартирилган

\$invalid

- Киритиш майдонларидаги қиймат валидация қоидаcига тўғри келмайди

\$valid

- Киритиш майдонларидаги қиймат валидация қоидаcига мос тушади

\$submitted

- Киритилган қийматлар юборилди

AngularJS да форма элементлари валидацияси:



```
<!DOCTYPE html>
<html>
<script
src="https://ajax.googleapis.com/ajax/libs/angularjs/1.6.9/angular.min.js"></script>
<body ng-app="">
<p>Try leaving the first input field blank:</p>
<form name="myForm">
<p>Name:
<input name="myName" ng-model="myName" required>
<span ng-show="myForm.myName.$touched &&
myForm.myName.$invalid">The name is required.</span>
</p>
<p>Address:
<input name="myAddress" ng-model="myAddress" required>
</p>
</form>
</body>
</html>
```

Try leaving the first input field blank:

Name:

Address:

Try leaving the first input field blank:

Name: The name is required.

Address:

AngularJS да форма элементлари валидацияси: янги қоида киритиш



```
<form name="myForm">
  <input name="myInput" ng-model="myInput" required my-directive>
</form>
<p>The input's valid state is:</p>
<h1>{{myForm.myInput.$valid}}</h1>
<script>
var app = angular.module('myApp', []);
app.directive('myDirective', function() {
  return {
    require: 'ngModel',
    link: function(scope, element, attr, mCtrl) {
      function myValidation(value) {
        if (value.indexOf("e") > -1) {
          mCtrl.$setValidity('charE', true);
        } else {
          mCtrl.$setValidity('charE', false);
        }
      }
      return value;
    }
    mCtrl.$parsers.push(myValidation);
  };
});
</script>
<p>The input field must contain the character "e" to be consider valid.</p>
```

The input's valid state is:

false

The input field must contain the character "e" to be consider valid.

The input's valid state is:

true

The input field must contain the character "e" to be consider valid.