

# Computer Science

(Assignment#4)



**Submitted By:**

**Name: Abdul Rehman Imtiaz**

**Section: BSCS (1C)**

**SAP ID:46885**

**Submitted to: Miss Aliya Farooq.**

**“Programming Fundamental”**

**Riphaah School of Computing & Innovation**

**Faculty of Computing**

**Riphaah International University, Lahore.**

**Fall 2022.**

## Programme:1

```
#include<iostream>

using namespace std;

struct moviedata

{

    string title;

    string Director;

    int year;

    string time;

};

void displayinfo(moviedata);

int main()

{

    moviedata a,b;

    a.Director= "hennerly";

    a.time= "2 hours";

    a.title= "Godzilla";

    a.year= 2018;


    b.Director= "Andrew";

    b.time= "2 hours";

    b.title= "Avengers";

    b.year=2020;
```

```

        displayinfo(a);
displayinfo(b);

    }

    void displayinfo(moviedata M)
    {
        cout << "\n\n    Move information\n"
        << "-----\n";    cout <<
"Title:          " << M.title << endl;    cout << "Director:
" << M.Director << endl;    cout << "Year Released:    "
<< M.year << endl;    cout << "Runing Time (minutes): " <<
M.time << endl;

    }

```

### **Output:**

```

        Move information
-----
Title:          Godzilla
Director:       hennery
Year Released:  2018
Runing Time (minutes): 2 hours

        Move information
-----
Title:          Avengers
Director:       Andrew
Year Released:  2020
Runing Time (minutes): 2 hours

-----
Process exited after 0.1083 seconds with return value 0
Press any key to continue . . .

```

## Programme:2

```
#include<iostream> using
namespace std; struct
moviedata

{
    string title; string
Director;    int year;    string
time; int production_cost;
string first_yr_revenues;

};

void displayinfo(moviedata);

int main()
{
    moviedata a,b;

    a.Director= "hennery";

    a.time= "2 hours";

    a.title= "Godzilla";

    a.year= 2018;

    a.production_cost=1000000000;

    a.first_yr_revenues="3 million";
```

```

        b.Director= "Andrew";

        b.time= "2 hours";

        b.title= "Avengers";

        b.year=2020;

        b.production_cost=1000000000;

        b.first_yr_revenues="4 million";


        displayinfo(a);
displayinfo(b);


    }

    void displayinfo(moviedata M)
    {

        cout << "\n\n    Move information\n"
        << "-----\n";        cout << "Title:
" << M.title << endl;        cout << "Director:        " << M.Director <<
endl; cout << "Year Released:        " << M.year << endl; cout <<
"Runing Time (minutes): " << M.time << endl;        cout<<"Production
Cost:        " << M.production_cost<<endl;        cout<<"First Year
Revenues        " << M.first_yr_revenues<<endl;

```

}

### Output:

```
C:\Users\Digital Technologies\OneDrive\Desktop\Untitled1.exe

Move information
-----
Title:          Godzilla
Director:       hennery
Year Released:  2018
Runing Time (minutes): 2 hours
Production Cost: 100000000
First Year Revenues 3 million

Move information
-----
Title:          Avengers
Director:       Andrew
Year Released:  2020
Runing Time (minutes): 2 hours
Production Cost: 1000000000
First Year Revenues 4 million

-----
Process exited after 0.1001 seconds with return value 0
Press any key to continue . . .
```

### Programme:3

```
#include<iostream>

#include<string> using
namespace std; struct
company
```

```
{  
    string division_name;  
    int first_quater_sales;    int  
second_quater_sales;    int  
third_quater_sales;    int  
fourth_quater_sales;    int  
total_annuel_sales;    int  
average_quarterly_sales;
```

```
};
```

```
void calcost(company &); void
```

```
displayinfo(company); int
```

```
main()
```

```
{
```

```
    company A,B,C,D;
```

```
    A.division_name="east";
```

```
    A.first_quater_sales=1550;
```

```
    A.second_quater_sales=3100;
```

```
    A.third_quater_sales=3200;
```

```
    A.fourth_quater_sales=7300;
```

```
    B.division_name="west";
```

```
    B.first_quater_sales=1100;
```

B.second\_quater\_sales=4100;

B.third\_quater\_sales=1300;

B.fourth\_quater\_sales=1300;

C.division\_name="north";

C.first\_quater\_sales=1400;

C.second\_quater\_sales=9100;

C.third\_quater\_sales=1800;

C.fourth\_quater\_sales=7300;

D.division\_name="south";

D.first\_quater\_sales=1600;

D.second\_quater\_sales=3100;

D.third\_quater\_sales=1200;

D.fourth\_quater\_sales=5300;

calcost(A);

calcost(B);    calcost(C);

calcost(D);

displayinfo(A);

displayinfo(B);

displayinfo(C);



```

displayinfo(D);    return
0;

}

void calcost(company &M)
{
    M.total_annuel_sales=M.first_quater_sales+M.second_quater_sales+M.thi
rd_quater_sales+M.fourth_quater_sales;

    M.average_quarterly_sales=M.total_annuel_sales/4;

}

void displayinfo(company D)
{
    cout << "\n      Sales Data\n";      cout << "-----
-----\n";    //cout << fixed << showpoint << setprecision(2);    cout <<
"Division :      " << D.division_name << endl;      cout << "Total Sales :
$" << D.total_annuel_sales << endl;    cout << "Quarterly average : $" <<
D.average_quarterly_sales << endl;

}

```

```
C:\Users\Digital Technologies\OneDrive\Desktop\Untitled1.exe

Sales Data
-----
Division :      east
Total Sales :   $15150
Quarterly average : $3787

Sales Data
-----
Division :      west
Total Sales :   $7800
Quarterly average : $1950

Sales Data
-----
Division :      north
Total Sales :   $19600
Quarterly average : $4900

Sales Data
-----
Division :      south
Total Sales :   $11200
Quarterly average : $2800

-----
Process exited after 0.09769 seconds with return value 0
Press any key to continue . . .
```

### Programme:4

```
#include<iostream> using
namespace std; const
short months = 12;
```

```
char MONTHS[months][10] = { "January", "February", "March", "April", "May",  
    "June", "July", "August", "September", "October",
```

```
    "November", "December" }; struct
```

```
Weather_data
```

```
{
```

```
    float total_rainfall;
```

```
float high_temp; float
```

```
low_temp; float
```

```
avg_temp; string month;
```

```
};
```

```
void setAverage(Weather_data [], int); double
```

```
arrayAverage(Weather_data [], string); void
```

```
max_min_temp(Weather_data [], short&, short&); void
```

```
getData(Weather_data []); void lastBits(Weather_data
```

```
[]); int main()
```

```
{
```

```
    Weather_data array[months];
```

```
    getData(array);
```

```
    lastBits(array);
```

```
    return 0;
```

```
}
```

```

void setAverage(Weather_data array[],int i )
{
    array[i].avg_temp=(array[i].high_temp+array[i].low_temp)/2;
}

double arrayAverage(Weather_data array [], string choice)
{
    double average = 0;
    if(choice == "temp")
    {

        for(int i = 0; i < months; i++)
            average += array[i].avg_temp;

        return (average / months);
    }

    if(choice == "rain")
    {

```

```
        for(int i = 0; i < months; i++)
            average += array[i].total_rainfall;

        return (average / months);
    }
}
```

```
void max_min_temp(Weather_data array [], short & max_pos, short & min_pos)
{
```

```
    double min = array[0].low_temp, max = array[0].high_temp;
    min_pos = 0;      max_pos = 0;
```

```
    for(int i = 1; i < months; i++)
    {
```

```
        if(min > array[i].low_temp)
        {
            min = array[i].low_temp;
            min_pos = i;
```

```

    }

    if(max < array[i].high_temp)
    {
        max = array[i].high_temp;
    }
    max_pos = i;
}
}

```

```

void getData(Weather_data array[])
{
    cout << "Let's do some weather statistics. " << endl;

    cout << "We'll do the total rainfall plus " << endl;
    cout << "highest and lowest temperatures" << endl;

    cout << "according to months ranging from -100 to 140 degrees " << endl;
    cout << "Fahrenheit." << endl;

    for(int i = 0; i < months; i++)

```

```

{

    cout << "From " << MONTHS[i] << ": " << endl;
    cout << "Total rainfall: \t";

    cin >> array[i].total_rainfall;

    while(array[i].total_rainfall < 0)
    {
        cout << endl << "Please enter something that isn't negative. ";

        cout << "Total rainfall: \t";

        cin >> array[i].total_rainfall;
    }

    cout << "Highest temperature: \t";

    cin >> array[i].high_temp;

    while((array[i].high_temp < -100) or (array[i].high_temp > 140))

```

```

        {

            cout << endl << "Input a temperature " << endl << "ranging
from -100 to 140 degrees Fahrenheit. " << endl;

            cout << "Highest temperature: \t";

            cin >> array[i].high_temp;
        }

        cout << "Lowest temperature: \t";

        cin >> array[i].low_temp;

        while((array[i].low_temp < -100) or (array[i].low_temp > 140)
or (array[i].low_temp > array[i].high_temp))

        {

            cout << "Either you need to input a temperature " << endl <<
"ranging from -100 to 140 degrees " << endl << "Fahrenheit or your lowest is
bigger than the highest. " << endl;

            cout << "Lowest temperature: \t";

            cin >> array[i].low_temp;

```



```

    }

    setAverage(array, i);

    cout << endl;
}
}

```

```

void lastBits(Weather_data array[])
{
    short max_pos, min_pos;

    max_min_temp(array, max_pos, min_pos);

    cout << "Now to show the last bits of the year. " << endl;

    cout << "Average rainfall: \t " << arrayAverage(array, "rain") << endl
    << "Highest temperature: \t " << array[max_pos].high_temp << " (on "
    << MONTHS[max_pos] << ")" << endl;

    cout << "Lowest temperature: \t " << array[min_pos].low_temp << " (on "
    << MONTHS[min_pos] << ")" << endl << "Average temperature: \t " <<
    arrayAverage(array, "temp") << endl;
}

```

```

Let's do some weather statistics.
We'll do the total rainfall plus
highest and lowest temperatures
according to months ranging from -100
Fahrenheit.
From January:
Total rainfall:      23
Highest temperature: 54
Lowest temperature:  12

From February:
Total rainfall:      20
Highest temperature:  8
Lowest temperature:  1

From March:
Total rainfall:      10
Highest temperature:  7
Lowest temperature:  1

From April:
Total rainfall:       5
Highest temperature: 34
Lowest temperature:  9

From May:
Total rainfall:      21.1
Highest temperature: 43.2
Lowest temperature:  9.0

From June:
Total rainfall:      19.01
Highest temperature: 37
Lowest temperature:  17

From July:
Total rainfall:      20.12
Highest temperature: 23.32
Lowest temperature:  19.1

From August:
Total rainfall:      76.54
Highest temperature: 50
Lowest temperature:  25

From September:
Total rainfall:      55.01
Highest temperature: 45
Lowest temperature:  23.5

```

```

}

```

### Output:

```

From August:
Total rainfall:      76.54
Highest temperature: 50
Lowest temperature:  25

From September:
Total rainfall:      55.01
Highest temperature: 45
Lowest temperature:  23.5

From October:
Total rainfall:      45.5
Highest temperature: 34
Lowest temperature:  23

From November:
Total rainfall:      65.5
Highest temperature: 41
Lowest temperature:  29

From December:
Total rainfall:      65
Highest temperature: 21
Lowest temperature:  1

Now to show the last bits of the year.
Average rainfall:    35.4817
Highest temperature: 54 (on January)
Lowest temperature:  1 (on February)
Average temperature: 23.63

```

### Programme:5

```

#include<iostream>

using namespace std;

struct weather
{
    double total_rain_fall;

    double hight_t,low_t;

    double avg;
};

enum;

months{January=1,February, March, April, May,

        June, July, August, September, October,

        November, December;

int main ()
{
    weather detail[12];

    months month_name;

    double total=0;

    double highest_temperature,lowest_temperature;

    string hottest_month,coldest_month;

    for(int
    month_names=January;month_names!=December+1;mo
    nth_names++)
    {

```

```

        cout<<"enter total amount of rainfall
in"<<month_names<<";

        cin>>detail[month_names].total_rain_fall;

        total+=detail[month_names].total_rain_fall;

        cout<<"enter highest temperature
in"<<month_names<<";

        cin>>detail[month_names].high_t;

        while(detail[month_names].high_t<-100 ||
detail[month_names].high_t>140)

        {

                cout<<"invalid input entered"<<endl;

                cout<<"enter highest temperature
in"<<month_names<<";

                cin>>detail[month_names].high_t;

        }

        cout<<"enter lowest temperature
in"<<month_names<<";

        cin>>detail[month_names].low_t;

        while(detail[month_names].low_t<-100 ||
detail[month_names].low_t>140)

        {

                cout<<"invalid input entered"<<endl;

                cout<<"enter lowest temperature
in"<<month_names<<";

```

```

        cin>>detail[month_names].low_t;
    }
    cout <<"_____ "<<endl;

    if(highest_temperature<detail[month_names].high
ht_t)
    {

        highest_temperature=detail[month_names].high
_t;

        hottest_month=hottest_name;
    }

    if(lowest_temperature>detail[month_names].low
_t)
    {

        lowest_temperature=detail[month_names].low_t;

        coldest_month=hottest_name;
    }
}

cout<<"total rain fall in a year:"<<total<<endl;
cout<<"avg rainfall in a year:"<<total/12<<endl;

cout<<"highest temperature:"<<highest_temperature<<"
\nrecorded in "<< hottest_month <<endl;

```

```
cout<<"lowest temperature:"<<lowest_temperature<<"\nrecorded in "<< coldest_month <<endl;
```

```
for(int  
month_names=January;month_names!=December+1;month_names++)
```

```
{
```

```
    cout<< "average temperature in  
"<<month_names<<"="<<(detail[month_names].hight_t+  
detail[month_names].low_t)/2<<endl;
```

```
}
```

```
}
```

```
}
```

## **Output**

Let's do some weather statistics.  
We'll do the total rainfall plus  
highest and lowest temperatures  
according to months ranging from -100  
Fahrenheit.

From January:

Total rainfall: 23

Highest temperature: 54

Lowest temperature: 12

From February:

Total rainfall: 20

Highest temperature: 8

Lowest temperature: 1

From March:

Total rainfall: 10

Highest temperature: 7

Lowest temperature: 1

From April:

Total rainfall: 5

Highest temperature: 34

Lowest temperature: 9

From May:

Total rainfall: 21.1

Highest temperature: 43.2

Lowest temperature: 9.0

From June:

Total rainfall: 19.01

Highest temperature: 37

Lowest temperature: 17

From July:

Total rainfall: 20.12

Highest temperature: 23.32

Lowest temperature: 19.1

From August:

Total rainfall: 76.54

Highest temperature: 50

Lowest temperature: 25

From September:

Total rainfall: 55.01

Highest temperature: 45

Lowest temperature: 23.5

```

From August:
Total rainfall:      76.54
Highest temperature: 50
Lowest temperature:  25

From September:
Total rainfall:      55.01
Highest temperature: 45
Lowest temperature:  23.5

From October:
Total rainfall:      45.5
Highest temperature: 34
Lowest temperature:  23

From November:
Total rainfall:      65.5
Highest temperature: 41
Lowest temperature:  29

From December:
Total rainfall:      65
Highest temperature: 21
Lowest temperature:  1

Now to show the last bits of the year.
Average rainfall:    35.4817
Highest temperature: 54 (on January)
Lowest temperature:  1 (on February)
Average temperature: 23.63

```

## Programme:6

```

#include<iostream> using
namespace std; struct
players
{
    string Name="";
    int  Number=0;    int
    Scored_by_Player=0; };

```



```

void input_info(players arr[], int i);
void display_info(players arr[], int j);
void calculate_score(players arr[], int j);
int
main()

{
    players arr[12];
    input_info(arr,12);
    display_info(arr,12);    calculate_score(arr,
12);

}

void input_info(players arr[],int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "Enter the name of the player " << i + 1 << ":";
cin >> arr[i].Name;

        cout << "enter the number of the player " << i + 1 << ":";
cin >> arr[i].Number;

        cout << "Enter the score made by the player " << i + 1 << ":";
cin >> arr[i].Scored_by_Player;

        cout << "-----" << endl;

```

```

    }

}

void display_info(players arr[],int j)

{
    for (int i = 0; i < j; i++)
    {
        cout << "-----
--" << endl;

        cout << "          INFORMATION OF THE PLAYERS
" << endl;

        cout << "-----
--" << endl;

        cout << "NAME OF THE PLAYER " << i + 1 << ":" << arr[i].Name <<
endl;

        cout << "NUMBER OF THE PLAYER " << i + 1 << ":" << arr[i].Number
<< endl;

        cout << "SCORE OF THE PLAYER " << i + 1 << ":" <<
arr[i].Scored_by_Player << endl;

    }

}

void cal_score(players arr[], int j)

{
    int sum = 0;

    for (int i = 0; i < j; i++)

```

```
{  
    sum= sum + arr[i].Scored_by_Player;  
}  
cout << "-----" <<  
endl;  
cout << "TOTAL SCORES OF ALL THE PLAYERS IS:" << sum << endl;  
cout << "-----" <<  
endl;  
}
```

**Output:**

```
Enter the name of the player 1:a
enter the number of the player 1:1
Enter the score made by the player 1:1
-----
Enter the name of the player 2:b
enter the number of the player 2:2
Enter the score made by the player 2:2
-----
Enter the name of the player 3:c
enter the number of the player 3:3
Enter the score made by the player 3:3
-----
Enter the name of the player 4:d
enter the number of the player 4:4
Enter the score made by the player 4:4
-----
Enter the name of the player 5:e
enter the number of the player 5:5
Enter the score made by the player 5:5
-----
Enter the name of the player 6:f
enter the number of the player 6:6
Enter the score made by the player 6:6
-----
Enter the name of the player 7:g
enter the number of the player 7:7
Enter the score made by the player 7:7
-----
Enter the name of the player 8:h
enter the number of the player 8:8
Enter the score made by the player 8:8
-----
Enter the name of the player 9:i
enter the number of the player 9:9
Enter the score made by the player 9:9
-----
Enter the name of the player 10:j
enter the number of the player 10:10
Enter the score made by the player 10:10
-----
Enter the name of the player 11:k
enter the number of the player 11:11
Enter the score made by the player 11:11
-----
Enter the name of the player 12:l
enter the number of the player 12:12
Enter the score made by the player 12:12
-----
```

-----  
INFORMATION OF THE PLAYERS  
-----

NAME OF THE PLAYER 1:a  
NUMBER OF THE PLAYER 1:1  
SCORE OF THE PLAYER 1:1  
-----

-----  
INFORMATION OF THE PLAYERS  
-----

NAME OF THE PLAYER 2:b  
NUMBER OF THE PLAYER 2:2  
SCORE OF THE PLAYER 2:2  
-----

-----  
INFORMATION OF THE PLAYERS  
-----

NAME OF THE PLAYER 3:c  
NUMBER OF THE PLAYER 3:3  
SCORE OF THE PLAYER 3:3  
-----

-----  
INFORMATION OF THE PLAYERS  
-----

NAME OF THE PLAYER 4:d  
NUMBER OF THE PLAYER 4:4  
SCORE OF THE PLAYER 4:4  
-----

-----  
INFORMATION OF THE PLAYERS  
-----

NAME OF THE PLAYER 5:e  
NUMBER OF THE PLAYER 5:5  
SCORE OF THE PLAYER 5:5  
-----

-----  
INFORMATION OF THE PLAYERS  
-----

NAME OF THE PLAYER 6:f  
NUMBER OF THE PLAYER 6:6  
SCORE OF THE PLAYER 6:6  
-----

-----  
INFORMATION OF THE PLAYERS  
-----

NAME OF THE PLAYER 7:g  
NUMBER OF THE PLAYER 7:7  
SCORE OF THE PLAYER 7:7  
-----

-----  
INFORMATION OF THE PLAYERS  
-----

NAME OF THE PLAYER 8:h  
NUMBER OF THE PLAYER 8:8  
SCORE OF THE PLAYER 8:8  
-----

-----  
INFORMATION OF THE PLAYERS  
-----

```

                                INFORMATION OF THE PLAYERS
-----
NAME OF THE PLAYER 9:i
NUMBER OF THE PLAYER 9:9
SCORE OF THE PLAYER 9:9
-----
                                INFORMATION OF THE PLAYERS
-----
NAME OF THE PLAYER 10:j
NUMBER OF THE PLAYER 10:10
SCORE OF THE PLAYER 10:10
-----
                                INFORMATION OF THE PLAYERS
-----
NAME OF THE PLAYER 11:k
NUMBER OF THE PLAYER 11:11
SCORE OF THE PLAYER 11:11
-----
                                INFORMATION OF THE PLAYERS
-----
NAME OF THE PLAYER 12:l
NUMBER OF THE PLAYER 12:12
SCORE OF THE PLAYER 12:12
-----
TOTAL SCORES OF ALL THE PLAYERS IS:78
-----

```

### Programme: 7

```

#include<iostream>

using namespace std;

struct customer

{

    string Name;    string

    Address; string City, State;

    int ZIP=0;    int

    Tel_Num=0;

```

```

        float Account_Balance=0;
            string Date_of_Last_Payment;

};

void input_info(customer arr[], int j); void
display_info(customer arr[], int j); void
edit_info(customer arr[], int j, string name); int
main()

{
    int op;

    customer x[20];    menu:

        cout << "-----
-" << endl;

    cout << "                MENU                " << endl; cout << "-----
-----

-" << endl;

        cout << "Enter 1 to input the data of the customer" << endl;    cout <<
"Enter 2 to edit data of the customer" << endl;    cout << "Enter 3 to display
the data of customer " << endl;

        cin >> op;

    cout << "-----
-" << endl;

        if (op == 1)

```

```

{
    input_info(x, 20); int back;

    cout << "                Enter 0 to go back to the menu:";

    cin >> back;    if
(back == 0)

    {
        goto menu;
    }
}

if (op == 2)
{
    string a;

    cout << "Enter any name of the customer:";

    cin >> a;

    edit_info(x, 20, a);

    int back;

    cout << "                Enter 0 to go back to the menu:";

    cin >> back;    if
(back == 0)

    {
        goto menu;
    }
}

```



```

    }

    if (op == 3)
    {
        display_info(x, 20);
        int back;

        cout << "                Enter 0 to go back to the menu:";

        cin >> back;        if
(back == 0)

        {
            goto menu;
        }
    }
}

void input_info(customer arr[], int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "Enter the name of the customer " << i + 1 << ":";
        cin >> arr[i].Name;

        cout << "Enter the address of the customer " << i + 1 << ":";
        cin >> arr[i].Address;
        cout << "Enter the name of city in which the customer lives "
<< i + 1 << ":";
    }
}

```

```

        cin >> arr[i].City;
        cout << "Enter the name of state in which the customer lives "
<< i + 1 << ":";

        cin >> arr[i].State;
        cout << "Enter the ZIP code " << i + 1 << ":";
        cin >> arr[i].ZIP;
        cout << "Enter the Telephone number of the customer " << i +
1 << ":";

        cin >> arr[i].Tel_Num;

        cout << "Enter the account balance of the customer " << i + 1
<< ":";

        cin >> arr[i].Account_Balance;

        cout << "Enter the date of last payment of the customer " << i
+ 1 << ":";

        cin >> arr[i].Date_of_Last_Payment;

        cout << "-----" << endl;
    }
}

void edit_info(customer arr[],int j, string name)
{
    for (int i = 0; i < j; i++)
    {
        if (arr[i].Name == name)
        {

```

```

        cout << "Enter the address of the customer:";          cin
>> arr[i].Address;

        cout << "Enter the name of city in which the customer lives:";
        cin >> arr[i].City;

        cout << "Enter the name of state in which the customer lives:";
        cin >> arr[i].State;

        cout << "Enter the ZIP code:";          cin >>
arr[i].ZIP;

        cout << "Enter the Telephone number of the customer:";
        cin >> arr[i].Tel_Num;

        cout << "Enter the account balance of the customer:";          cin >>
arr[i].Account_Balance;    cout << "Enter the date of last payment of the
customer:";

        cin >> arr[i].Date_of_Last_Payment;
    }
}

void display_info(customer arr[], int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "-----

```

```

-" << endl;

    cout << "          INFORMATION OF " << i + 1 << " CUSTOMER
"<< endl;

        cout << "-----
-" << endl;

        cout << "NAME:" << arr[i].Name << endl;    cout <<
"ADSRESS:" << arr[i].Address << endl;          cout << "CITY:" <<
arr[i].City << endl;

                cout << "STATE:" << arr[i].State << endl;

        cout << "ZIP CODE" << arr[i].ZIP << endl;    cout << "TELEPHONE
NUMBER:" << arr[i].Tel_Num << endl;          cout << "ACCOUNT BALANCE:" <<
arr[i].Account_Balance << endl;

        cout << "DATE OF LAST PAYMENT:" <<
arr[i].Date_of_Last_Payment << endl;

    }

}

```

**Output:**

```
Enter 1 to input the data of the customer
Enter 2 to edit data of the customer
Enter 3 to display the data of customer
1
-----
Enter the name of the customer 1:abdul
Enter the address of the customer 1:aaaaaa
Enter the name of city in which the customer lives 1:lahore
Enter the name of state in which the customer lives 1:pakistan
Enter the ZIP code 1:000000
Enter the Telephone number of the customer 1:1111111
Enter the account balance of the customer 1:2.0000
Enter the date of last payment of the customer 1:22-jan-2022
-----
Enter the name of the customer 2:ali
Enter the address of the customer 2:bbbbbb
Enter the name of city in which the customer lives 2:islamabad
Enter the name of state in which the customer lives 2:pakistan
Enter the ZIP code 2:111111
Enter the Telephone number of the customer 2:2222222
Enter the account balance of the customer 2:10000
Enter the date of last payment of the customer 2:1-jan-2019
-----
Enter the name of the customer 3:ahmed
Enter the address of the customer 3:ccccc
Enter the name of city in which the customer lives 3:taxes
Enter the name of state in which the customer lives 3:america
Enter the ZIP code 3:222222
Enter the Telephone number of the customer 3:33333
Enter the account balance of the customer 3:20000000
Enter the date of last payment of the customer 3:2-march-2018
-----
Enter the name of the customer 4:azhar
Enter the address of the customer 4:dddddd
Enter the name of city in which the customer lives 4:dehli
Enter the name of state in which the customer lives 4:india
Enter the ZIP code 4:44444
Enter the Telephone number of the customer 4:565657
Enter the account balance of the customer 4:10000
Enter the date of last payment of the customer 4:2-feb-2016
-----
Enter the name of the customer 5:abdullah
Enter the address of the customer 5:12b
Enter the name of city in which the customer lives 5:abudhabi
Enter the name of state in which the customer lives 5:dubai
Enter the ZIP code 5:6666
Enter the Telephone number of the customer 5:1098567
```

```

Enter the name of the customer 6:saad
Enter the address of the customer 6:14a
Enter the name of city in which the customer lives 6:muniche
Enter the name of state in which the customer lives 6:germany
Enter the ZIP code 6:3400
Enter the Telephone number of the customer 6:12365478
Enter the account balance of the customer 6:1000000
Enter the date of last payment of the customer 6:15-feb-2015
-----
Enter the name of the customer 7:john
Enter the address of the customer 7:17d
Enter the name of city in which the customer lives 7:las-angles
Enter the name of state in which the customer lives 7:america
Enter the ZIP code 7:2300
Enter the Telephone number of the customer 7:23434
Enter the account balance of the customer 7:2000000000
Enter the date of last payment of the customer 7:120000
-----
Enter the name of the customer 8:emily
Enter the address of the customer 8:23c
Enter the name of city in which the customer lives 8:toronto
Enter the name of state in which the customer lives 8:canada
Enter the ZIP code 8:43001
Enter the Telephone number of the customer 8:245678901
Enter the account balance of the customer 8:120000
Enter the date of last payment of the customer 8:1-september-2013
-----
Enter the name of the customer 9:hennry
Enter the address of the customer 9:auckland
Enter the name of city in which the customer lives 9:new-zealand
Enter the name of state in which the customer lives 9:british
Enter the ZIP code 9:564432
Enter the Telephone number of the customer 9:67549080909

```

## Programme:8

```

#include<iostream>

using namespace std;

struct customer

{

    string Name;    string
    Address; string City, State; int ZIP=0;

```

```

int          Tel_Num=0;          float
Account_Balance=0;

        string Date_of_Last_Payment;

};

void input_info(customer arr[], int j); void
display_info(customer arr[], int j); void
edit_info(customer arr[], int j, string name); void
display_updated_info(customer arr[], int j); void
search_info(customer arr[], int j, string name); int
main()

{
        int op;

        customer x[2];        menu:

cout << "-----
-" << endl;

cout << "                MENU                " << endl; cout << "-----
-----

-" << endl;

        cout << "Enter 1 to input the data of the customer" << endl;        cout <<
"Enter 2 to display data of the customer" << endl; cout << "Enter 3 to edit the
data of customer " << endl;        cout << "Enter 4 to display updated data of the
customer" << endl;

```

```

        cout << "Enter 5 to search the data of customer " << endl; cin
        >> op;

        cout << "-----
-" << endl;

        if (op == 1)
        {
            input_info(x, 2);    int back;

            cout << "                Enter 0 to go back to the menu:";
            cin >> back;        if
(back == 0)

            {
                goto menu;
            }
        }

        if (op == 2)
        {
            display_info(x, 2);

            int back;

            cout << "                Enter 0 to go back to the menu:";
            cin >> back;

            if (back == 0)
            {

```



```

        goto menu;
    }
}

if (op == 3)
{
    string a;

    cout << "Enter name of the customer of which you want to updated data: ";

    cin >> a;

    edit_info(x, 2, a);

    int back;

    cout << "                Enter 0 to go back to the menu:";

    cin >> back;    if

(back == 0)

    {

        goto menu;

    }

}

if (op == 4)
{

    display_updated_info(x, 2);

    int back;

    cout << "                Enter 0 to go back to the menu:";

```

```

        cin >> back;

        if (back == 0)

        {

                goto menu;

        }

        }

        if (op == 5)

{

        string a;

        cout << "Enter name of the customer by which you want to search: ";

        cin >> a;

        search_info(x, 2, a);

        int back;

        cout << "                Enter 0 to go back to the menu:";

        cin >> back;        if

(back == 0)

        {

                goto menu;

        }

        }

}

void input_info(customer arr[], int j)

```

```

{
    for (int i = 0; i < j; i++)
    {
        cout << "Enter the name of the customer " << i + 1 << ":"; cin
        >> arr[i].Name;

        cout << "Enter the address of the customer " << i + 1 << ":";
        cin >> arr[i].Address; cout << "Enter the name of city in
        which the customer lives "

        << i + 1 << ":";

        cin >> arr[i].City;

        cout << "Enter the name of state in which the customer lives "
        << i + 1 << ":";

        cin >> arr[i].State;

        cout << "Enter the ZIP code " << i + 1 << ":";        cin >>
        arr[i].ZIP;

        cout << "Enter the Telephone number of the customer " << i +
        1 << ":";

        cin >> arr[i].Tel_Num;

        cout << "Enter the account balance of the customer " << i + 1
        << ":";

        cin >> arr[i].Account_Balance;

        cout << "Enter the date of last payment of the customer " << i
        + 1 << ":";
    }
}

```

```

        cin >> arr[i].Date_of_Last_Payment;

        cout << "-----" << endl;
    }
}

void edit_info(customer arr[],int j, string name)
{
    for (int i = 0; i < j; i++)
    {
        if (arr[i].Name == name)
        {
            cout << "Enter the address of the customer:";
            cin >> arr[i].Address;
            cout << "Enter the name of city in which the customer
lives:";

            cin >> arr[i].City;
            cout << "Enter the name of state in which the customer
lives:";

            cin >> arr[i].State;
            cout << "Enter the ZIP code:";
            cin >> arr[i].ZIP;
            cout << "Enter the Telephone number of the customer:";
            cin >> arr[i].Tel_Num;
            cout << "Enter the account balance of the customer:";
            cin >> arr[i].Account_Balance;

```

```

        cout << "Enter the date of last payment of the
customer:";

        cin >> arr[i].Date_of_Last_Payment;

    }
}

void display_info(customer arr[], int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "-----"
        << endl;

        cout << "          INFORMATION OF " << i + 1 << " CUSTOMER
" << endl;

        cout << "-----"
        << endl;

        cout << "NAME:" << arr[i].Name << endl;    cout << "ADSRESS:" <<
arr[i].Address << endl;    cout << "CITY:" << arr[i].City << endl;    cout <<
"STATE:" << arr[i].State << endl;    cout << "ZIP CODE" << arr[i].ZIP << endl;
        cout << "TELEPHONE NUMBER:" << arr[i].Tel_Num << endl;    cout <<
"ACCOUNT BALANCE:" << arr[i].Account_Balance << endl;

        cout << "DATE OF LAST PAYMENT:" <<
arr[i].Date_of_Last_Payment << endl;

    }
}

```

```

void display_updated_info(customer arr[], int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "-----"
        -" << endl;
        cout << "          UPDATED INFORMATION OF " << i + 1 << "
        CUSTOMER " << endl;
        cout << "-----"
        -" << endl;

        cout << "NAME:" << arr[i].Name << endl;    cout << "ADSRESS:" <<
        arr[i].Address << endl;    cout << "CITY:" << arr[i].City << endl;    cout <<
        "STATE:" << arr[i].State << endl;    cout << "ZIP CODE" << arr[i].ZIP << endl;
        cout << "TELEPHONE NUMBER:" << arr[i].Tel_Num << endl;    cout <<
        "ACCOUNT BALANCE:" << arr[i].Account_Balance << endl;

        cout << "DATE OF LAST PAYMENT:" <<
        arr[i].Date_of_Last_Payment << endl;
    }
}

void search_info(customer arr[],int j, string name)
{
    cout << "-----"
    -" << endl;

    cout << "          SEARCHED INFORMATION OF CUSTOMER "

```

```

<< endl;

cout << "-----"
-" << endl;

    for (int i = 0; i < j; i++)
    {
        if (name == arr[i].Name)
        {
            cout << "NAME:" << arr[i].Name << endl;
cout << "ADSRESS:" << arr[i].Address << endl;          cout <<
"CITY:" << arr[i].City << endl;          cout << "STATE:" << arr[i].State
<< endl;          cout << "ZIP CODE" << arr[i].ZIP << endl;

            cout << "TELEPHONE NUMBER:" << arr[i].Tel_Num
<< endl;

                cout << "ACCOUNT BALANCE:" << arr[i].Account_Balance <<
endl;

                    cout << "DATE OF LAST PAYMENT:" <<
arr[i].Date_of_Last_Payment << endl;
                }
            else
            {
                cout << "NO MATCH FOUND" << endl;
            }
        }
    }
}

```

## Output:

```
-----  
                                MENU  
-----  
Enter 1 to input the data of the customer  
Enter 2 to display data of the customer  
Enter 3 to edit the data of customer  
Enter 4 to display updated data of the customer  
Enter 5 to search the data of customer  
1  
-----  
Enter the name of the customer 1:abdullah  
Enter the address of the customer 1:aaa  
Enter the name of city in which the customer lives 1:lahore  
Enter the name of state in which the customer lives 1:pakistan  
Enter the ZIP code 1:43778  
Enter the Telephone number of the customer 1:9087675  
Enter the account balance of the customer 1:120000  
Enter the date of last payment of the customer 1:1-march-2021  
-----  
Enter the name of the customer 2:saad  
Enter the address of the customer 2:bb  
Enter the name of city in which the customer lives 2:lahore  
Enter the name of state in which the customer lives 2:pakistan  
Enter the ZIP code 2:45231  
Enter the Telephone number of the customer 2:908878  
Enter the account balance of the customer 2:320000  
Enter the date of last payment of the customer 2:130000  
-----  
                                Enter 0 to go back to the menu:  
-----
```

## Display the data of programme:



```
-----
                        INFORMATION OF 1 CUSTOMER
-----
NAME:abdullah
ADSRESS:aaa
CITY:lahore
STATE:pakistan
ZIP CODE43778
TELEPHONE NUMBER:9087675
ACCOUNT BALANCE:120000
DATE OF LAST PAYMENT:1-march-2021
-----
                        INFORMATION OF 2 CUSTOMER
-----
NAME:saad
ADSRESS:bb
CITY:lahore
STATE:pakistan
ZIP CODE45231
TELEPHONE NUMBER:908878
ACCOUNT BALANCE:320000
DATE OF LAST PAYMENT:130000
Enter 0 to go back to the menu:
```

### Updating the data:

```
Enter 1 to input the data of the customer
Enter 2 to display data of the customer
Enter 3 to edit the data of customer
Enter 4 to display updated data of the customer
Enter 5 to search the data of customer
3
-----
Enter name of the customer of which you want to updated data: abdullah
Enter the address of the customer:ccc
Enter the name of city in which the customer lives:islamabad
Enter the name of state in which the customer lives:pakistan
Enter the ZIP code:54000
Enter the Telephone number of the customer:6758989
Enter the account balance of the customer:230000
Enter the date of last payment of the customer:12-feb-2019
Enter 0 to go back to the menu:
```

### Displaying the updated data of customer

```

-----
                        UPDATED INFORMATION OF 1 CUSTOMER
-----
NAME:abdullah
ADSRESS:ccc
CITY:islamabad
STATE:pakistan
ZIP CODE54000
TELEPHONE NUMBER:6758989
ACCOUNT BALANCE:230000
DATE OF LAST PAYMENT:12-feb-2019
-----
                        UPDATED INFORMATION OF 2 CUSTOMER
-----
NAME:saadbb
ADSRESS:bb
CITY:lahore
STATE:pakistan
ZIP CODE45231
TELEPHONE NUMBER:908879
ACCOUNT BALANCE:320000
DATE OF LAST PAYMENT:12-jan-2022
Enter 0 to go back to the menu:

```

### Searching the customer by name:

```

Enter 1 to input the data of the customer
Enter 2 to display data of the customer
Enter 3 to edit the data of customer
Enter 4 to display updated data of the customer
Enter 5 to search the data of customer
5
-----
Enter name of the customer by which you want to search: saadbb
-----
                        SEARCHED INFORMATION OF CUSTOMER
-----
NO MATCH FOUND
NAME:saadbb
ADSRESS:bb
CITY:lahore
STATE:pakistan
ZIP CODE45231
TELEPHONE NUMBER:908879
ACCOUNT BALANCE:320000
DATE OF LAST PAYMENT:12-jan-2022
Enter 0 to go back to the menu:

```

## Programme: 9

```
#include<iostream> using
namespace std; struct
speaker

{
    string name;    string tel_num;
    string speaking_topic;    int fee_required
;

};

void input_info(speaker arr[], int j); void
edit_info(speaker arr[], int j, string n); void
display_info(speaker arr[], int j); void
display_updated_info(speaker arr[], int j); int
main()

{
    int op;    speaker x[2];

    menu:

    cout << "-----"
    -" << endl;

    cout << "                MENU                " << endl;

    cout << "-----" << endl;
```

```

        cout << "Enter 1 to input the data of the speaker" << endl; cout
        << "Enter 2 to display data of the speaker" << endl;

        cout << "Enter 3 to edit the data of speaker " << endl;    cout << "Enter
4 to display updated data of the speaker" << endl;

        cin >> op;

        cout << "-----
-" << endl;

        if (op == 1)
        {
            input_info(x, 2);    int
back;

            cout << "            Enter 0 to go back to the menu:";
            cin >> back;
if (back == 0)
    {
        goto menu;
    }
}

if (op == 2)
{
    display_info(x, 2);
    int back;

```

```

        cout << "                Enter 0 to go back to the menu:";
        cin >> back;

        if (back == 0)

        {

            goto menu;

        }

    }

    if (op == 3)

    {

        string a;

        cout << "Enter name of the speaker of which you want to updated
data:";

        cin >> a;

        edit_info(x, 2, a);

        int back;

        cout << "                Enter 0 to go back to the menu:";

        cin >> back;

        if (back == 0)

        {

            goto menu;

        }

    }

```

```

        if (op == 4)
        {
            display_updated_info(x, 2);
            int back;

            cout << "                Enter 0 to go back to the
menu:";

            cin >> back;

            if (back == 0)
            {
                goto menu;
            }
        }
    }

void input_info(speaker arr[], int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "-----
-" << endl;

        cout << "                INFORMATION OF " << i + 1 << " SPEAKER" << endl;

        cout << "-----
-" << endl;
    }
}

```

```

        cout << "Enter the name of the speaker:";   cin >>
arr[i].name;

        cout << "Enter the telephone number of the speaker:";   cin >>
arr[i].tel_num;

        cout << "Enter the topic of the speech:";
            cin >> arr[i].speaking_topic;

            cout << "Enter the fee required for the speaker:";

            cin >> arr[i].fee_required;

        }

    }

void edit_info(speaker arr[], int j, string n)
{
    cout << "-----"
    -" << endl;

        cout << "          UPDATE INFORMATION OF SPEAKER" << endl;

    cout << "-----"
    -" << endl;

        for (int i = 0; i < j; i++)
        {
            if (arr[i].name == n)
            {

                cout << "Enter the telephone number of the speaker:";           cin >>
arr[i].tel_num;

```

```

        cout << "Enter the topic of the speach:";          cin
>> arr[i].speaking_topic;

        cout << "Enter the fee required for the speaker:";      cin >>
arr[i].fee_required;

    }

}

void display_info(speaker arr[], int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "-----"
        << endl;

        cout << "          INFORMATION OF " << i + 1 << " SPEAKER"
        << endl;

        cout << "-----"
        << endl;

        cout << "NAME:" << arr[i].name << endl;    cout << "TELEPHONE
NUMBER:" << arr[i].tel_num << endl;      cout << "SPEAKING TOPIC:" <<
arr[i].speaking_topic << endl;    cout << "FEE REQUIRED:" << arr[i].fee_required
        << endl;

    }

}

```



```

void display_updated_info(speaker arr[], int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "-----"
        -" << endl;

        cout << "          UPDATED INFORMATION OF " << i + 1 << " SPEAKER" << endl;
        cout << "-----"
        -" << endl;

        cout << "NAME:" << arr[i].name << endl;    cout << "TELEPHONE
NUMBER:" << arr[i].tel_num << endl;    cout << "SPEAKING TOPIC:" <<
arr[i].speaking_topic << endl;    cout << "FEE REQUIRED:" << arr[i].fee_required
<< endl;

    }
}

```

**Output:**

```
MENU
```

---

```
Enter 1 to input the data of the speaker  
Enter 2 to display data of the speaker  
Enter 3 to edit the data of speaker  
Enter 4 to display updated data of the speaker  
1
```

---

```
INFORMATION OF 1 SPEAKER
```

---

```
Enter the name of the speaker:abdul  
Enter tha telephone number of the speaker:9075477  
Enter the topic of the speach:climate-change  
Enter the fee requied for the speaker:1000
```

---

```
INFORMATION OF 2 SPEAKER
```

---

```
Enter the name of the speaker:abdullah  
Enter tha telephone number of the speaker:6745730  
Enter the topic of the speach:globle-relations  
Enter the fee requied for the speaker:2500
```

```
Enter 0 to go back to the menu:
```

```

-----
                                MENU
-----
Enter 1 to input the data of the speaker
Enter 2 to display data of the speaker
Enter 3 to edit the data of speaker
Enter 4 to display updated data of the speaker
3
-----
Enter name of the speaker of which you want to updated data:saad
-----
                                UPDATE INFORMATION OF SPEAKER
-----
                                Enter 0 to go back to the menu:0
-----
                                MENU
-----
Enter 1 to input the data of the speaker
Enter 2 to display data of the speaker
Enter 3 to edit the data of speaker
Enter 4 to display updated data of the speaker
4
-----
                                UPDATED INFORMATION OF 1 SPEAKER
-----
NAME:abdul
TELEPHONE NUMBER:9075477
SPEAKING TOPIC:climate-change
FEE REQUIRED:1000
-----
                                UPDATED INFORMATION OF 2 SPEAKER
-----
NAME:abdullah
TELEPHONE NUMBER:6745730
SPEAKING TOPIC:globle-relations
FEE REQUIRED:2500
                                Enter 0 to go back to the menu:

```

## Programme:10

```

#include<iostream> using
namespace std; struct
speaker
{
    string name;    string tel_num;
    string speaking_topic;    int fee_required
;

};

void input_info(speaker arr[], int j); void
edit_info(speaker arr[], int j, string n); void
display_info(speaker arr[], int j); void
display_updated_info(speaker arr[], int j); void
search_info(speaker arr[], int j, string name); int
main()

{
    int op;

    speaker x[2]; menu:

    cout << "-----
-" << endl;

    cout << "          MENU          " << endl; cout << "-----
-----

-" << endl;

```

```

        cout << "Enter 1 to input the data of the speaker" << endl;    cout <<
"Enter 2 to display data of the speaker" << endl;    cout << "Enter 3 to edit the
data of speaker " << endl;

        cout << "Enter 4 to display updated data of the speaker" <<
endl;

        cout << "Enter 5 to search the data of speaker " << endl;

        cin >> op;

        cout << "-----
-" << endl;

        if (op == 1)
        {
            input_info(x, 2);    int back;

            cout << "                Enter 0 to go back to the menu:";
            cin >> back;        if
(back == 0)

            {
                goto menu;
            }
        }

        if (op == 2)
        {
            display_info(x, 2);

```

```

        int back;

        cout << "                Enter 0 to go back to the menu:";

        cin >> back;        if
(back == 0)

        {
                goto menu;

        }

    }

    if (op == 3)
    {
        string a;

        cout << "Enter name of the speaker you want to edit the data:";

        cin >> a;

        edit_info(x, 2, a);

        int back;

        cout << "                Enter 0 to go back to the menu:";

        cin >> back;        if
(back == 0)

        {
                goto menu;

        }

    }

```

```

        if (op == 4)
        {
            display_updated_info(x, 2);

            int back;

            cout << "                Enter 0 to go back to the menu:";

            cin >> back;            if
(back == 0) {

                                goto menu;

            }

        }

        if (op == 5)
        {
            string a;

            cout << "Enter name of the speaker by which you want to search: ";

            cin >> a;

            search_info(x, 2, a);

            int back;

            cout << "                Enter 0 to go back to the menu:";

            cin >> back;            if
(back == 0)

            {

                goto menu;

```

```

    }
}

void input_info(speaker arr[], int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "-----"
        -" << endl;

        cout << "          INFORMATION OF " << i + 1 << " SPEAKER"
        << endl;

        cout << "-----"
        -" << endl;

        cout << "Enter the name of the speaker:";   cin >>
        arr[i].name;

        cout << "Enter tha telephone number of the speaker:";   cin >>
        arr[i].tel_num;

        cout << "Enter the topic of the speach:";   cin >>
        arr[i].speaking_topic;

        cout << "Enter the fee requied for the speaker:";   cin >>
        arr[i].fee_requied;

    }
}

```



```

}

void edit_info(speaker arr[], int j, string n)
{
    cout << "-----"
    << endl;

    cout << "          UPDATE INFORMATION OF SPEAKER" << endl;

    cout << "-----"
    << endl;

    for (int i = 0; i < j; i++)
    {
        if (arr[i].name == n)
        {
            cout << "Enter the telephone number of the speaker:";    cin >>
            arr[i].tel_num;

            cout << "Enter the topic of the speech:";    cin
            >> arr[i].speaking_topic;

            cout << "Enter the fee required for the speaker:";    cin >>
            arr[i].fee_required;

        }

    }

}

void display_info(speaker arr[], int j)

```

```

{
    for (int i = 0; i < j; i++)
    {
        cout << "-----"
        << endl;

        cout << "          INFORMATION OF " << i + 1 << " SPEAKER"
        << endl;

        cout << "-----"
        << endl;

        cout << "NAME:" << arr[i].name << endl;    cout << "TELEPHONE
        NUMBER:" << arr[i].tel_num << endl;        cout << "SPEAKING TOPIC:" <<
        arr[i].speaking_topic << endl;    cout << "FEE REQUIRED:" << arr[i].fee_required
        << endl;

        }
    }

void display_updated_info(speaker arr[], int j)
{
    for (int i = 0; i < j; i++)
    {
        cout << "-----"
        << endl;

        cout << "          UPDATED INFORMATION OF " << i + 1 << " SPEAKER" << endl;

        cout << "-----"
        << endl;
    }
}

```

```

        cout << "NAME:" << arr[i].name << endl;    cout << "TELEPHONE
NUMBER:" << arr[i].tel_num << endl;    cout << "SPEAKING TOPIC:" <<
arr[i].speaking_topic << endl;    cout << "FEE REQUIRED:" << arr[i].fee_required
<< endl;

    }

}

void search_info(speaker arr[], int j, string name)
{
    cout << "-----
-" << endl;

    cout << "          SEARCHED INFORMATION OF CUSTOMER "
<< endl;

    cout << "-----
-" << endl;

        for (int i = 0; i < j; i++) {
            if (name == arr[i].name)
            {
                cout << "NAME:" << arr[i].name << endl;
                cout << "TELEPHONE NUMBER:" << arr[i].tel_num <<
endl;

                cout << "SPEAKING TOPIC:" << arr[i].speaking_topic <<
endl;

                cout << "FEE REQUIRED:" << arr[i].fee_required << endl;

            }
        }
}

```

```

                                INFORMATION OF 1 SPEAKER
-----
NAME:abdul
TELEPHONE NUMBER:2357479088
SPEAKING TOPIC:terrorism
FEE REQUIRED:1500
-----
                                INFORMATION OF 2 SPEAKER
-----
NAME:saad
TELEPHONE NUMBER:45667577768
SPEAKING TOPIC:education
FEE REQUIRED:5000
                                Enter 0 to go back to the menu:0
-----
                                MENU
-----
Enter 1 to input the data of the speaker
Enter 2 to display data of the speaker
Enter 3 to edit the data of speaker
Enter 4 to display updated data of the speaker
Enter 5 to search the data of speaker
3
-----
Enter name of the speaker you want to edit the data:abdullah
-----
                                UPDATE INFORMATION OF SPEAKER
-----
                                Enter 0 to go back to the menu:0
-----
Enter 3 to edit the data of speaker
Enter 4 to display updated data of the speaker
Enter 5 to search the data of speaker
2
-----
}

```

**Output:**

```

Enter 1 to input the data of the speaker
Enter 2 to display data of the speaker
Enter 3 to edit the data of speaker
Enter 4 to display updated data of the speaker
Enter 5 to search the data of speaker
4
-----
                        UPDATED INFORMATION OF 1 SPEAKER
-----
NAME:abdul
TELEPHONE NUMBER:2357479088
SPEAKING TOPIC:terrorism
FEE REQUIRED:1500
-----
                        UPDATED INFORMATION OF 2 SPEAKER
-----
NAME:saad
TELEPHONE NUMBER:45667577768
SPEAKING TOPIC:education
FEE REQUIRED:5000
                        Enter 0 to go back to the menu:0
-----
                        MENU
-----
Enter 1 to input the data of the speaker
Enter 2 to display data of the speaker
Enter 3 to edit the data of speaker
Enter 4 to display updated data of the speaker
Enter 5 to search the data of speaker
5
-----
Enter name of the speaker by which you want to search: abdul
-----
                        SEARCHED INFORMATION OF CUSTOMER
-----
NAME:abdul
TELEPHONE NUMBER:2357479088
SPEAKING TOPIC:terrorism
FEE REQUIRED:1500
                        Enter 0 to go back to the menu:

```

## **Programme:11**

```
#include<iostream> using
namespace std; struct
monthly_budget

{
    float housing, utlities, household_expenses, transpotation, food, medical,
insurance, entertainment,
    clothing,miscellaneous;
};

void input(monthly_budget a);
void report(monthly_budget x, monthly_budget y); int
main()

{
    monthly_budget a;    monthly_budget x{};

    a.housing = 5.00;
    a.utlities = 150;
    a.household_expenses = 65.0;
    a.transpotation = 50.0;
    a.food = 250.0;
    a.medical = 30.0;
    a.insurance = 100.0;
    a.entertainment = 150.0;
    a.clothing = 75.0;
```

```

        a.miscellaneous = 50.0;

        input(x);
        report(x, a);
    }

void input(monthly_budget a)
{
    cout << "Enter the monthly housing expense:";    cin >>
a.housing;

    cout << "Enter the monthly utilities expense:";    cin >>
a.utilities;

    cout << "Enter the monthly household expenses expense:";    cin >>
a.household_expenses;

    cout << "Enter the monthly transpotation expense:";    cin >>
a.transpotation;

    cout << "Enter the monthly food expense:";
    cin >> a.food;

    cout << "Enter the monthly medical expense:";    cin >>
a.medical;

    cout << "Enter the monthly insurance expense:";    cin >>
a.insurance;

```

```
        cout << "Enter the monthly entertainment expense:";    cin >>
a.entertainment;
```

```
        cout << "Enter the monthly clothing expense:";    cin >>
a.clothing;
```

```
        cout << "Enter the monthly miscellaneous expense:";    cin >>
a.miscellaneous;
```

```
    }
    void report(monthly_budget x,monthly_budget y)
```

```
{
```

```
    float z;
```

```
    z = y.housing - x.housing;    if
(y.housing > x.housing)
```

```
    {
        cout << "OVER BUDGET FOR HOUSING" << endl;    cout << z <<
endl;
```

```
    }
```

```
    else
```

```
    {
        cout << "UNDER AMOUNT" << endl;    cout << z <<
endl;
```

```
    }
```



```

        z = y.utlities - x.utlities;  if (y.utlities
> x.utlities)

    {
        cout << "OVER BUDGET FOR UTLITIES" << endl;    cout << z <<
endl;

    }

        else

        {
            cout << "UNDER AMOUNT" << endl;

            cout << z << endl;
        }

        z = y.household_expenses - x.household_expenses; if
        (y.household_expenses > x.household_expenses)

        {

            cout << "OVER BUDGET FOR HOUSEHOLD EXPENSE" << endl;    cout << z <<
endl;

        }

        else

        {

            cout << "UNDER AMOUNT" << endl;    cout << z <<
endl;

```

```

    }

    z = y.transpotation - x.transpotation; if
(y.transpotation > x.transpotation)

    {
        cout << "OVER BUDGET FOR TRANSPOTATION" << endl;        cout << z
<< endl;

    }

else

{

    cout << "UNDER AMOUNT" << endl;
    cout << z << endl;

}

    z = y.medical - x.medical;
        if (y.medical > x.medical)

    {

        cout << "OVER BUDGET FOR MEDICAL" << endl;
        cout << z << endl;

    }

else

{

    cout << "UNDER AMOUNT" << endl;    cout << z <<
endl;

```

```

    }

    z = y.food - x.food;      if
(y.food > x.food)

    {
        cout << "OVER BUDGET FOR FOOD" << endl;      cout << z
<< endl;

    }

    else

    {
        cout << "UNDER AMOUNT" << endl;  cout << z <<
endl;

        }

        z = y.insurance - x.insurance; if
(y.insurance > x.insurance)

        {
            cout << "OVER BUDGET FOR INSURANCE" << endl;
            cout << z << endl;

        }

        else

        {
            cout << "UNDER AMOUNT" << endl;

```

```

    }

    z = y.entertainment - x.entertainment;    if
        (y.entertainment > x.entertainment)

    {
        cout << "OVER BUDGET FOR ENTERTAINMENT" << endl;    cout << z
<< endl;

    }

    else

    {
        cout << "UNDER AMOUNT" << endl;    cout << z <<
endl;

    }

    z = y.clothing - x.clothing;    if
(y.clothing > x.clothing)

    {
        cout << "OVER BUDGET FOR CLOTHING" << endl;
        cout << z << endl;

    }
    else

    {

        cout << "UNDER AMOUNT" << endl;

```

```

        cout << z << endl;
    }

    z = y.miscellaneous - x.miscellaneous;        if
(y.miscellaneous > x.miscellaneous)

    {
        cout << "OVER BUDGET FOR MISCELLANEOUS" << endl;        cout << z
<< endl;

    }

    else

    {
        cout << "UNDER AMOUNT" << endl;    cout << z <<
endl;

    }

}

```

**Output:**

```
Enter the monthly food expense:20000
Enter the monthly medical expense:5000
Enter the monthly insurance expense:3000
Enter the monthly entertainment expense:10000
Enter the monthly clothing expense:20000
Enter the monthly miscellaneous expense:13000
OVER BUDGET FOR HOUSING
5
OVER BUDGET FOR UTILITIES
150
OVER BUDGET FOR HOUSEHOLD EXPENSE
65
OVER BUDGET FOR TRANSPOTATION
50
OVER BUDGET FOR MEDICAL
30
OVER BUDGET FOR FOOD
250
OVER BUDGET FOR INSURANCE
100
OVER BUDGET FOR ENTERTAINMENT
150
OVER BUDGET FOR CLOTHING
75
OVER BUDGET FOR MISCELLANEOUS
50

-----
Process exited after 60.14 seconds with return value 0
Press any key to continue . . .
```

## **Programme :12**

```
#include <iostream>
```

```
#include <cstring>
```

```
#include <cstdlib>
```

```
#include <iomanip>
```

```
using namespace std;
```

```
const int MAX_NAME_LENGTH = 50;
```

```
struct Member { char
```

```
name[MAX_NAME_LENGTH];
```

```
    int id; int
```

```
num; int*
```

```
tests; float
```

```
average; char
```

```
grade;
```

```
};
```

```
int main() { int numStudents; cout <<
```

```
"Enter the number of students: "; cin >>
```

```
numStudents;
```

```
Member* students = new Member[numStudents]; for (int i = 0; i < numStudents; i++) {    cout
<< "Enter the name of student " << i+1 << ": ";    cout << "Enter the ID number of student " <<
i+1 << ": ";    cin >> students[i].id;
```

```
    cout << "Enter the number of tests for student " << i+1 << ": ";
```

```
    cin >> students[i].num;    students[i].tests = new
```

```
    int[students[i].num];
```

```
    cout << "Enter the test scores for student " << i+1 << ": ";
```

```
    int sum = 0;    for (int j = 0; j < students[i].num; j++) {
```

```
        cin >> students[i].tests[j];    sum += students[i].tests[j];
```

```
    }
```

```
    students[i].average = (float)sum / students[i].num;
```

```
    if (students[i].average >= 91) {
```

```
        students[i].grade = 'A';
```

```
    } else if (students[i].average >= 81) {
```

```
        students[i].grade = 'B';
```

```
    } else if (students[i].average >= 71) {
```

```
        students[i].grade = 'C';
```



```

    } else if (students[i].average >= 61) {

    } else {
students[i].grade = 'E';

    }

}

cout << endl << "Name" << setw(20) << "ID" << setw(20) << "Average" << setw(20) <<
"Grade" << endl; for (int i = 0; i < numStudents; i++) {    cout << students[i].name <<
setw(20) << students[i].id << setw(20) << setprecision(2) << fixed << students[i].average
<< setw(20) << students[i].grade << endl;

}

// Deallocate memory for (int i = 0; i
< numStudents; i++) {    delete[]
students[i].tests;

} delete[]
students; return
0;

}

```

**Output:**

```
C:\Riphah University\Devv Trash\assignment#4.exe
Enter the number of students: 5
Enter the name of student 1: A1
Enter the ID number of student 1: 1234
Enter the number of tests for student 1: 2
Enter the test scores for student 1: 10 20
Enter the name of student 2: A2
Enter the ID number of student 2: 1245
Enter the number of tests for student 2: 2
Enter the test scores for student 2: 10 30
Enter the name of student 3: A3
Enter the ID number of student 3: 1267
Enter the number of tests for student 3: 2
Enter the test scores for student 3: 10 20
Enter the name of student 4: A4
Enter the ID number of student 4: 1256
Enter the number of tests for student 4: 2
Enter the test scores for student 4: 20 10
Enter the name of student 5: A5
Enter the ID number of student 5: 4321
Enter the number of tests for student 5: 2
Enter the test scores for student 5: 20 30

Name           ID           Average           Grade
A1             1234          15.00            E
A2             1245          20.00            E
A3             1267          15.00            E
A4             1256          15.00            E
A5             4321          25.00            E
-----
```

## **Programme:13**

```
#include <iostream>
```

```
using namespace std;
```

```
struct HourlyPaidWorker {
```

```
    int hoursWorked;
```

```
    double hourlyRate;
```

```
};
```

```
struct SalariedWorker {
```

```
    double salary;
```

```
    double bonus;
```

```
};
```

```
union Worker {
```

```
    HourlyPaidWorker hourlyWorker;
```

```
    SalariedWorker salariedWorker;
```

```
};
```

```
int main() {
```

```
    Worker worker;
```

```
    cout << "Are you calculating pay for an hourly paid worker or a salaried worker? (Enter 'hourly'  
or 'salaried'): ";
```

```
    string workerType;
```

```
    cin >> workerType;
```

```
    if (workerType == "hourly") {
```

```
        cout << "Enter number of hours worked: ";
```

```
        cin >> worker.hourlyWorker.hoursWorked;
```

```
        while (worker.hourlyWorker.hoursWorked < 0 || worker.hourlyWorker.hoursWorked > 80) {
```

```
    cout << "Invalid input. Enter a number between 0 and 80: ";

    cin >> worker.hourlyWorker.hoursWorked;

}

cout << "Enter hourly rate: ";

cin >> worker.hourlyWorker.hourlyRate;

while (worker.hourlyWorker.hourlyRate < 0) {

    cout << "Invalid input. Enter a positive number: ";

    cin >> worker.hourlyWorker.hourlyRate;

}

double pay = worker.hourlyWorker.hoursWorked * worker.hourlyWorker.hourlyRate;

cout << "Pay for hourly paid worker: $" << pay << endl;

}

else if (workerType == "salaried") {

    cout << "Enter salary: ";

    cin >> worker.salariedWorker.salary;

    while (worker.salariedWorker.salary < 0) {

        cout << "Invalid input. Enter a positive number: ";

        cin >> worker.salariedWorker.salary;
```

```
}
```

```
cout << "Enter bonus: ";
```

```
cin >> worker.salariedWorker.bonus;
```

```
while (worker.salariedWorker.bonus < 0) {
```

```
    cout << "Invalid input. Enter a positive number: ";
```


```
    cin >> worker.salariedWorker.bonus;
```

```
}
```

```
}
```

```
}
```

## OUTPUT

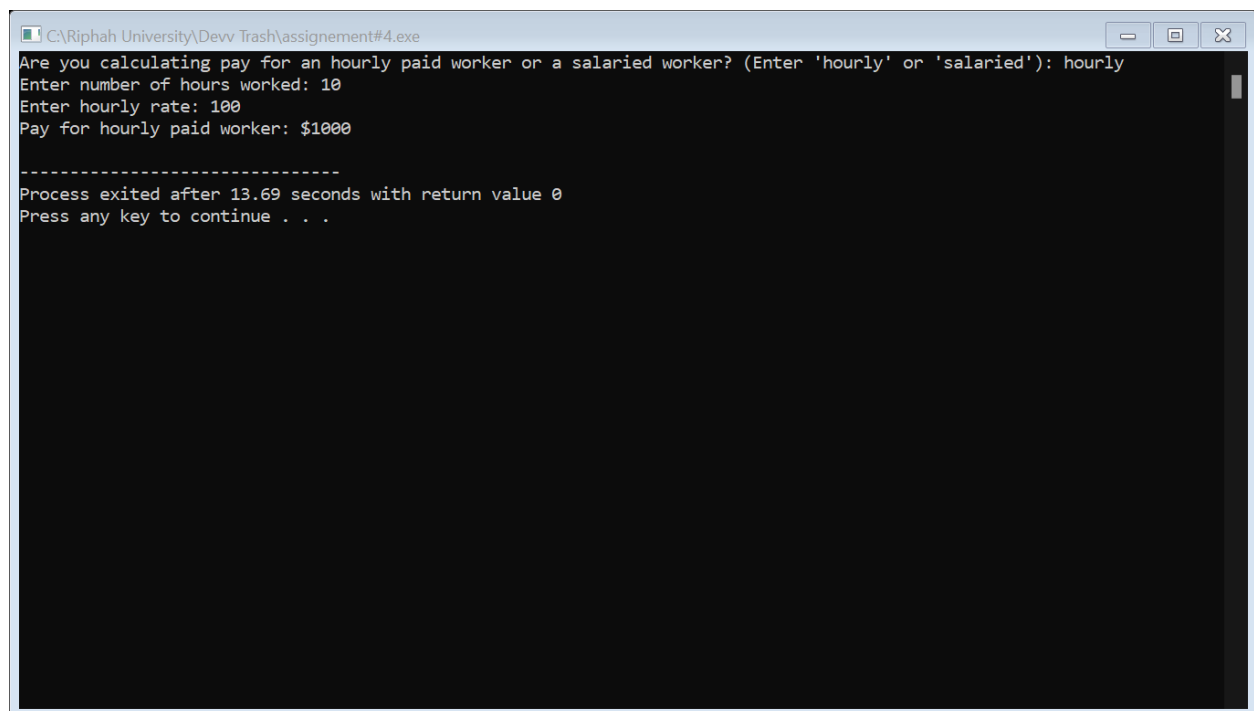

```
C:\Riphah University\Devv Trash\assignment#4.exe
Are you calculating pay for an hourly paid worker or a salaried worker? (Enter 'hourly' or 'salaried'): hourly
Enter number of hours worked: 10
Enter hourly rate: 100
Pay for hourly paid worker: $1000
-----
Process exited after 13.69 seconds with return value 0
Press any key to continue . . .
```

```
Are you calculating pay for an hourly paid worker or a salaried worker? (Enter 'hourly' or 'salaried'): hourly
Enter number of hours worked: 12
Enter hourly rate: 200
Pay for hourly paid worker: $2400
```

```
-----
Process exited after 15.78 seconds with return value 0
Press any key to continue . . .
```