

CLIENT SIDE SCRIPTING (22519)

Practical No. 11: Develop a webpage for placing the window on the screen and working with child window.

Roll No.: 220447

1) Write a program to create a child window from a parent window. Shift focus to child window.

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Cookies</title>
    <link rel="stylesheet" href="style.css">
</head>
<body>
    <h1>This is a Parent Window</h1>
    <button onclick="createWindow()">Create Child Window</button>
<script>
    function createWindow(){
        var childWindow = window.open("", "", "width=250, height=200");
        var text = `<h2> This is a Child Window </h2>`;
        childWindow.document.write(text);
    }
</script>
</body>
</html>
```

This is a Parent Window

Create Child Window

This is a Parent Window

Create Child Window



CLIENT SIDE SCRIPTING (22519)

Practical No. 11: Develop a webpage for placing the window on the screen and working with child window.

Roll No.: 220447

2) Write a program for accessing elements of child window.

index.html

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport"
content="width=device-width,
initial-scale=1.0">
    <title>Window Object</title>
    <link rel="stylesheet"
href="style.css">
</head>
<body>
    <label for="msg">Enter message
</label>
    <input type="text" name="msg"
id="msg" style="width:250px;">
<br>
    <button id="send"
onclick="sendMsg()">Send</button>
<br>
    <button
onclick="createWindow()">Open
New Window</button>
<script>
    var newWindow;
    function createWindow(){
        newWindow =
window.open("demo.html");
```

```
        window.focus();
    }
    function sendMsg(){
        if(newWindow==null ||
newWindow.closed){
            alert("Open a New
Window First");
            return;
        }
        var msg =
document.getElementById('msg').v
alue;
        if(msg=="")
            alert("Enter
message!!");
        else{
            newWindow.document.getElementBy
Id('msg').value = msg;
            newWindow.focus();
            alert("Message
Recieved!");
        }
    }
</script>
</body>
</html>
```

demo.html

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Child Window</title>
    <link rel="stylesheet" href="style.css">
</head>
<body>
    <h4> New Message </h4>
    <input type="text" value="" id="msg" style="width:250px;" readonly>
</body>
</html>
```

CLIENT SIDE SCRIPTING (22519)

Practical No. 11: Develop a webpage for placing the window on the screen and working with child window.

Roll No.: 220447

Enter message

Summon to Ubuyashiki Mansion

Send

Open New Window

Enter message

Summon to Ubuyashiki Mansion

Send

Open New Window

127.0.0.1:3002 says

Open a New Window First

OK

Window Object

Child Window

127.0.0.1:3002/demo.html

New Message

New Message

Summon to Ubuyashiki Mansion

3) Write a Program to use the Browser Object (Location Object) in JavaScript.


```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Window Object</title>
  <link rel="stylesheet" href="style.css">
</head>
<body>
  <button onclick="printLocation()">Print Location Coords</button>
<script>
function printLocation(){
  if(navigator.geolocation){
    navigator.geolocation.getCurrentPosition(showPosition);
  }
}
```

CLIENT SIDE SCRIPTING (22519)

Practical No. 11: Develop a webpage for placing the window on the screen and working with child window.

Roll No.: 220447

```
        else{
            document.write("GeoLocation not supported by the Browser");
        }
    }
    function showPosition(position){
        let text = `Latitude : ${position.coords.latitude} <br> Longitude :
    ${position.coords.longitude}`;
        document.write(text);
    }
</script>
</body>
</html>
```

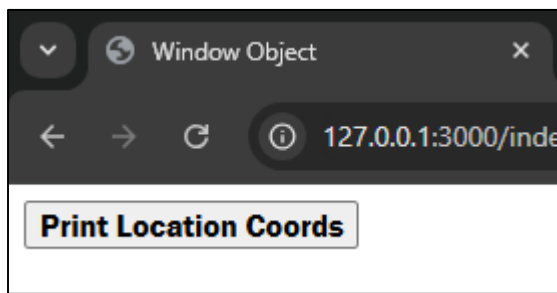

Latitude : 19.1408257
Longitude : 72.863352

4) Write a Program to use the Browser Object (Window Object) in JavaScript. Use all function related to window object.

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Window Object</title>
    <link rel="stylesheet" href="style.css">
</head>
<body>
    <button onclick="createWindow()">Create Window</button>
    <button onclick="moveto()">Move To</button>
    <button onclick="moveby()">Move By</button>
    <button onclick="resizeto()">Resize To</button>
    <button onclick="resizeby()">Resize By</button>
    <button onclick="scrollto()">Scroll To</button>
    <button onclick="scrollby()">Scroll By</button>
<script>
    var win;
    function createWindow(){
        win = window.open("", "win", "width=200px, height=150px");
        win.document.write("<h4> I am Child Window😊");
    }
    function moveto(){
```



CLIENT SIDE SCRIPTING (22519)

Practical No. 11: Develop a webpage for placing the window on the screen and working with child window.

Roll No.: 220447

```
var coord = prompt("Enter values separated by space");
win.moveTo(coord.split(" ")[0], coord.split(" ")[1]);
win.focus();
}
function moveby(){
    var coord = prompt("Enter values separated by space");
    win.moveBy(coord.split(" ")[0], coord.split(" ")[1]);
    win.focus();
}
function resizeto(){
    var coord = prompt("Enter values separated by space");
    win.resizeTo(coord.split(" ")[0], coord.split(" ")[1]);
    win.focus();
}
function resizeby(){
    var coord = prompt("Enter values separated by space");
    win.resizeBy(coord.split(" ")[0], coord.split(" ")[1]);
    win.focus();
}
function scrollto(){
    var coord = prompt("Enter values separated by space");
    win.scrollTo(coord.split(" ")[0], coord.split(" ")[1]);
    win.focus();
}
function scrollby(){
    var coord = prompt("Enter values separated by space");
    win.scrollBy(coord.split(" ")[0], coord.split(" ")[1]);
    win.focus();
}
</script>
</body>
</html>
```

moveTo(200,200)

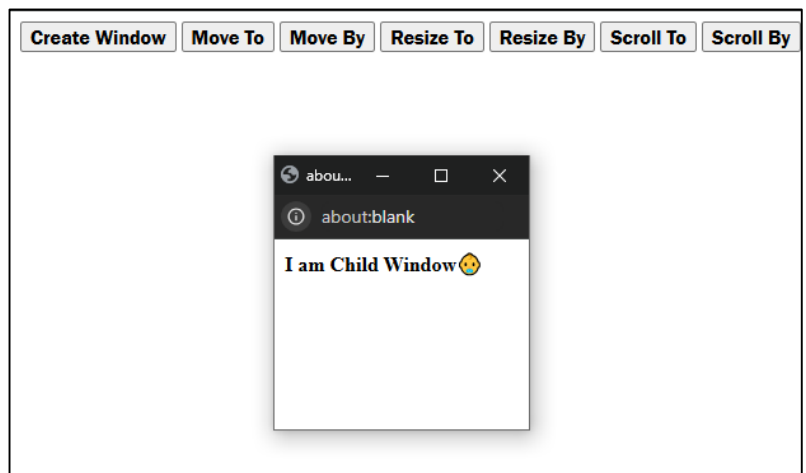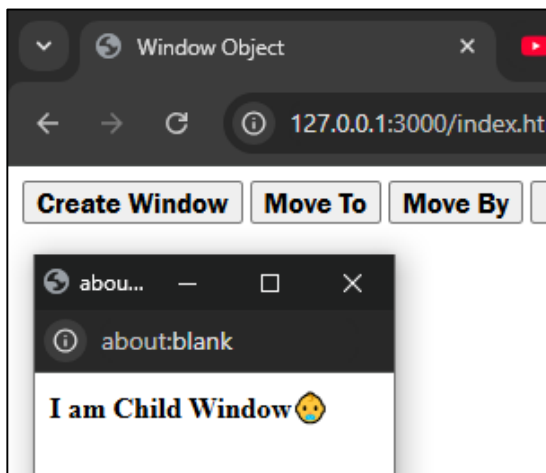


CLIENT SIDE SCRIPTING (22519)


Practical No. 11: Develop a webpage for placing the window on the screen and working with child window.

Roll No.: 220447


moveBy(-100,-100)

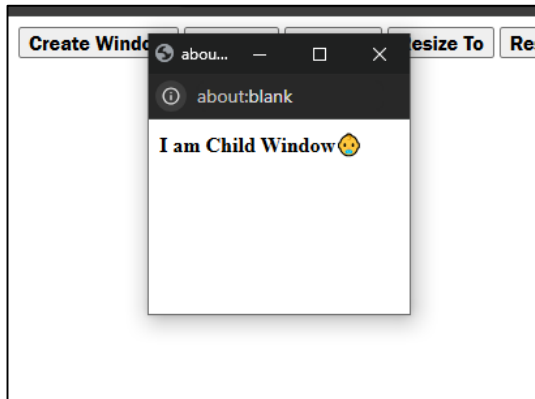

resizeTo(400,400)

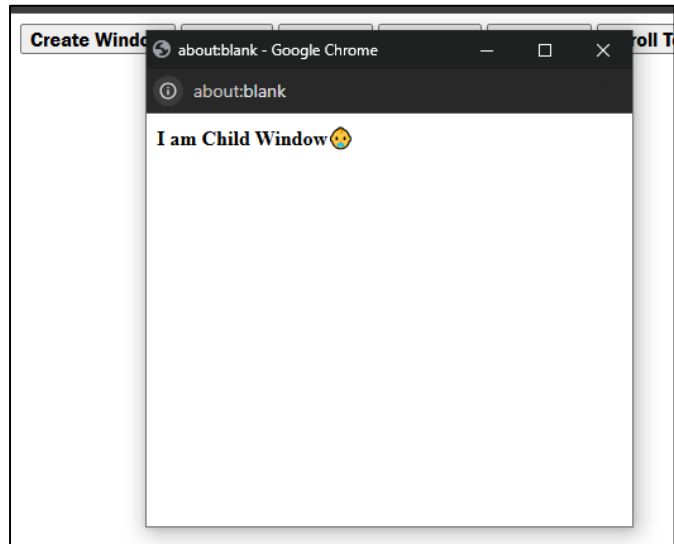


resizeBy(-300,-300)

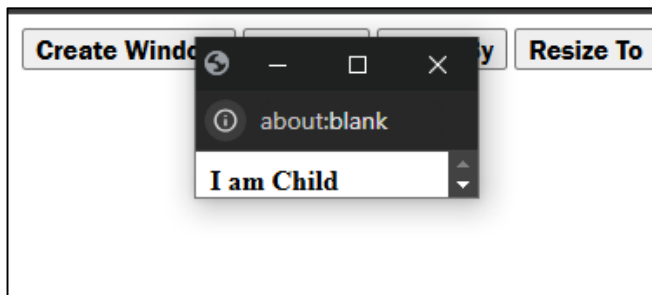


```
//writing this in console to able  
scrolling  
var text = "Hello ";  
for(var i=0;i<4;i++){  
    text+=text;  
}  
win.document.write(document.body.textCont  
ent + "<br>" + text);
```

scrollBy(-20, -100)

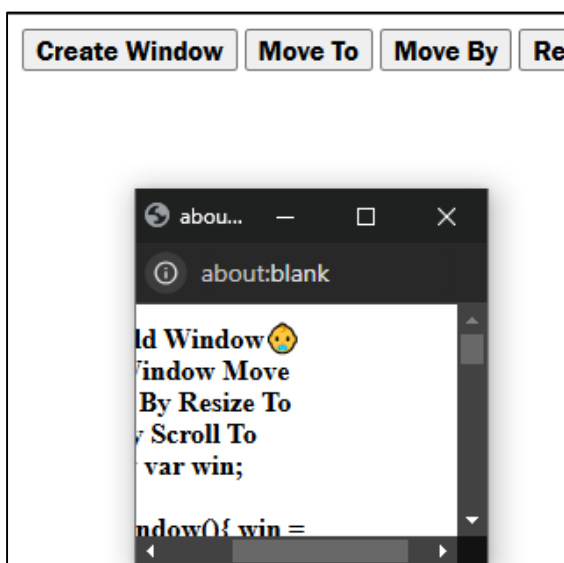

scrollTo(200,30)

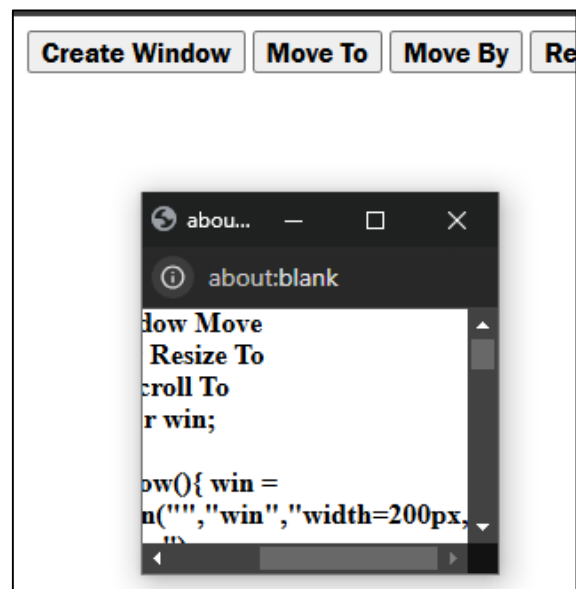

CLIENT SIDE SCRIPTING (22519)

Practical No. 11: Develop a webpage for placing the window on the screen and working with child window.

Roll No.: 220447

5) Write a Program to use the History Object in JavaScript

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Window Object</title>
    <link rel="stylesheet" href="style.css">
</head>
<body>
    <h2>History Object in JavaScript</h2>
    <h5 style="margin:20px auto"></h5>
    <h4> history.length Property</h4>
    <h5 style="margin-top:20px;"></h5>
<script>
    var h5 = document.getElementsByTagName('h5');
    h5[0].textContent = history;
    h5[1].textContent = history.length;
</script>
</body>
</html>
```

History Object in JavaScript

[object History]

history.length Property

2