

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/282464007>

# Urinary System Diseases Diagnosis Using Machine Learning Techniques

Article in *International Journal of Intelligent Systems Technologies and Applications* · April 2015

DOI: 10.5815/ijisa.2015.05.01

---

CITATIONS

3

READS

910

1 author:



**Seyyid Ahmed Medjahed**

University of Sciences and Technology Oran (USTO), Mohamed Boudiaf, Algeria

20 PUBLICATIONS 328 CITATIONS

SEE PROFILE

Some of the authors of this publication are also working on these related projects:



Speech recognition [View project](#)

# Urinary System Diseases Diagnosis Using Machine Learning Techniques

**Seyyid Ahmed Medjahed**

University of Sciences and Technology Mohamed Boudiaf USTO-MB, Faculty of Mathematics and Computer Science,  
Oran, 31000, Algeria  
Email: sa.medjahed@gmail.com

**Tamazouzt Ait Saadi**

University of Havre, Havre, 76600, France  
Email: tamazouzt.ait.saadi@univ-lehavre.fr

**Abdelkader Benyettou**

University of Sciences and Technology Mohamed Boudiaf USTO-MB, Faculty of Mathematics and Computer Science,  
Oran, 31000, Algeria  
Email: aek.benyettou@univ-usto.dz

**Abstract**—The urinary system is the organ system responsible for the production, storage and elimination of urine. This system includes kidneys, bladder, ureters and urethra. It represents the major system which filters the blood and any imbalance of this organ can increase the rate of being infected with diseases. The aim of this paper is to evaluate the performance of different variants of Support Vector Machines and k-Nearest Neighbor with different distances and try to achieve a satisfactory rate of diagnosis (infected or non-infected urinary system). We consider both diseases that affect the urinary system: inflammation of urinary bladder and nephritis of renal pelvis origin. Our experimentation will be conducted on the database “Acute Inflammations Data Set” obtained from UCI Machine Learning Repository. We use the following measures to evaluate the results: classification accuracy rate, classification time, sensitivity, specificity, positive and negative predictive values.

**Index Terms**— Urinary System, Diagnosis, Support Vector Machine, k-Nearest Neighbor, Distance.

## I. INTRODUCTION

Machine learning is the scientific discipline concerned with the development, analysis and implementation of automated methods that allow to a machine to evolve through a learning process, and so fulfill the tasks that are difficult or impossible to fill by more conventional algorithmic means.

Learning algorithms can be categorized according to the learning mode: supervised learning, unsupervised learning and semi-supervised learning.

Supervised learning is widely used in the medical field as an ensemble of methods for the medical diagnosis to help the doctor and to get a better diagnosis. Among these methods are: Support Vector Machines, Neuron Network, k-Nearest Neighbor, etc.

Many researchers have developed expert systems to solve complex problems of medical diagnosis (such as cancer diagnosis [1], [2], acute inflammation in urinary

system diagnosis [3], [4], etc.) by reasoning about knowledge and also by using different learning methods.

Support vector machine and k-nearest neighbor have been widely used in medical diagnosis field. In [5], the authors have used SVM with RBF kernel to diagnosis the heart disease. Leung *et al.* [6], have developed a datamining framework to diagnosis the Hepatitis B. In [7], the authors have proposed three neural network approaches and applied in hepatitis diseases. A. Kharrat *et al.* [8], proposed a novel variant of Support vector machine called Evolutionary SVM for medical diagnostic.

In this paper, the first work is to analysis and to evaluate the performance of different variant of Support Vector Machines and k-Nearest Neighbor algorithm with different distances, in the context of the diagnosis of acute inflammation in urinary system (infected or non-infected with inflammation of urinary bladder or nephritis of renal pelvis origin). The second work is to reach a high classification accuracy rate.

The evaluations of performance have been conducted in term of: classification accuracy rate, classification time, sensitivity, specificity, positive and negative predictive values.

The paper is organized as follows: First we recall some definition of Support Vector Machines and the different approaches using in this study. In Sec. IV, we present the k-Nearest Neighbor and the different distance. In Sec. V, we analyze the result of the different methods and finally we conclude with some perspectives.

## II. SUPPORT VECTOR MACHINES

Support Vector Machine was introduced by Vladimir N. Vapnik in 1995 [9], [10] and it becomes rather popular since. SVM performs classification by constructing a hyperplane that optimally separates the data into two categories (in the case of binary classification). The models of SVM are closely related to Neural Networks.

SVM works well in practice and has been used across a wide range of applications from recognized hand-written digits, face identification, bioinformatics, etc.

The goal of SVM is to find the optimal hyperplane that separates clusters of vector in such a way that cases with one category of the target variable are on one side of the plane and cases with the other category are on the other side of the plane [11]. The vectors near the hyperplane are the support vectors.

Find the optimal hyperplane is equivalent to reformulate the classification problem to an optimization problem [12].

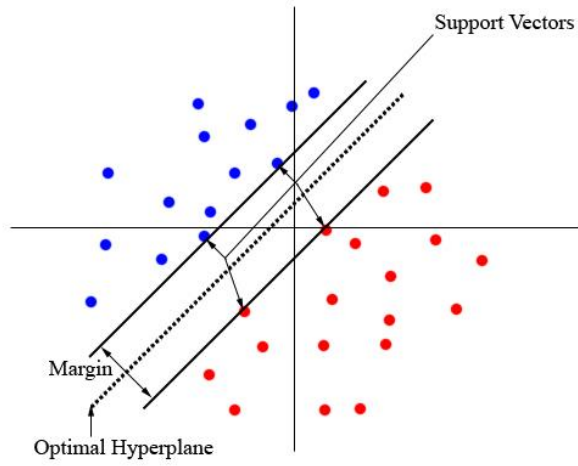


Fig. 1. The optimal Hyperplane.

#### A. Mathematical formulation

Consider a binary classification problem with  $N$  training points  $\{x_i, y_i\}, i=1, \dots, N$ , where each input  $x_i$  has  $D$  attributes and is one of two classes  $y_i \in \{-1, 1\}$ . The data training have the following form:

$$\{x_i, y_i\} \text{ where } i=1, \dots, N, y_i \in \{-1, 1\}, x_i \in R^D \quad (1)$$

The hyperplane can be described by:

$$\langle w, x_i \rangle + b = 0 \quad (2)$$

where  $w$  is the norm to the hyperplane and  $\frac{b}{\|w\|}$  is the perpendicular distance from the hyperplane to the origin.

Finding the optimal hyperplane is equivalent to solving the following optimization problem:

$$\begin{cases} \min \frac{1}{2} w^t w \\ y_i (\langle w, x_i \rangle + b) \geq 1, i = 1, \dots, N \end{cases} \quad (3)$$

It's a primary form of quadratic problem. In order to cater for the constraints in this minimization, we need to allocate them Lagrange multipliers  $\alpha$  and finally we have the dually form:

$$\begin{cases} \max \sum_{i=1}^N \alpha_i - \frac{1}{2} \sum_{i,j} \alpha_i \alpha_j y_i y_j \langle x_i, x_j \rangle \\ \alpha_i \geq 0 \\ \sum_{i=1}^N \alpha_i y_i = 0 \end{cases} \quad (4)$$

By solving the equation (4), we determine the Lagrange multipliers  $\alpha$  and the optimal hyperplan is given by:

$$w^* = \sum_{i=1}^N \alpha_i y_i x_i \quad (5)$$

$$b^* = -\frac{1}{2} \langle w^*, x_{r+x_s} \rangle$$

$$f(x) = \text{sign}(\langle w^*, x \rangle + b^*) \quad (6)$$

Where  $x_r$  and  $x_s$  are any support vectors from each class satisfying:

$$\alpha_r, \alpha_s > 0, y_r = -1, y_s = 1 \quad (7)$$

Solving the optimization problem requires the use of optimization quadratic algorithms such as: SMO, Trust Region, Interior Point, Active-Set, etc.

### III. DIFFERENT VARIANT OF SVM

#### A. SVM by Sequential Minimal Optimization (SVM-SMO)

Invented by Jhon Platt [13], [14], [15] in 1998 at Microsoft research, Sequential Minimal Optimization (SMO) has been widely used for training Support Vector Machines and has been an algorithm for efficiently solving the optimization problem which arises during the training data of SVM.

To solve the quadratic problem of SVM, SMO find the solution by decomposing the quadratic problem into sub-problems and solving the smallest possible optimization problem involving two Lagrange multipliers at each step.

The advantage of SMO lies in the fact that solving two Lagrange multipliers can be done analytically. Thus, numerical QP optimization is avoided entirely.

There are two components to SMO: an analytic method for solving for the two Lagrange multipliers, and a heuristic for choosing which multipliers to optimize.

In order to solve for the two Lagrange multipliers, SMO first computes the constraints on these multipliers and then solves for the constrained minimum:

The bounds  $L$  and  $H$  are given by the following:

$$\triangleright \text{ If } y_i \neq y_j, L = \max(0, \alpha_j^{old} - \alpha_i^{old})$$

$$H = \min(C, C + \alpha_j^{old} - \alpha_i^{old}) \quad (8)$$

$$\triangleright \text{ If } y_i = y_j, L = \max(0, \alpha_j^{old} + \alpha_i^{old} - C)$$

$$H = \min(C, \alpha_j^{old} + \alpha_i^{old}) \quad (9)$$

For a current solution  $(\alpha_i^{old}, \alpha_j^{old})$ , the new solution  $(\alpha_i^{new}, \alpha_j^{new})$  is obtained by using the following update rule:

$$\alpha_j^{new} = \alpha_j^{old} - \frac{y_j(E_i - E_j)}{\eta} \quad (10)$$

Where

$$\begin{aligned} E_k &= f(x_k) - y_k \\ \eta &= 2\langle x_i, x_j \rangle - \langle x_i, x_i \rangle - \langle x_j, x_j \rangle \end{aligned} \quad (11)$$

$E_k$  is the error between the SVM output on the  $k^{th}$  example and the true label  $y_k$ .

Next we clip  $\alpha_j^{new}$  to lie within the range  $[L, H]$  i.e  $L \leq \alpha_j^{new} \leq H$ , to satisfy the constraint that  $0 \leq \alpha_j \leq C$ :

$$\alpha_j^{new} = \begin{cases} H & \text{if } \alpha_j^{new} \geq H \\ L & \text{if } \alpha_j^{new} \leq L \\ \alpha_j^{new} & \text{if } L < \alpha_j^{new} < H \end{cases} \quad (12)$$

Finally, having solved for  $\alpha_j^{new}$ , the value of  $\alpha_i^{new}$  is given by:

$$\alpha_i^{new} = \alpha_i^{old} + y_i y_j (\alpha_i^{old} - \alpha_j^{old}) \quad (13)$$

The choice of Lagrange multiplier  $\alpha_i$  must violate the Karush-Kuhn-Tucker (KKT) conditions for the optimization problem and we pick a second multiplier  $\alpha_j$  and optimize the pair  $(\alpha_i, \alpha_j)$ .

When all the Lagrange multipliers satisfy the KKT conditions (within a user-defined tolerance), the problem has been solved.

Although this algorithm is guaranteed to converge, heuristics are used to choose the pair of multipliers so as to accelerate the rate of convergence.

#### B. Least Square SVM (LS-SVM)

Proposed by Suykens and Vandewalle [16], [17], [18], Least Squares Support Vector Machines (LS-SVM) are reformulations to the standard SVMs which lead to solving linear KKT systems. LS-SVM is closely related to regularization networks and Gaussian processes but additionally emphasizes and exploits primal-dual interpretations. In LS-SVM the minimization problem is reformulating as follows:

$$\begin{cases} \min \frac{\mu}{2} w^T w + \frac{\zeta}{2} \sum_{i=1}^N e_{i,c}^2 \\ y_i (\langle w, x_i \rangle + b) = 1 - e_{i,c}, i = 1, \dots, N \end{cases} \quad (14)$$

The reformulation corresponds to a regression interpretation with binary targets  $y_i = \pm 1$ . Using  $y_i^2 = 1$  we have:

$$\begin{aligned} \sum_{i=1}^N e_{i,c}^2 &= \sum_{i=1}^N (y_i e_{i,c})^2 = \sum_{i=1}^N e_i^2 \\ &= \sum_{i=1}^N \left\{ y_i - [\langle w, x_i \rangle + b] \right\}^2 \end{aligned}$$

The Lagrangian for this problem is:

$$\begin{aligned} L(w, b, e; \alpha) &= \frac{\mu}{2} w^T w + \frac{\zeta}{2} \sum_{i=1}^N e_i^2 \\ &\quad - \sum_{i=1}^N \alpha_i \{ y_i (\langle w, x_i \rangle + b) - 1 + e_i \} \end{aligned}$$

The KKT optimality conditions are given by:

$$\begin{aligned} \frac{\partial L}{\partial w} &= 0 \rightarrow w = \sum_{i=1}^N \alpha_i y_i x_i, i = 1, \dots, N \\ \frac{\partial L}{\partial b} &= 0 \rightarrow \sum_{i=1}^N \alpha_i y_i = 0, i = 1, \dots, N \\ \frac{\partial L}{\partial e_i} &= 0 \rightarrow \alpha_i = \gamma e_i, \gamma = \frac{\mu}{\zeta}, i = 1, \dots, N \\ \frac{\partial L}{\partial \alpha_i} &= 0 \rightarrow y_i (\langle w, x_i \rangle + b) - 1 + e_i = 0, i = 1, \dots, N \end{aligned}$$

After elimination of  $w$  and  $e_i$ , the solution of the optimization problem can be obtained by solving the following set of linear equations:

$$\begin{bmatrix} 0 & 1_N^T \\ 1_N & \Omega + \gamma^{-1} I_N \end{bmatrix} \begin{bmatrix} b \\ \alpha \end{bmatrix} = \begin{bmatrix} 0 \\ Y \end{bmatrix}$$

where:  $Y = [y_1, \dots, y_N]^T$ ,  $I_N = [1, \dots, 1]^T$ ,  $\alpha = [\alpha_1, \dots, \alpha_N]$ ,  $I_N =$  Identity matrix,  $\Omega =$  kernel function.

Finally, the classifier is found by solving a set of linear equations instead of a convex quadratic programming (QP) problem for classical SVMs. Both  $\mu$  and  $\zeta$  should be considered as hyper-parameters to tune the amount of regularization versus the sum squared error [19].

#### IV. K-NEAREST NEIGHBOR

K-Nearest Neighbor (k-NN) is one of popular and simplest algorithm and it works incredibly well in practice [20], [21], [22]. K-NN is non parametric algorithm (it means that it does not make any assumptions on the underlying data distribution) and it does not use the training data points to do any generalization (no explicit training phase).

K-Nearest Neighbor uses the theory of the distance to classify a new element. It calculates the distance between the new element and the others which their classes are known. The class that appears most among the neighbors is assigned to the new element.

The choices of some parameters are very important in k-NN algorithm, these parameters are: the distance function and the parameter  $k$  which represents the number of neighbors chosen to assign the class to the new element.

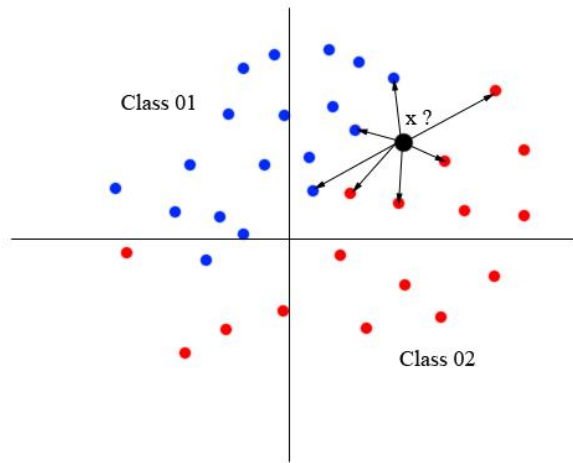


Fig. 2. The K-Nearest Neighbor.

#### A. The k-nn algorithm

The basic schema of k-NN algorithm:

1. Choose a value of parameter  $k$  and the distance function.
2. Given a  $N$  elements and their classes (the class of element  $x$  is  $c(x)$ ).
3. For each new element  $y$ .
4. Calculate the distance between  $y$  and the others elements.
5. Determine the  $k$ -nearest neighbors of  $y$ .
6. The new element  $y$  will be assigned to the majority class among the  $k$ -nearest neighbor.
7. The class of  $y$  is  $c(y)$ .

#### B. The distances

A distance is an application which represents the length between two points. It must satisfy the following axioms:

- Non-negativity,
- Symmetry,
- Reflexivity,
- Triangle Inequality.

In the table 1, we define some distances which are very used in the literature: ( $x_i, x_j$  : two points -  $x_i, x_j$  : two vectors -  $c_{xi,xj}$  : The coefficient of Pearson correlation).

Table 1. List of some distance used in the literature.

Distances	Formulation
Euclidean	$d(x_i, x_j) = \sqrt{\sum_{r=1}^n (x_{ir} - x_{jr})^2}$
Cityblock (Manhattan)	$d(x_i, x_j) = \sum_{r=1}^n  x_{ir} - x_{jr} $
Cosine	$d(x_i, x_j) = \frac{\sum_{r=1}^n x_{ir} \times x_{jr}}{\sqrt{\sum_{r=1}^n (x_{ir})^2} \times \sqrt{\sum_{r=1}^n (x_{jr})^2}}$
Correlation	$d(x_i, x_j) = 1 - c_{xi,xj}$

### V. EXPERIMENTATION

In this study, we analyze and evaluate the performance of different approaches of Support Vector Machines and K-nearest neighbor with several distances in the context of medical diagnosis. The evaluation has been conducted in term of: classification accuracy rate, classification time, sensitivity, specificity, positive and negative predictive values. These performance metrics are calculated by using the following equations:

$$\begin{aligned}
 \text{Classification accuracy : } & \frac{NTP + NTN}{NTP + NTN + NFP + NFN} \\
 \text{Sensitivity : } & \frac{NTP}{NTP + NFN} \\
 \text{Specificity : } & \frac{NTN}{NTN + NFP} \\
 \text{Positive Predictive Value : } & \frac{NTP}{NTP + NFP} \\
 \text{Negative Predictive Value : } & \frac{NTN}{NTN + NFN}
 \end{aligned}$$

where :

$NTP$  : Number of True Positives  
 $NTN$  : Number of True Negatives  
 $NFP$  : Number of False Positives  
 $NFN$  : Number of False Negatives

The dataset contains informations about two diseases of urinary system which is the acute inflammation and the acute nephritis. The data was created by a medical expert as a data set to test the expert system, which will perform the presumptive diagnosis of two diseases of urinary system. The data is obtained from UCI Machine Learning Repository.

The acute inflammation of urinary bladder can be due to infection from bacteria that ascend the urethra to the bladder or for unknown reasons. This disease is characterized by: throbbing pain in the region of the bladder, occurrence of pains in the abdomen region, frequent need to urinate accompanied by a burning sensation and blood may be observed in the urine and the patient may suffer cramps after urination. If the person who suffers from this disease and does not be treated, we should expect that the illness will turn into protracted form.

The second disease is the acute nephritis of renal pelvis origin occurs considerably more often at women than at men. The first symptom of this disease is a sudden fever which exceeds sometimes 40C. The fever is accompanied by shivers and one or both-side lumbar pains which are sometimes very strong. Symptoms of acute inflammation of urinary bladder appear very often. Quite not infrequently there are nausea and vomiting and spread pains of whole abdomen.

The dataset consists of 120 instances (each instance represents a potential patient) with no missing values. It contains 9 attributes which are integer and categorical. The following table 2 describes the attributes of this database.

For each learning methods we must effectuate two essential steps: training and testing steps. In this work we have used the holdout method (which is the simplest kind of cross validation) to separate randomly the data base in two parts. Note that the k-nearest neighbor not needs a training phase.



Table 2. Attribute information of acute inflammations data set.

Attribute Description	Values of Attribute
Temperature of patient (C)	{35-42}
Occurrence of nausea	{yes,no}
Lumber pain	{yes,no}
Urine pushing	{yes,no}
Micturition pains	{yes,no}
Burning of urethra	{yes,no}
Decision : Inflammation of urinary bladder	{yes,no}
Decision : Nephritis of renal pelvis origin	{yes,no}

To validate our experimentation and the three algorithms of SVM (SVM-QP, SVM-SMO and SVM-LS), we have used several tests with different training and testing sets generated randomly by the holdout method (we made 50 tests).

The performance of k-nearest neighbor algorithm have been studies with four distances (Euclidean, Cityblock, Cosine and Correlation distance) and by using different values of "k" (between 1 and 50).

In the Fig.3, we show the classification accuracy rate obtained by (SVM-QP, SVM-SMO, SVM-LS, KNN-Euclidean Distance, KNN-Cityblock Distance, KNN-Cosine Distance and KNN-Correlation Distance).

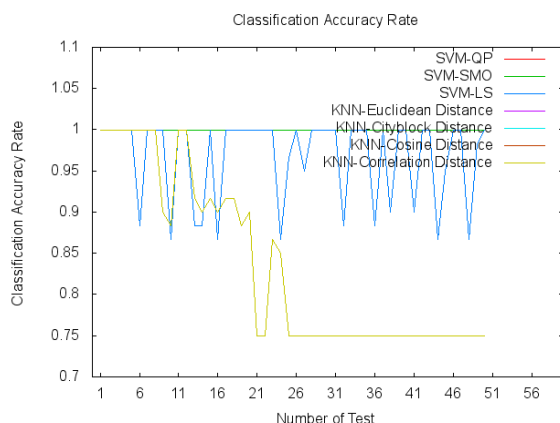


Fig. 3. The figure shows the classification accuracy rate obtained by the different approaches for all the test.

We clearly observe that the different approaches of SVM have reached a 100% classification accuracy rate. Also, for the k-NN with the four distances we record a 100% classification accuracy rate when k is between 1 and 10. When k is greater than 10 we remark a slight decrease of classification rate.

In all the various tests and by using different training and testing set in each test, SVM-QP and SVM-SMO we have obtained a 100% classification accuracy rate.

In Fig.4, we illustrate the classification time in each test and for all the different approaches.

The minimum classification time is recorded for the (SVM-QP, SVM-SMO and SVM-LS) with an advantage for SVM-QP. k-NN has the maximum classification time and this because k-NN algorithm calculates the distances between the new sample and all the sample of data set.

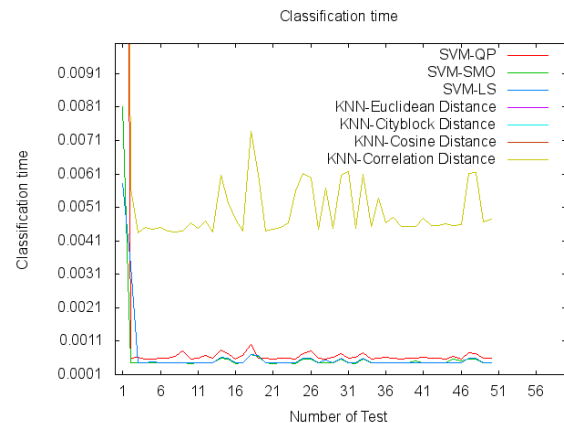


Fig. 4. The figure shows the classification time for each approaches in each tests.

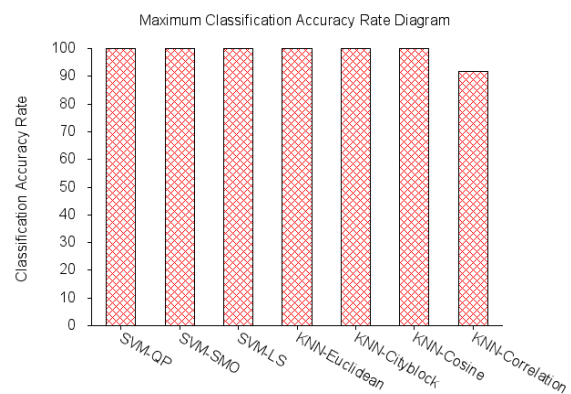


Fig. 5. The maximum classification accuracy rate between all the 50tests.

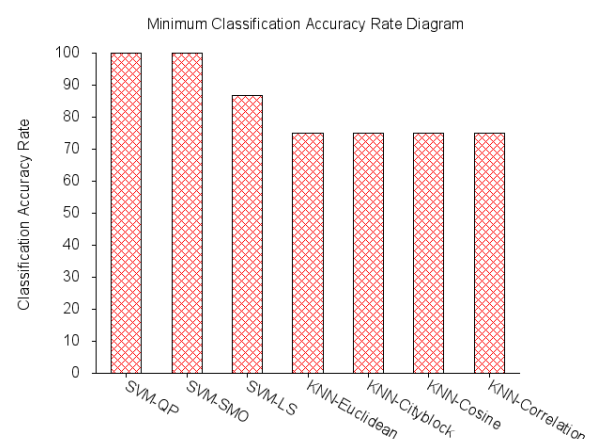


Fig. 6. The minimum classification accuracy rate between all the 50 tests.

Finally we present a summary of all results obtained followed by the sensitivity, specificity, positive and negative predictive values correspond to the maximum classification accuracy rate between the 50 tests.

## VI. CONCLUSION

In this study, we aim to reach a high accuracy classification rate and to evaluate different approaches of

Support Vector Machines and K-nearest neighbor with different distances in acute inflammation of urinary system diagnosis. SVM-QP and SVM-SMO have achieved significant results in dealing with 100% of classification accuracy rate and a good performance in term of classification time. This experimentation showed that the proposed diagnosis SVMs could be useful for identifying the infected person.

Table 3. Sensitivity (Sens %) and specificity (Spec %), positive predictive value (Pos.P.V %) and negative predictive value (Neg.P.V %) calculated for the approaches SVMs and K-NN.

Method	Sens.	Spec.	Pos.P.V	Neg.P.V
SVM-QP	100	100	100	100
SVM-SMO	100	100	100	100
SVM-LS	100	100	100	100
KNN-Euclidean	100	100	100	100
KNN-Cityblock	100	100	100	100
KNN-Cosine	100	100	100	100
KNN-Correlation	93,33	91,11	77,78	97,61

Table 4. Summary of all Results Obtained by Svms and Knn. Average Classification Accuracy (A.C.A.R %), Average Classification Time (A.C.T %), Maximum Classification Accuracy Rate (Max. %) and Minimum Classification Accuracy Rate (Min. %).

Method	A.C.A.R	A.C.T	Max.	Min.
SVM-QP	100	0,0018	100	100
SVM-SMO	100	0,0006	100	100
SVM-LS	96,80	0,0006	100	86,67
KNN-Euclidean	83,50	0,0059	100	75,00
KNN-Cityblock	84,03	0,0050	100	75,00
KNN-Cosine	89,59	0,0043	100	75,00
KNN-Correlation	84,40	0,0040	91,67	75,00

## REFERENCES

- [1] S. Shah and A. Kusiak, "Cancer gene search with data-mining and genetic algorithms," *Computers in Biology and Medicine*, vol. 37, 2002.
- [2] J. Czerniak and H. Zarzycki, "Application of rough sets in the presumptive diagnosis of urinary system diseases," *Artificial Intelligence and Security in Computing Systems, ACS'2002 9th International Conference Proceedings*, Kluwer Academic Publishers, 2003, pp. 41-51.
- [3] Q. K. Al-Shayea, "Artificial neural networks in medical diagnosis," *IJCSI International Journal of Computer Science*, vol. 8, no. 2, Mar 2011.
- [4] Q. K. Al-Shayea and I. S. H. Bahia, "Urinary system diseases diagnosis using artificial neural networks," *IJCSNS International Journal of Computer Science and Network Security*, vol. 10, no. 7, Jul 2010.
- [5] S. Ghumbre, C. Patil and A. Ghatol, "Heart Disease Diagnosis using Support Vector Machine," *International Conference on Computer Science and Information Technology (ICCSIT'2011)*, Pattaya, pp. 84-88, 2011.
- [6] K. Leung, Y. Ng, K. Lee, L. Chan, K. Tsui, T. Mok, C. Tse and J. Sung, "Data Mining on DNA Sequences of Hepatitis B Virus by Nonlinear Integrals," *Proceedings Taiwan-Japan Symposium on Fuzzy Systems & Innovational Computing, 3rd meeting*, Japan, pp.1-10, 2006.
- [7] L. Ozyilmaz, T. Yildirim, "Artificial neural networks for diagnosis of hepatitis disease," *Proceedings of the International Joint Conference on Neural Networks*, Vol. 1, pp. 586 – 589, 2003.
- [8] A. Kharrat and N. Benamrane, "Evolutionary Support Vector Machine for Parameters Optimization Applied to Medical Diagnostic," *VISAPP 2011 - International Conference on Computer Vision Theory and Applications*, Algeria, Oran, 2011.
- [9] C. Cortes and V. Vapnik, "Support-vector networks," *Machine Learning*, vol. 20, no. 3, 1995.
- [10] M. Rychetsky, Algorithms and architectures for machine learning based on regularized neural networks and support vector approaches. *Shaker Verlag GmbH, Germany*, 2001.
- [11] J. Shawe-Taylor and N. Cristianini, Kernel Methods for Pattern Analysis. *Cambridge University Press*, 2004.
- [12] M.Govindarajan,"A Hybrid RBF-SVM Ensemble Approach for Data Mining Applications", *International Journal of Intelligent Systems and Applications (IJISA)*, vol.6, no.3, pp.84-95, 2014. DOI: 10.5815/ijisa.2014.03.09.
- [13] J. C. Platt, "Improvements to platt's smo algorithm for svm classifier design," *Neural Computation*, vol. 13, no. 3, 2001.
- [14] J. C. Platt, B. Scholkopf, C. Burges, and A. Smola, "Fast training of support vector machines using sequential minimal optimization," *Advances in Kernel Methods - Support Vector Learning*, 1999.
- [15] G. W. Flake and S. Lawrence, "Efficient svm regression training with smo," *Journal Machine Learning*, vol. 46, no. 3, 2002.
- [16] J. A. K. Suykens, T. V. Gestel, J. D. Brabanter, B. D. Moor, and J. Vandewalle, "Least squares support vector machines," *World Scientific Pub. Co., Singapore*, 2002.
- [17] J. A. K. Suykens and J. Vandewalle, "Least squares support vector machine classifiers," *Neural Processing Letters*, vol. 9, 1999.
- [18] J. Ye and T. Xiong, "Svm versus least squares svm," *Journal of Machine Learning Research*, vol. 2, Oct 2007.
- [19] L. Jiao, L. Bo, and L. Wang, "Fast sparse approximation for least squares support vector machine," *IEEE Transactions on Neural Transactions*, vol. 19, no. 3, May 2007.
- [20] J. S. Snchez, R. A. Mollineda, and J. M. Sotoca, "An analysis of how training data complexity affects the nearest neighbor classifiers," *Pattern Analysis and Applications*, vol. 10, no. 3, 2007.
- [21] M. Raniszewski, "Sequential reduction algorithm for nearest neighbor rule," *Computer Vision and Graphics*, vol. 6375, 2010.
- [22] D. Coomans and D. Massart, "Alternative k-nearest neighbor rule in supervised pattern recognition," *Analytica Chimica Acta*, vol. 136, 1982.

## Authors' Profiles



**Seyyid Ahmed Medjahed** graduated with M.Sc., of Engineering of Data and Knowledge at Oran University, Algeria. He is a PhD student at University of Sciences and Technology Mohamed Boudief USTO-MB, of Mathematics and Computer Science, Oran, Algeria. He started teaching as Assistant Professor in 2012 at Relizane University Center, Algeria. His area of

research interests includes: Machine Learning and Image Processing.



**Tamazouzt Ait Saadi** teacher and researcher at Mostaganem University, Algeria since September 2003. She obtained her certificate of engineer in computer science in 1989. In 2003, she had her M.Sc. and continues his doctoral at Havre University, France.



**Abdelkader Benyettou** received his BSc of engineering in 1982 from the Institute of Telecommunications of Oran, and the MSc degree in 1986 from the University of Sciences and Technology of Oran, Algeria. In 1987, he joined the Computer

Sciences Research Center of Nancy, France, where he worked

until 1991 on Arabic speech recognition by expert systems and received his PhD in electrical engineering in 1993 from the University of Sciences and Technology of Oran. Since 2003, he has been a professor at the University of Sciences and Technology of Oran. His interests are in the area of speech and image processing, Arabic speech recognition, neural networks, and machine learning. He has been the director of the Signal-Speech-Image— SIMPA Laboratory, Department of Computer Sciences, Faculty of Sciences, University of Sciences and Technology of Oran, since 2002.