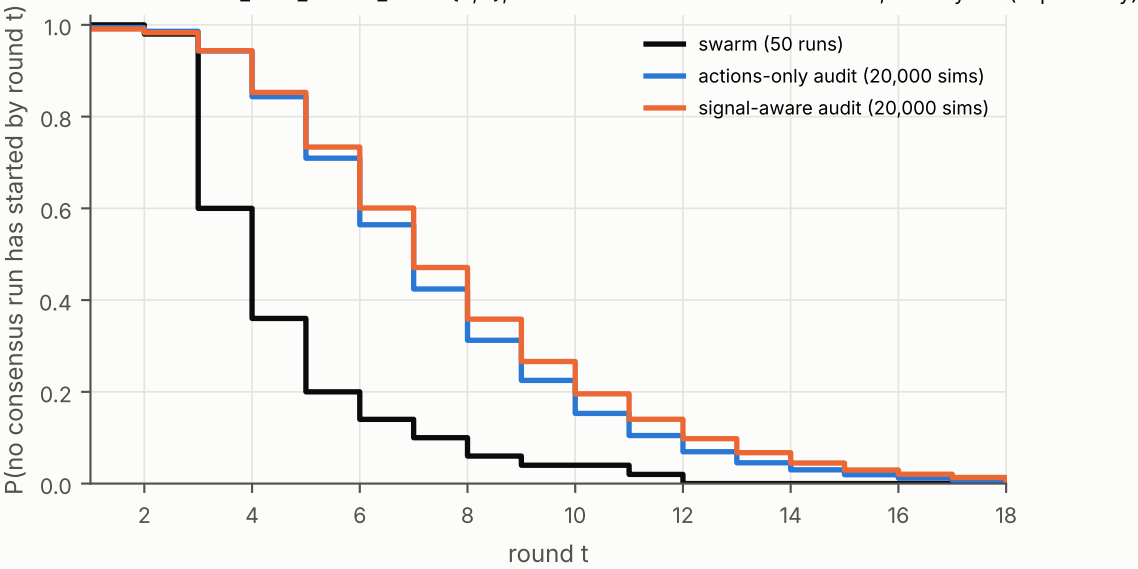
OLMo-3-7B, cheap talk, n = 10 cycle: time to consensus
consensus = X_t = X_t+1 = X_t+2 in {0, 1}; none: censored at T. Extra-arm runs, reanalysed (exploratory)
swarm (50 runs)
actions-only audit (20,000 sims)
signal-aware audit (20,000 sims)
P(no consensus run has started by round t)
round t
1.0
0.8
0.6
0.4
0.2
0.0
2
4
6
8
10
12
14
16
18