```
Train Dataloader - 58
Test Dataloader - 182

Device Used - cuda

Model Used - Base_3DCAE
Feature Extraction - True
Background Subtraction - True
Background Subtraction Algorithm - GMG
Data Augmentation - False

Window Length = 8
Stride = 1
Fair Comparison = True
Dropout = 0.25
Learning Rate = 0.0002
Num Epochs = 20
Chunk Size = 64
Forward Chunk = 8
Forward Chunk Size = 8
Loss Fn = L1Loss()

Training has Begun
epoch [1/20], loss:0.0001
epoch [2/20], loss:0.0001
epoch [3/20], loss:0.0001
epoch [4/20], loss:0.0001
epoch [5/20], loss:0.0001
epoch [6/20], loss:0.0001
epoch [7/20], loss:0.0001
epoch [8/20], loss:0.0001
epoch [9/20], loss:0.0001
epoch [10/20], loss:0.0000
epoch [11/20], loss:0.0000
epoch [12/20], loss:0.0000
epoch [13/20], loss:0.0001
epoch [14/20], loss:0.0000
epoch [15/20], loss:0.0000
epoch [16/20], loss:0.0000
epoch [17/20], loss:0.0001
epoch [18/20], loss:0.0000
epoch [19/20], loss:0.0000
c:\Users\abdul\anaconda3\envs\fyp_base_paper_2\lib\site-packages\numpy\lib\npyio.py:528: V
isibleDeprecationWarning: Creating an ndarray from ragged nested sequences (which is a lis
t-or-tuple of lists-or-tuples-or ndarrays with different lengths or shapes) is deprecated.
If you meant to do this, you must specify 'dtype=object' when creating the ndarray.
  arr = np.asanyarray(arr)
```

```
epoch [20/20], loss:0.0000
Training has Completed

Forward pass occuring
Forward pass completed

ONI_IR_T_2024-03-15-04-14-00

----------------------------------
STD Global Classification Results
TPR 0.905, FPR 0.186, Precision 0.044, Recall 0.905
tn 564735, fp 128864, fn 626, tp 5975
std_AUROC  0.900
----------------------------------
----------------------------------
Mean Global Classification Results
TPR 0.894, FPR 0.172, Precision 0.047, Recall 0.894
tn 574056, fp 119543, fn 702, tp 5899
mean_AUROC 0.898
----------------------------------
d:\Abdul Rasheed NITT\Academics\Eigth Semester\FYP\Implementation\FallDetection\Code\funct
ions.py:250: RuntimeWarning: Mean of empty slice
  final_performance_mean = np.nanmean(video_metrics, axis=0)  # get the mean performance a
cross all videos
c:\Users\abdul\anaconda3\envs\fyp_base_paper_2\lib\site-packages\numpy\lib\nanfunctions.p
y:1670: RuntimeWarning: Degrees of freedom <= 0 for slice.
  var = nanvar(a, axis=axis, dtype=dtype, out=out, ddof=ddof,
```

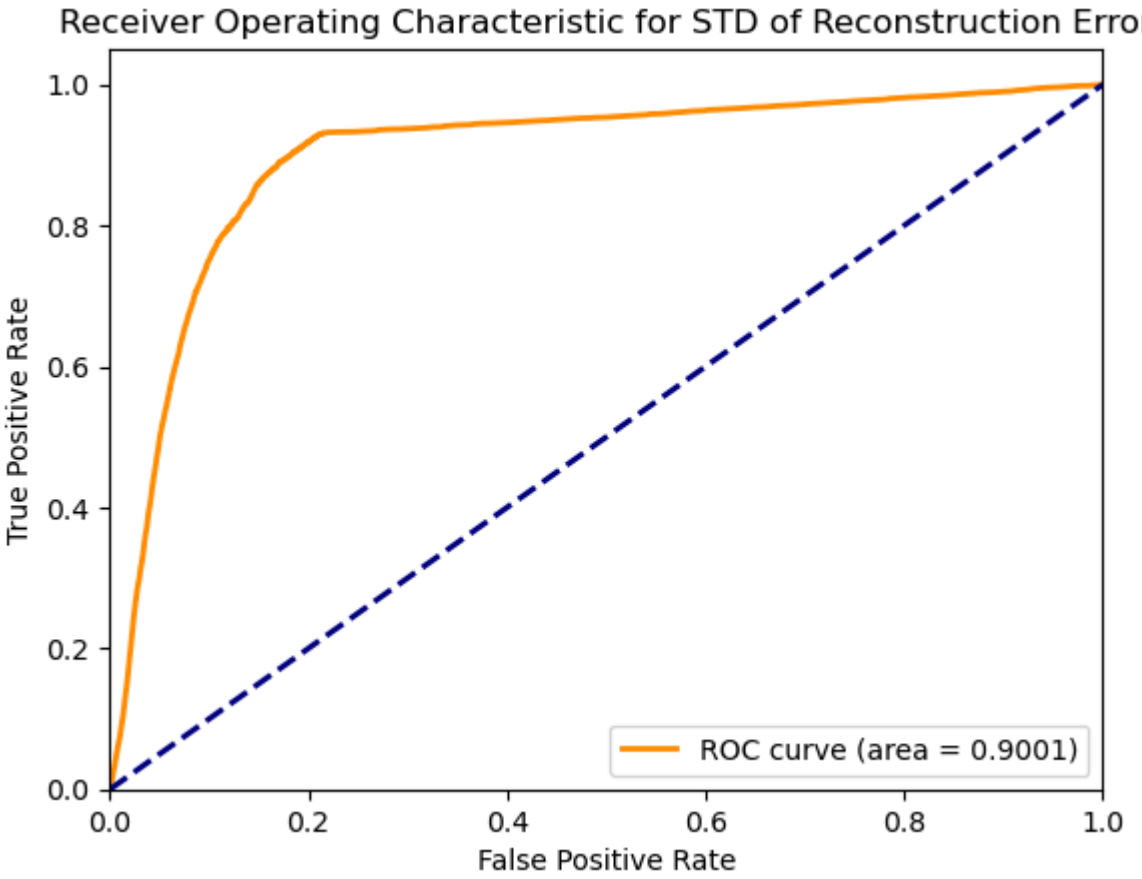

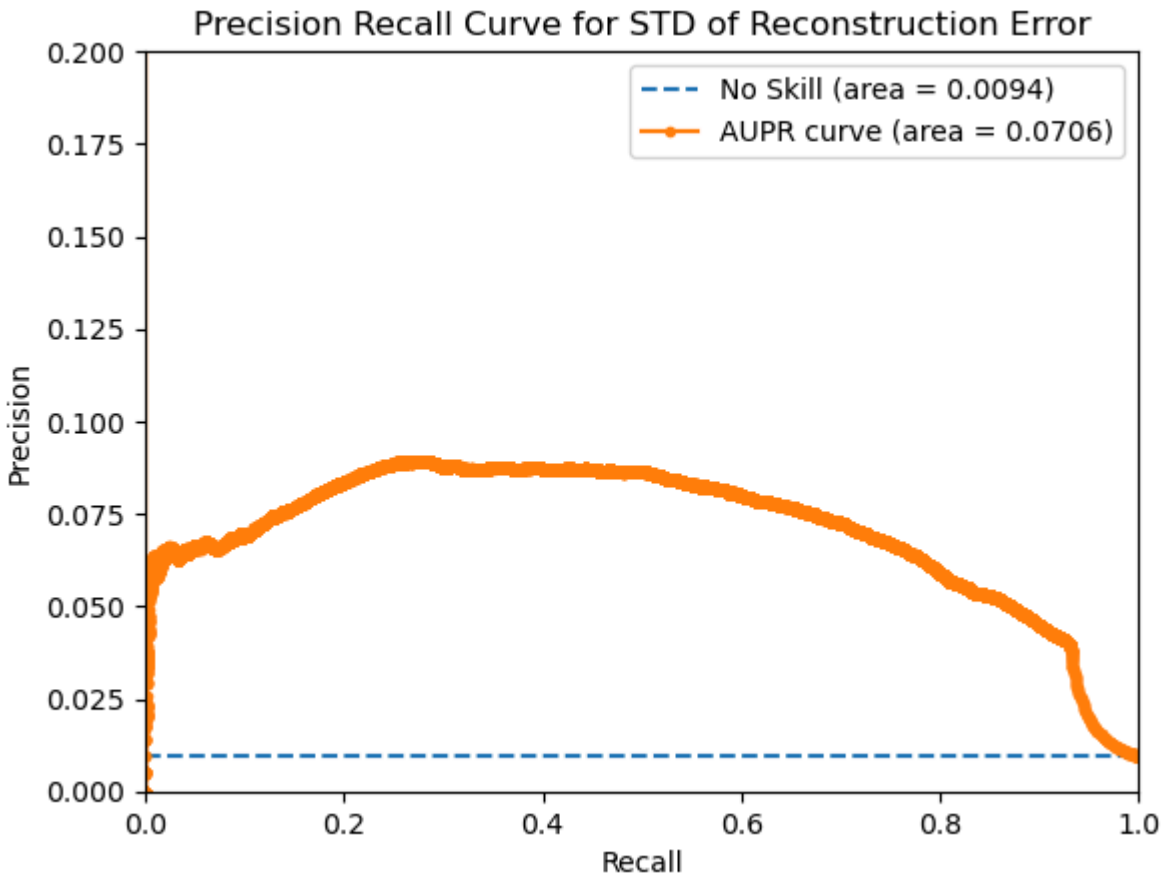
Precision Recall Curve for STD of Reconstruction Error
No Skill (area = 0.0094)
AUPR curve (area = 0.0706)
Precision
Recall
0.200
0.175
0.150
0.125
0.100
0.075
0.050
0.025
0.000
0.0
0.2
0.4
0.6
0.8
1.0

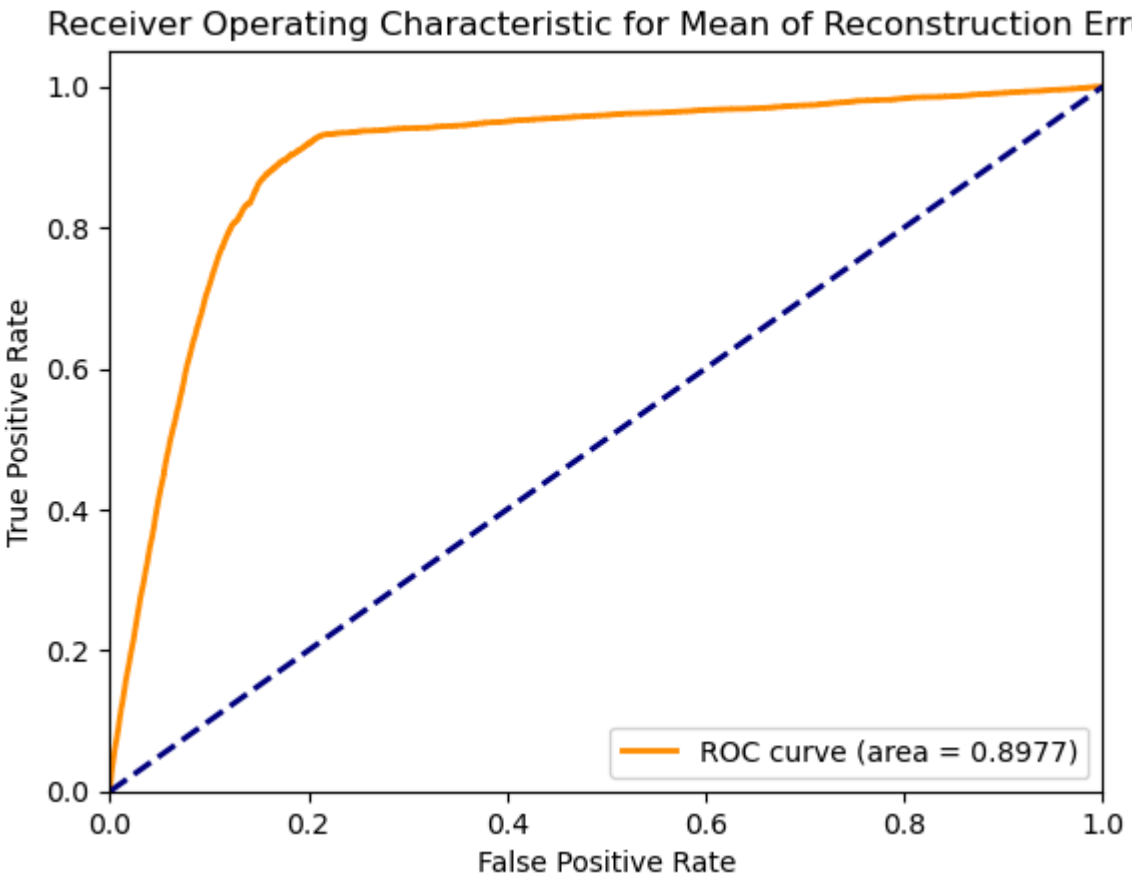
Receiver Operating Characteristic for Mean of Reconstruction Error
ROC curve (area = 0.8977)
True Positive Rate
False Positive Rate
1.0
0.8
0.6
0.4
0.2
0.0
0.0
0.2
0.4
0.6
0.8
1.0

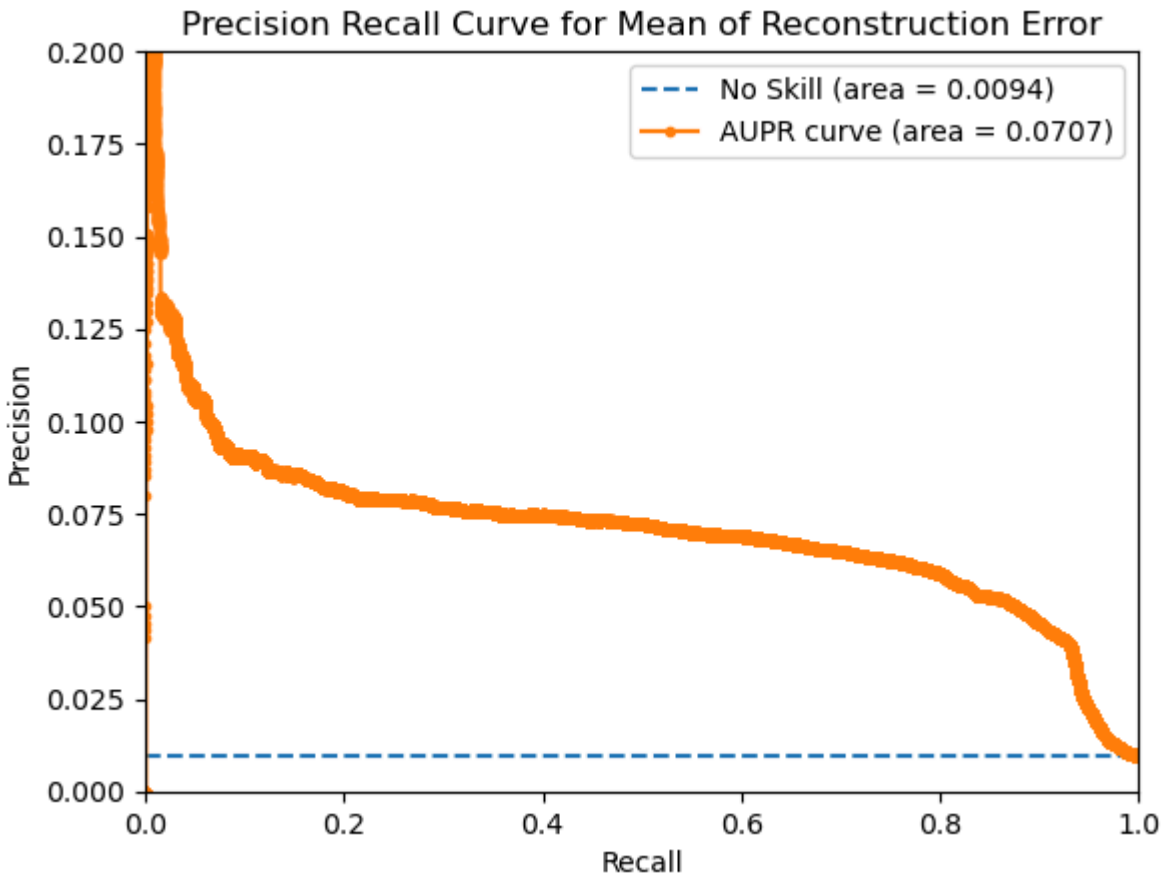
Precision Recall Curve for Mean of Reconstruction Error
No Skill (area = 0.0094)
AUPR curve (area = 0.0707)
Precision
Recall
0.200
0.175
0.150
0.125
0.100
0.075
0.050
0.025
0.000
0.0
0.2
0.4
0.6
0.8
1.0