Simulation of the drift chamber for the FCCee-IDEA detector concept within FCCSW

Niloufar Alipour Tehrani

Common detector technology:

Common software

FCC Week 2018
Amsterdam, the Netherlands

12 April 2018

FCC Software: FCCSW

- Common software for all FCC experiments
  - ee, hh & eh
- Detector and physics studies
  - Fast & full simulations
  - One software stack from event generation to physics analysis
- Collaborative approach
  - LHC: Gaudi
  - CLIC: DD4hep
  - New solutions ⇒ where needed

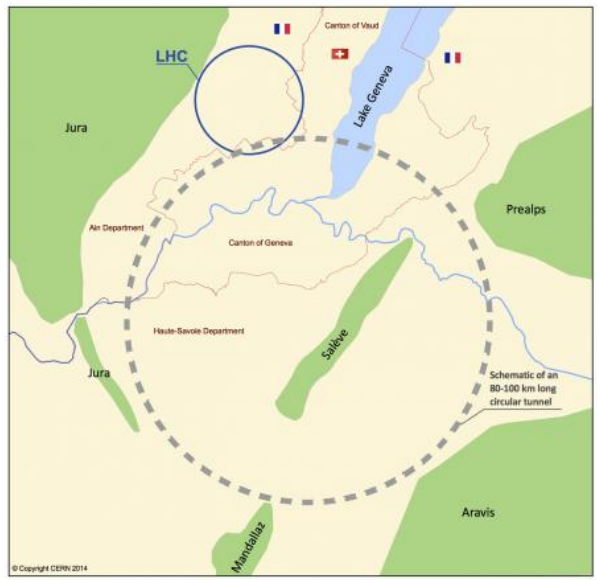

2 FCCee detector concepts

- The CLD detector concept (c.f. CLD detector model overview, Oleksandr Viazlo)
  - An adaptation of the CLIC detector model
    $\Rightarrow$ (Silicon-based vertex and tracking detectors)
  - Widely simulated with the ILCSoft
- The IDEA detector concept $\Rightarrow$ focus of this talk
  - Simulated using FCCSW

IDEA: Ultimate Goal

- Vertex detector: MAPS
- Ultra-light drift chamber with PID
- Pre-shower counter
- Double read-out calorimetry
- 2 T solenoidal magnetic field
- Instrumented return yoke
- Surrounded by large tracking volume (R$\sim$8 m) for very weakly coupled (long-lived) particles

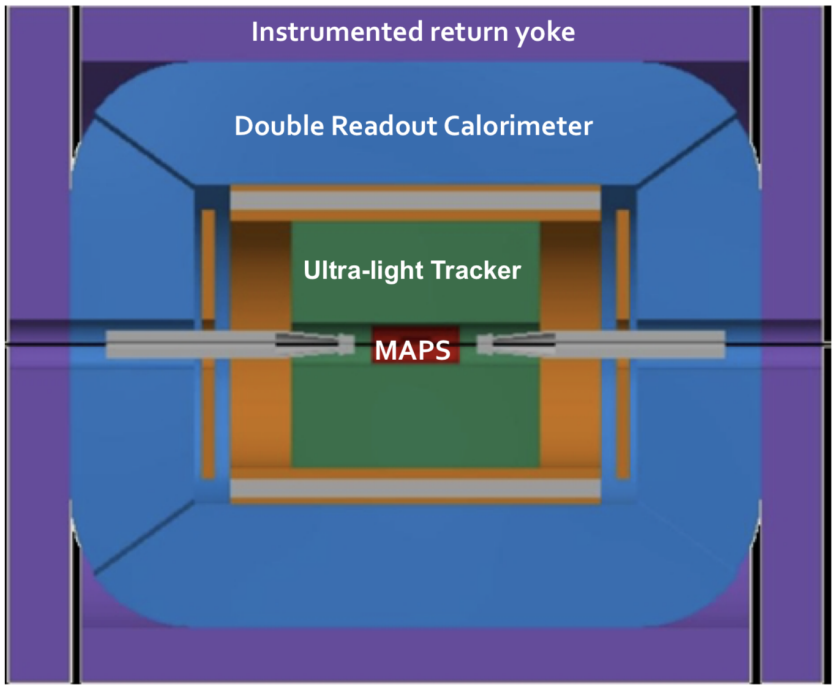

IDEA Drift Chamber (DCH)

- Track reconstruction
- Particle ID
- Layers divided into cells rotated with a certain stereo angle
  - Field wires: provide a uniform electric field
  - Sensitive wires: record signal
  - Field to sense wire ratio: 5:1

Parameters

Length	4500 mm
Inner radius	345 mm
Outer radius	2000 mm
Nb. layers	112
Cell size	12 mm to 14.7 mm
Total nb. of sensitive wires	56448
Total nb. of field wires	282240
Total nb. of wires	338688
Gas	GasHe_90Isob_10
Wire material	Aluminum
Single cell resolution	0.1 mm

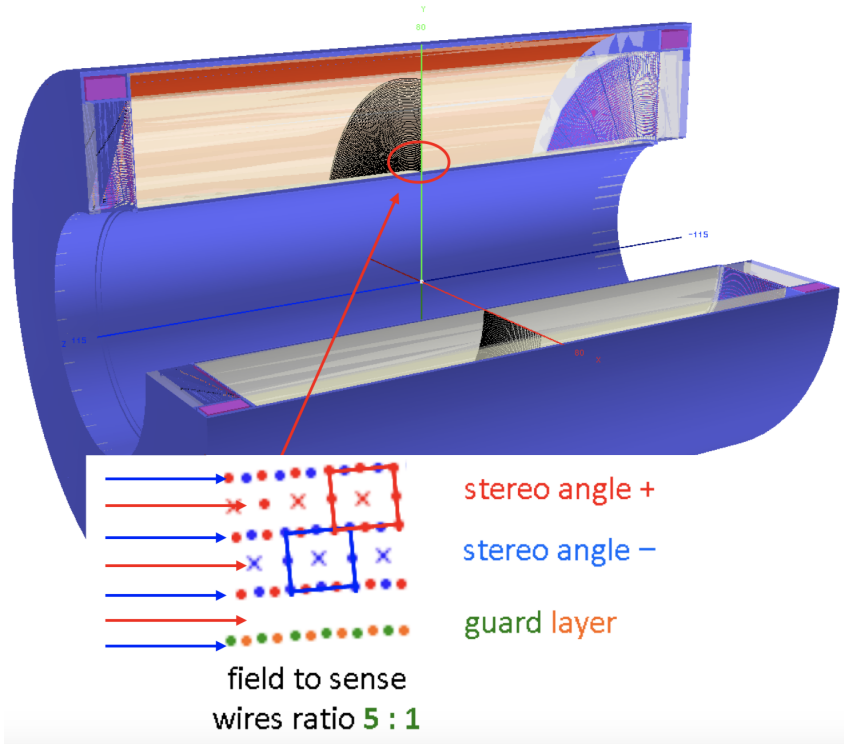

FCCSW simulation chain

1. Detector geometry description with DD4hep
   - Collaborative effort with CLIC, ILC and LHCb
   - The IR region and the VXD from CLD are as well implemented in DD4hep
   - Definition of the gas layers in the DCH
2. Segmentation of the sensitive areas:
   - Information on the position of the sense wires instead of placing physical volumes
   - Speed up the simulation
3. Geant4 simulation:
   - Calculate the E_{dep} for each ionisation action
   - Charge drift to the wires
4. Hit reconstruction:
   - Combination of individual hit calculations from (4)
   - Calculation of the signal in the wire

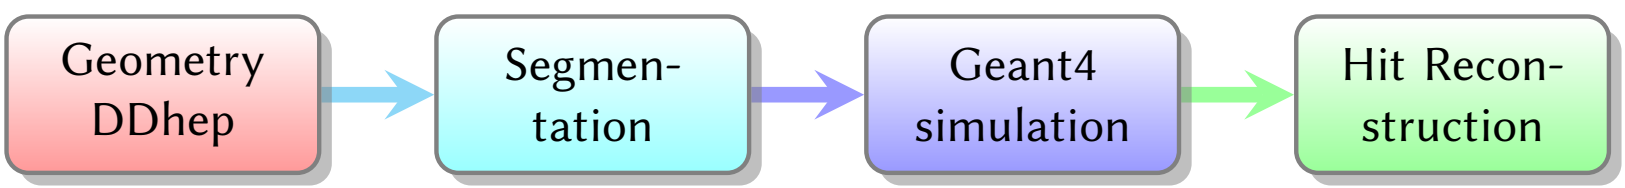

1. Geometry

- Beam-pipe and interaction region (IR) taken from the CLD concept.
- Vertex detector also taken from the CLD concept.
- The drift chamber implemented from scratch in FCCSW.

Visualisation with FCCSW

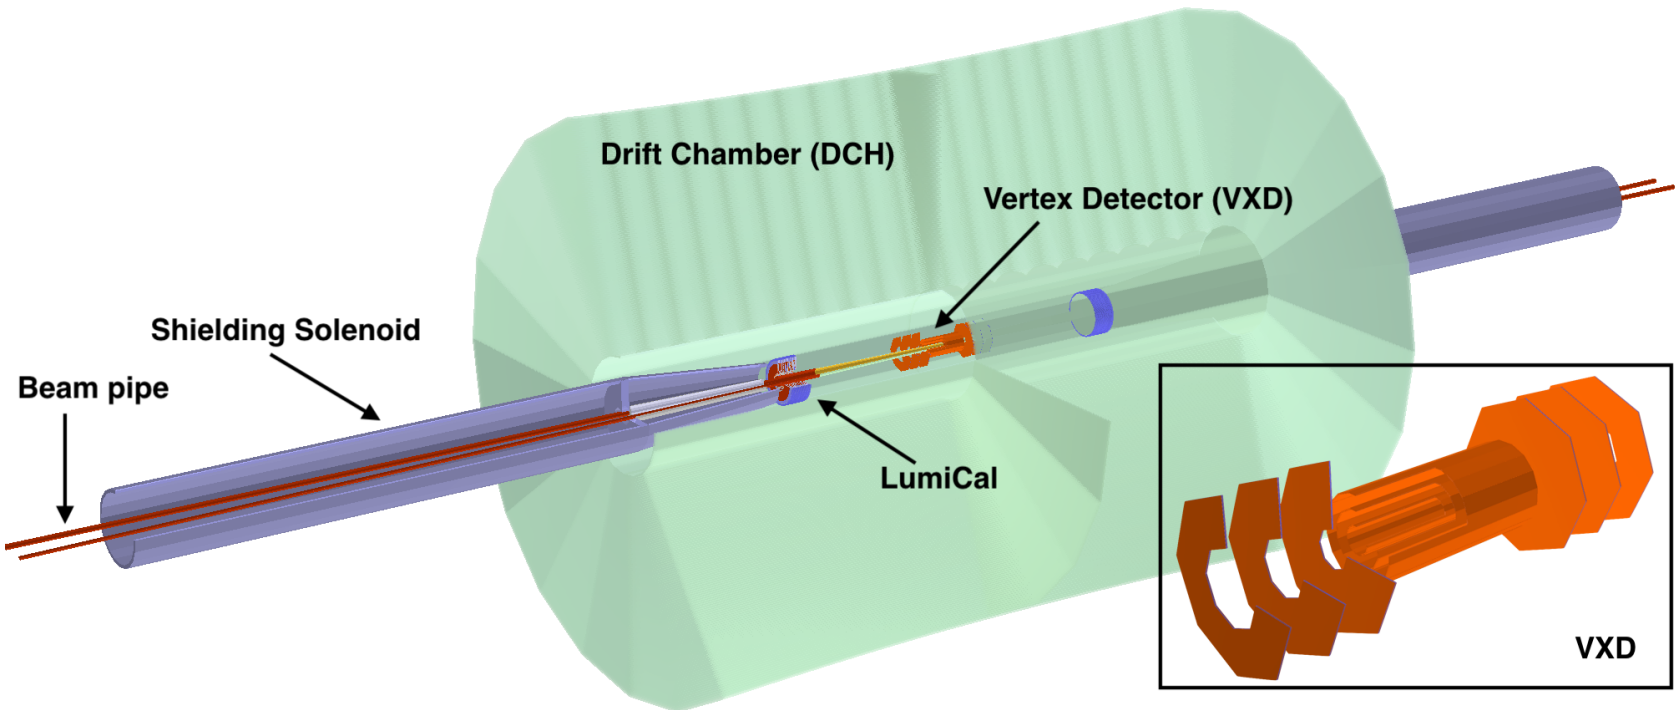

2. Segmentation for DCH

- Information on the location of the wires
- Associates a unique wire ID (cellID) to the wires
- Different granularity for different layers in the DCH
- The segmentation information is created while building geometry

  $\Rightarrow$ Accessible in every step of the simulation

- First layer of the DCH
- Hits having the same wire ID are shown by the same color
- Validates the segmentation

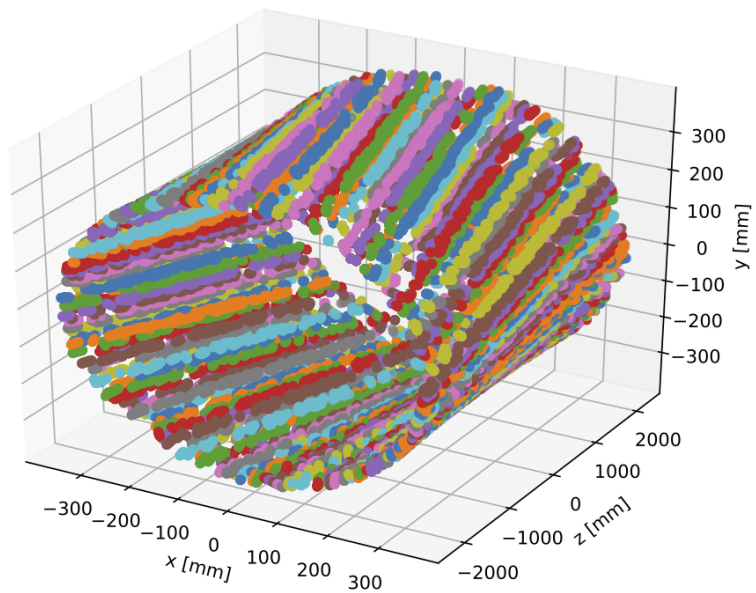

3. Geant4 simulation of the DCH

- Stepping in the gas with a step length of 2 mm
- Reject ionisation acts with:
  - $E_{dep} < 10$ eV
  - G4Step length $< 5\mu$m
- Drift the E_{dep} to the nearest wire
  - Distance of the closest approach
  - Assume a constant drift velocity of 2 cm/μs
  - Calculate drift time
- For each wire, merge the E_{dep} with a drift time smaller than the maximum drift time in the cell

Number of layers vs. θ

- Number of layers hit by 100 GeV $\mu-$
  - $\theta = 0°$: very forward direction
  - $\theta = 90°$: in the barrel
  - Averaged over ϕ

VXD

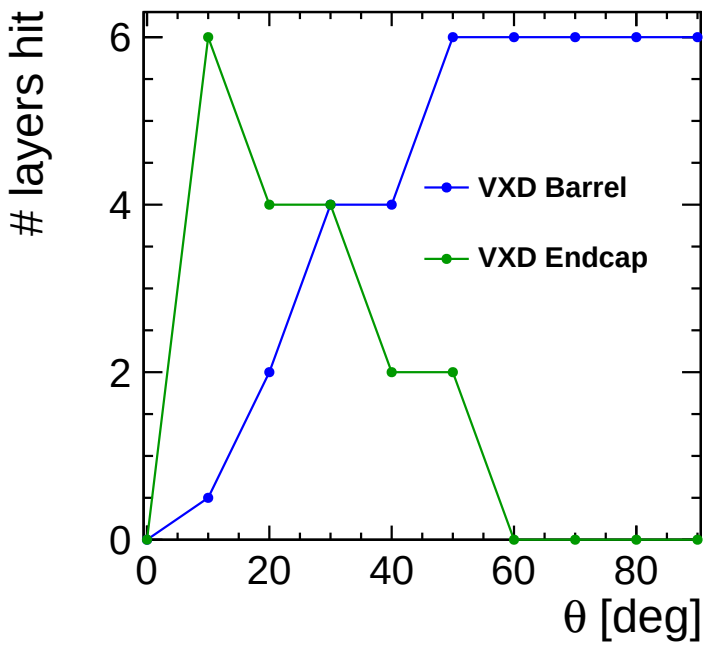

DCH

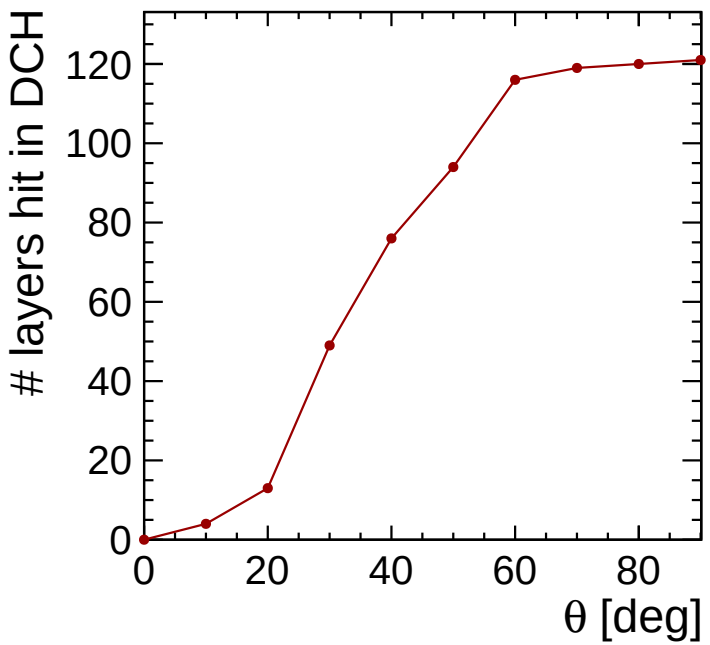

Material Budget Scan: work in progress

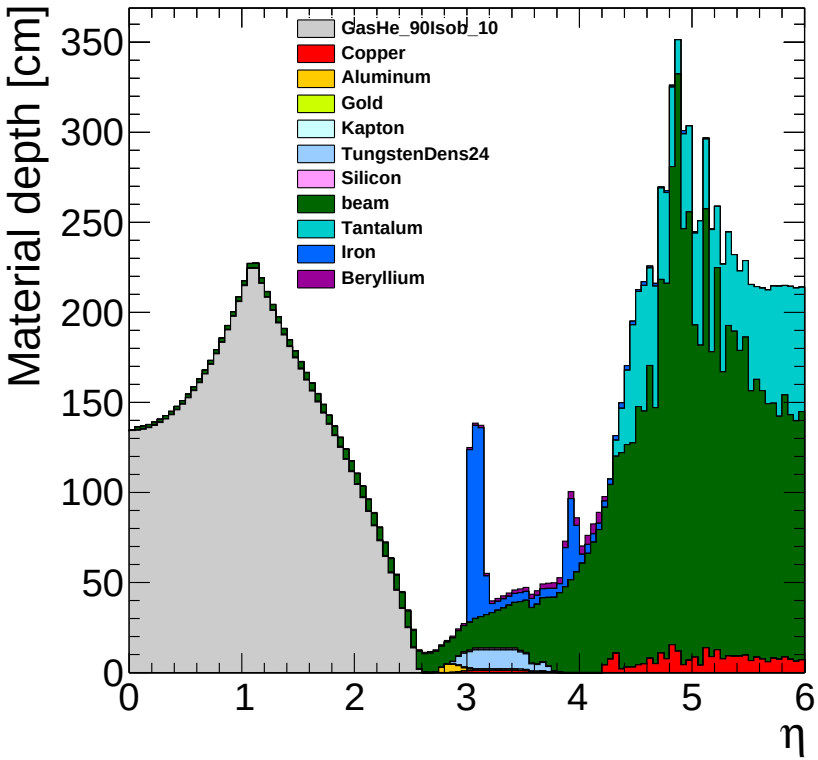

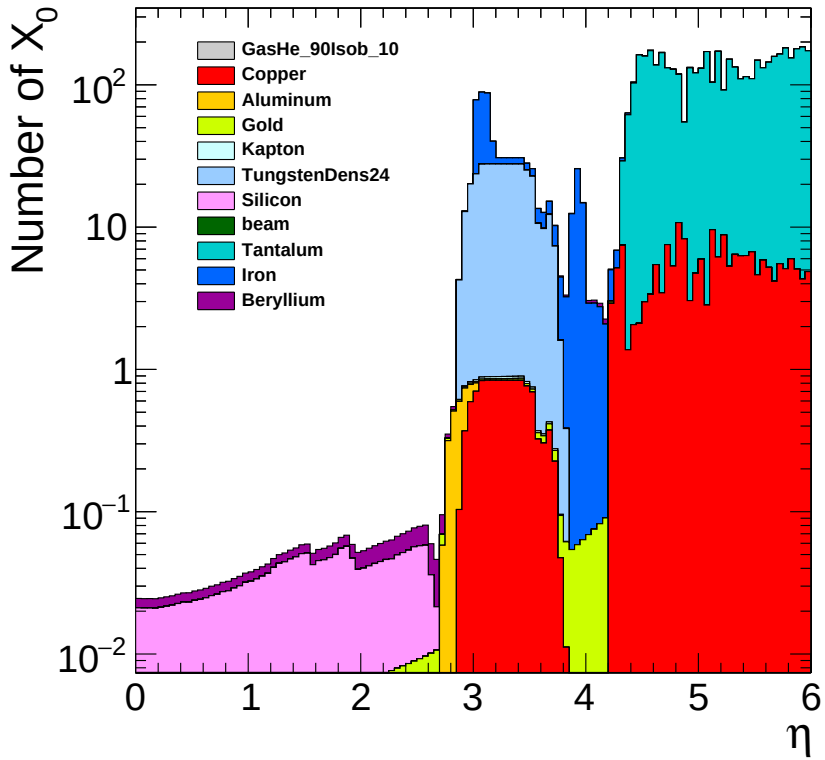

Background studies

- The effect of incoherent $e + e-$ pairs on the interaction region (IR)
- E_{cm} = 365 GeV
- Total nb. of particles: $\sim$ 6200

Momentum distribution

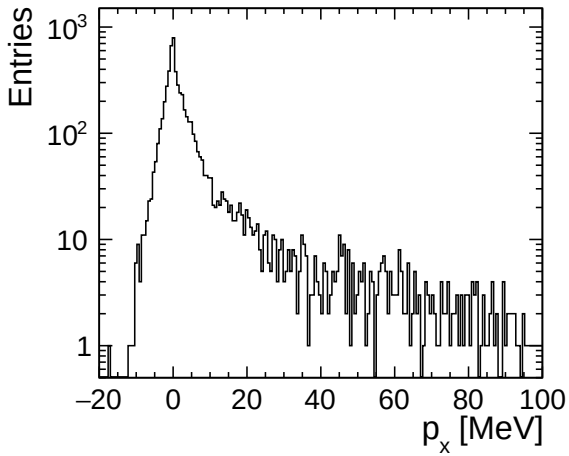

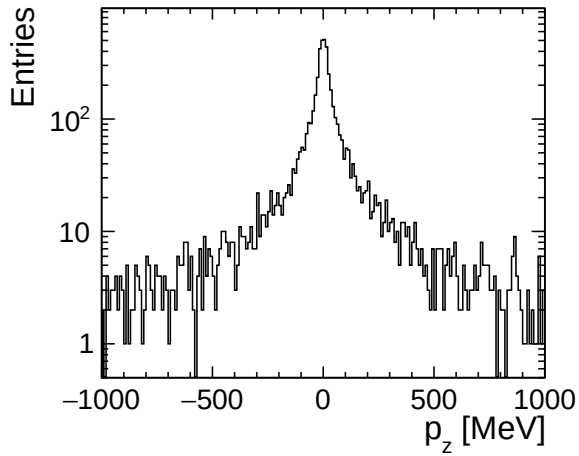

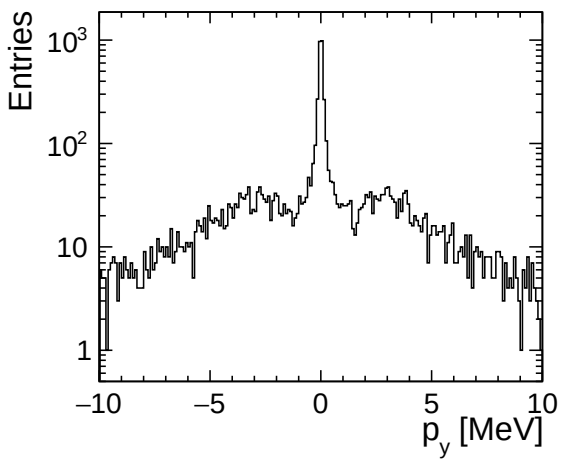

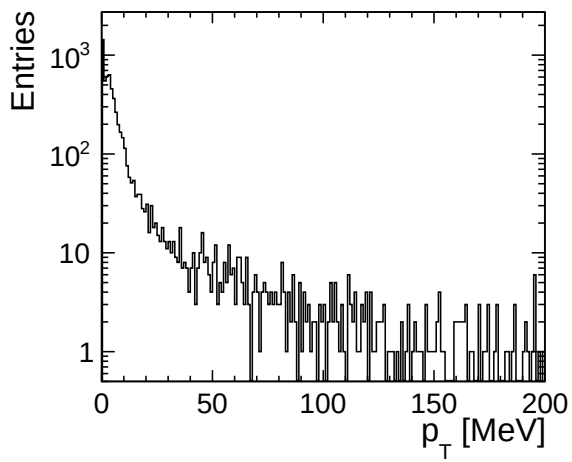

Background studies for the VXD: work in progress

- Vertex Barrel

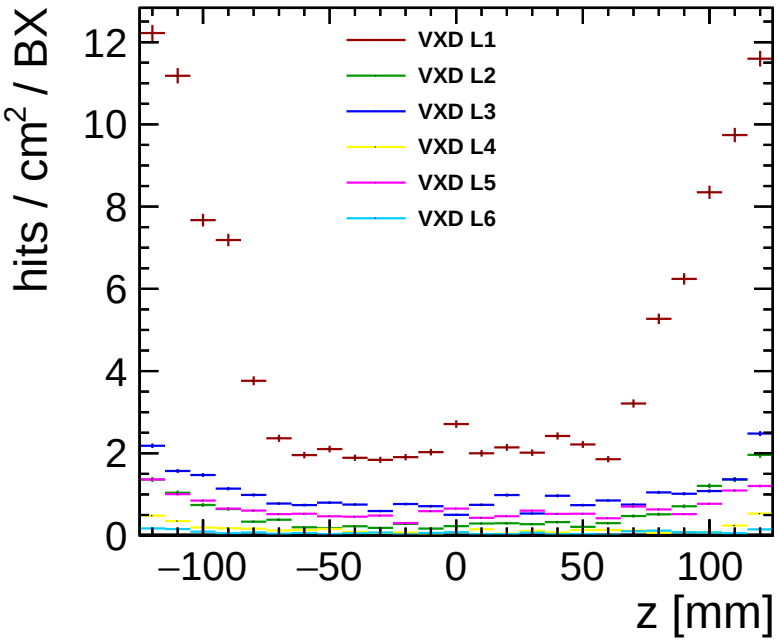

- Vertex Endcap

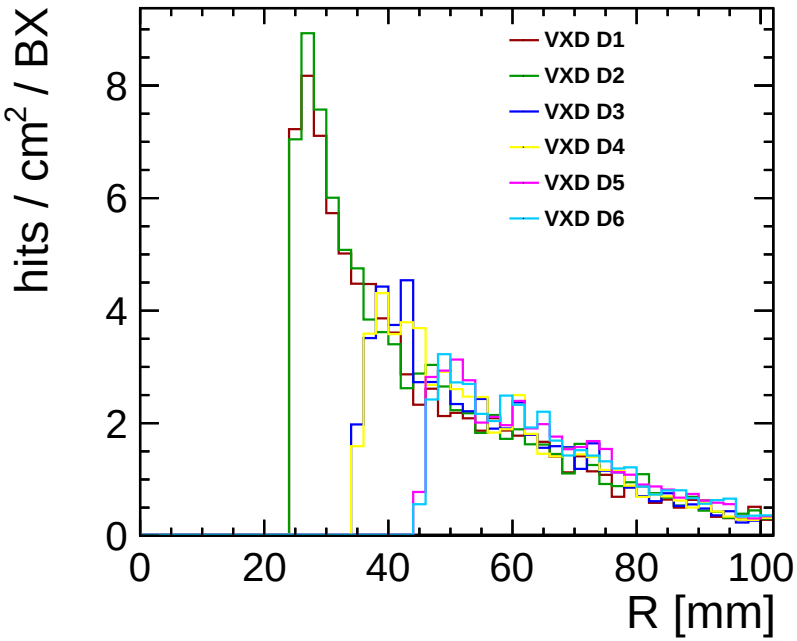

Detector	Total nb. of hits
Hits in the VXD barrel	2737
Hits in the VXD endcap	2537

- The trend is as expected
- More investigation & tuning on the hit reconstruction and cuts in Geant4 simulations is needed

Background studies for the DCH: work in progress

- Number of wires with different IDs recorded a signal
  - Average: 3345.7 wires

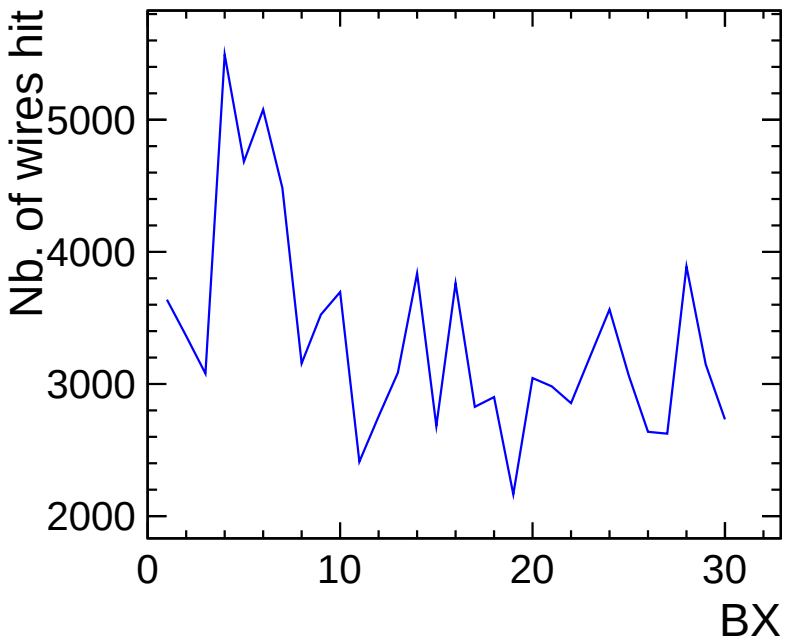

- Number of hits recorded per wire in the first BX
- Mostly 1-hit per wire
- Several hits per wire: pile-up or same

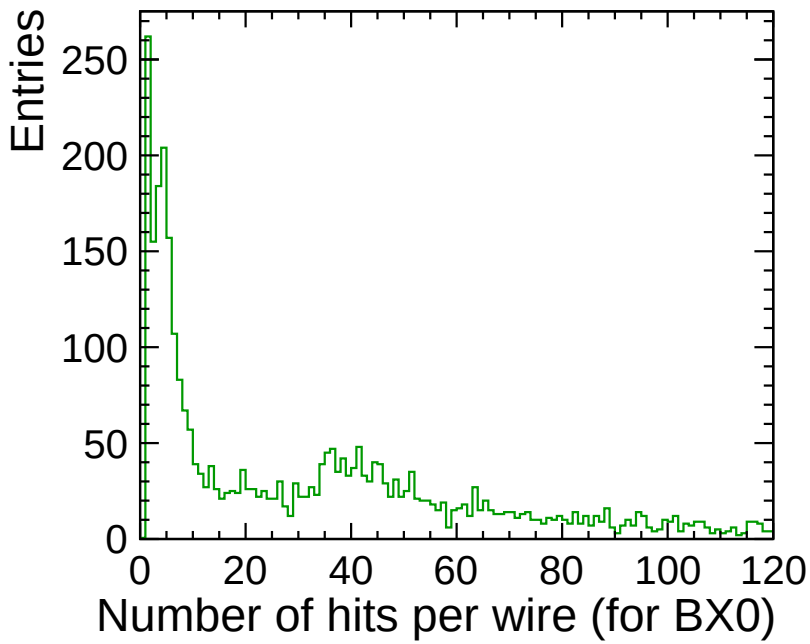

- To be investigated further: merging hits belonging to the same wire and having a drift time smaller than the maximum drift time in a cell.
- Occupancy as a function of the cell/voxel

Background studies for the DCH: number of hits per layer

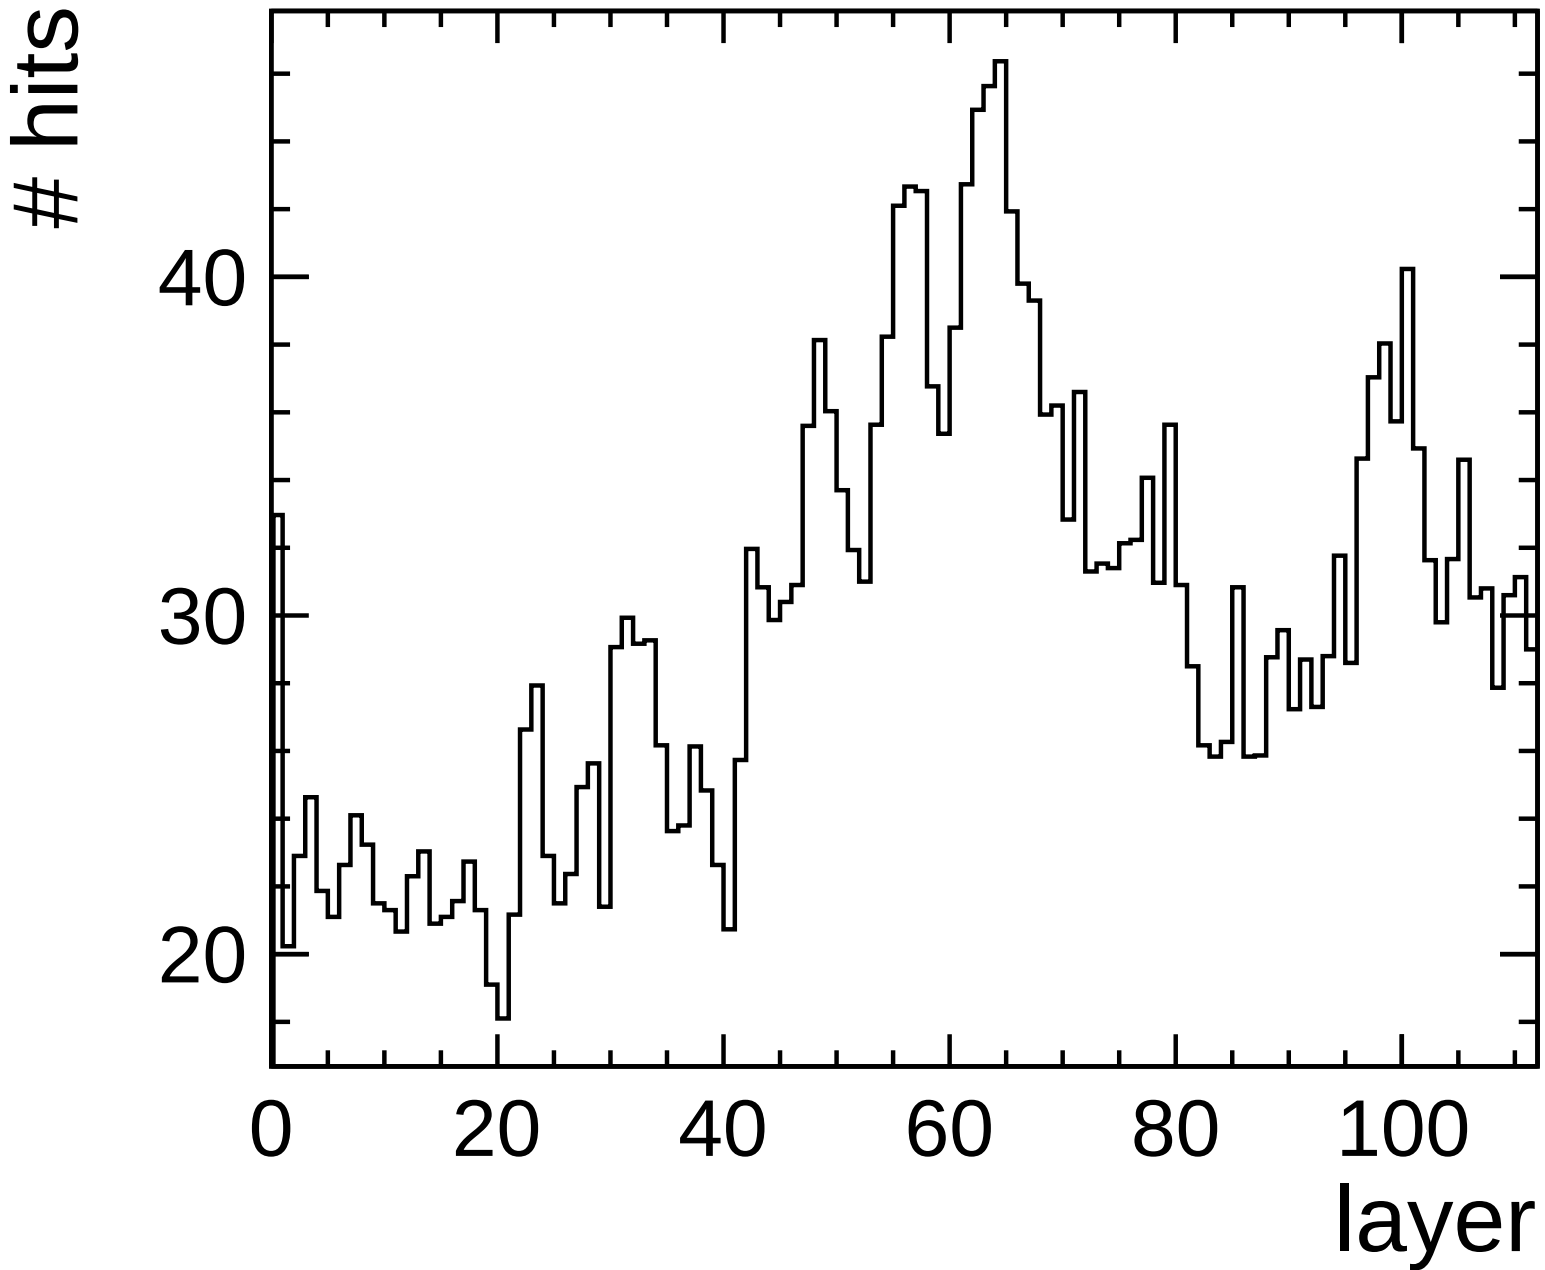

Summary & Outlook

- FCCee-detector concept simulation with FCCSW
  - Implementation of the geometry
  - Simulation
  - Validation
- Study of beam-induced backgrounds: e+e- incoherent pairs
  - Estimation of the occupancy in the VXD and DCH