

Outline

- Executive Summary
- Introduction
- Methodology
- Results
- Conclusion
- Appendix



Executive Summary

In this project, a rival company to SpaceX (i.e., SpaceY) uses SpaceX Falcon 9 rocket data to determine the rocket first stage landing successes and the cost of a launch. A summary for the methodologies and results described in this report is outlined below.

Summary of methodologies

- Data Collection
- · Data wrangling
- · Exploratory data analysis with data visualization and SQL
- · Building an interactive map with Folium
- Building Dashboard with Plotly Dash
- Predictive analysis (classification)

Summary of all results

- · Exploratory data analysis results
- · Interactive analytics demo in screenshots
- Predictive analysis results



Introduction

This capstone project is part of the IBM Data Science Professional Certificate. The goal of the project is to demonstrate proficiency in data science and machine learning techniques using a real-world data and to summarize the results in a report.

In this project, a rival company to SpaceX (i.e., SpaceY) uses SpaceX Falcon 9 rocket data to determine the rocket first stage landing successes and also uses the rocket data to determine the cost of a launch. Space Y uses the data to bid against SpaceX for a rocket launch. SpaceX advertises Falcon 9 rocket launch cost to be 62 million dollars. Whereas for other companies the cost of a rocket launch is more than 165 million dollars.

Throughout the project Python Jupyter note books are used to perform the data collection and analysis. These Jupyter note books and the final *.pdf report are saved in my GitHub repository webpage.

The major parts of this report include data collection methodology, data wrangling, exploratory data analysis (EDA), interactive data visualization, machine learning (ML) classification model development, and model evaluation. Finally, the accuracy of different ML algorithms are compared in predicting the future landing of the Falcon 9 first stage rocket.



Section 1

Methodology

OVERVIEW

HEIGHT	70 m / 229.6 ft
DIAMETER	3.7 m / 12 ft
MASS	549,054 kg / 1,207,920 lb
PAYLOAD TO LEO	22,800 kg / 50,265 lb
PAYLOAD TO GTO	8,300 kg / 18,300 lb
PAYLOAD TO MARS	4,020 kg / 8,860 lb

Methodology

Data used in this project were collected from SpaceX Rest API and from Wikipedia launch table. The wrangling of the collected data included cleaning, preparation for visualization and information extraction for usage in ML predictive models such as logistic regression, support vector machine (SVM), decision tree, and K-nearest neighbors (KNN).

In addition, exploratory data analysis (EDA) was performed using visualization and SQL. Lastly, Folium and Plotly Dash Python libraries were use in data representation and in the interactive visual analytics of the data.

Finally, predictive analysis was performed using classification models

for predicting if the first stage of Falcon 9 rocket will land successfully using Skikit-learn and also the accuracy of the model was determined.

Data Collection: Overview

Data collection and visualization major steps:



Portion of generated output data file: dataset_part1.csv

Α	В	C	D	Е	F	G	Н	1	J	K	L	М	N	0	P	Q
FlightNum	Date	BoosterV	e PayloadM	Orbit	LaunchSite	Outcome	Flights	GridFins	Reused	Legs	LandingPa	Block	ReusedCo	Serial	Longitude	Latitude
1	6/4/2010	Falcon 9	6123.548	LEO	CCSFS SLC	None Non	1	FALSE	FALSE	FALSE		3	1 0	B0003	-80.5774	28.56186
2	5/22/2012	Falcon 9	525	LEO	CCSFS SLC	None Non	1	FALSE	FALSE	FALSE		3	1 0	B0005	-80.5774	28.56186
3	3/1/2013	Falcon 9	677	ISS	CCSFS SLC	None Non	1	FALSE	FALSE	FALSE		3	1 0	B0007	-80.5774	28.56186
4	9/29/2013	Falcon 9	500	PO	VAFB SLC	False Ocea	1	FALSE	FALSE	FALSE)	1 0	B1003	-120.611	34.63209
5	12/3/2013	Falcon 9	3170	GTO	CCSFS SLC	None Non	1	FALSE	FALSE	FALSE			1 0	B1004	-80.5774	28.56186
6	1/6/2014	Falcon 9	3325	GTO	CCSFS SLC	None Non	1	FALSE	FALSE	FALSE			1 0	B1005	-80.5774	28.56186
7	4/18/2014	Falcon 9	2296	ISS	CCSFS SLC	True Ocea	1	FALSE	FALSE	TRUE			1 0	B1006	-80.5774	28.56186
8	7/14/2014	Falcon 9	1316	LEO	CCSFS SLC	True Ocea	1	FALSE	FALSE	TRUE			1 0	B1007	-80.5774	28.56186
9	8/5/2014	Falcon 9	4535	GTO	CCSFS SLC	None Non	1	FALSE	FALSE	FALSE			1 0	B1008	-80.5774	28.56186
10	9/7/2014	Falcon 9	4428	GTO	CCSFS SLC	None Non	1	FALSE	FALSE	FALSE			1 0	B1011	-80.5774	28.56186
2.27	- 1 1			7227					21102	21122			20			

Data Collection: SpaceX API

FlightNumber

1 2010-06-04

2 2012-05-22

3 2013-03-01

4 2013-09-29

Date BoosterVersion PayloadMass Orbit

Falcon 9 6123.547647 LEO

Falcon 9 677 000000

525 000000 LEO

Request response from SpaceX
API using get request and covert
data to .Jason file

Use custom functions to clean data

Clean data and assign data to dictionary and data frame

Filter data to include only Falcon 9 launches and export data to a csv file: dataset part1

```
1 static json url='https://cf-courses-data.s3.us.cloud-object-storage.appdomain.cloud/IBM-DS0321EN-SkillsNetwork/datasets/API call spacex api.json'
      1 # convert the json result into a dataframe using json normalize method
      2 data=pd.json normalize(response.json())
1 # Lets take a subset of our dataframe keeping only the features we want and the flight number, and date utc.
 2 data = data[['rocket', 'payloads', 'launchpad', 'cores', 'flight number', 'date utc']]
 4 # We will remove rows with multiple cores because those are falcon rockets with 2 extra rocket boosters and rows that have multiple payloads in a single rocket,
5 data = data[data['cores'].map(len)==1]
6 data = data[data['payloads'].map(len)==1]
8 # Since payloads and cores are lists of size 1 we will also extract the single value in the list and replace the feature.
9 data['cores'] = data['cores'].map(lambda x : x[0])
10 data['payloads'] = data['payloads'].map(lambda x : x[0])
12 # We also want to convert the date utc to a datetime datatype and then extracting the date leaving the time
13 data['date'] = pd.to datetime(data['date utc']).dt.date
15 # Using the date we will restrict the dates of the launches
16 data = data[data['date'] <= datetime.date(2020, 11, 13)]
                                           Portion of output
    1 data_falcon9.head()
```

LaunchSite Outcome Flights GridFins Reused Legs LandingPad Block ReusedCount Serial Longitude Latitude

0 B0003 -80.577366 28.561857

0 B0005 -80 577366 28 561857

D B0007 -80.577366 28.561857

0 B1003 -120,610829 34,632093 0 B1004 -80,577366 28,561857


Data Collection: Scraping

Step 1: Perform HTTP get to request Falcon 9 HTML page and create Beautiful Soup object from HTML


Step 2: Extract all column/variable names from the HTML table header


Step3: Create a data frame by parsing the launch HTML tables

Step 4: export data into CSV file (spacex_web_scraped.csv)

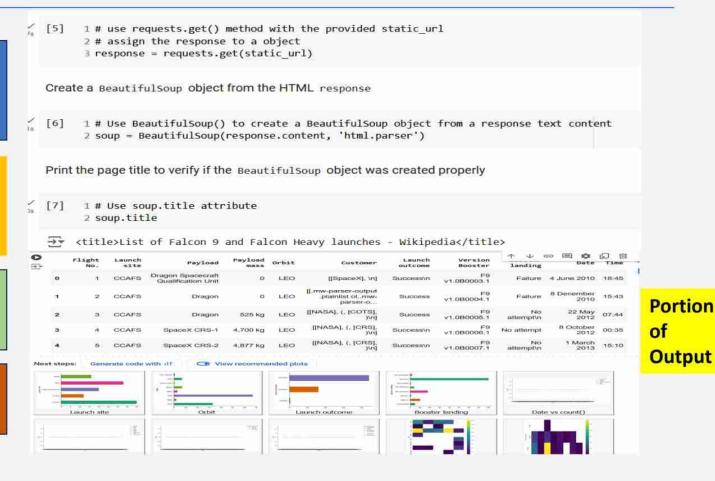


Data Collection: Data Wrangling

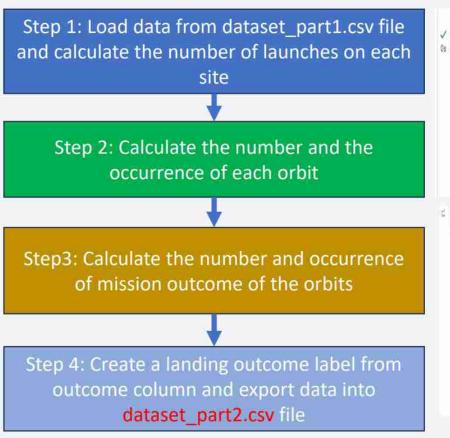

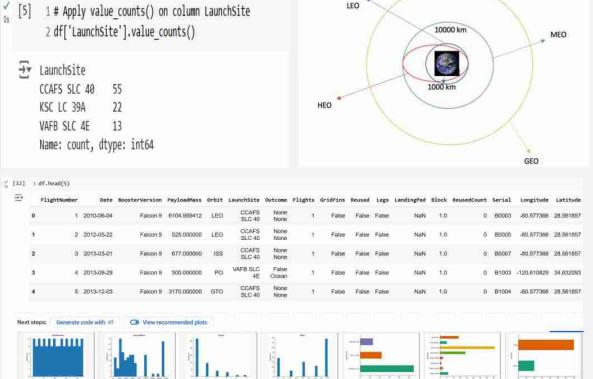


EDA and Data Visualization


Use Matplotlib and Seaborn for data visualization

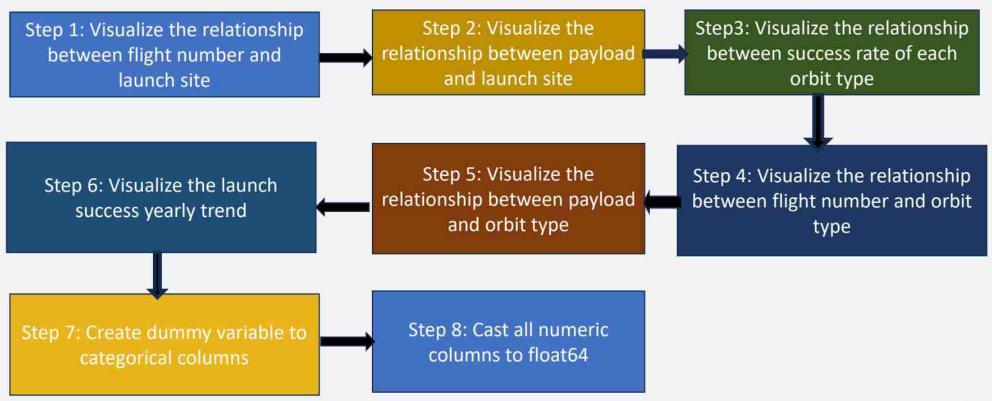

EDA with SQL

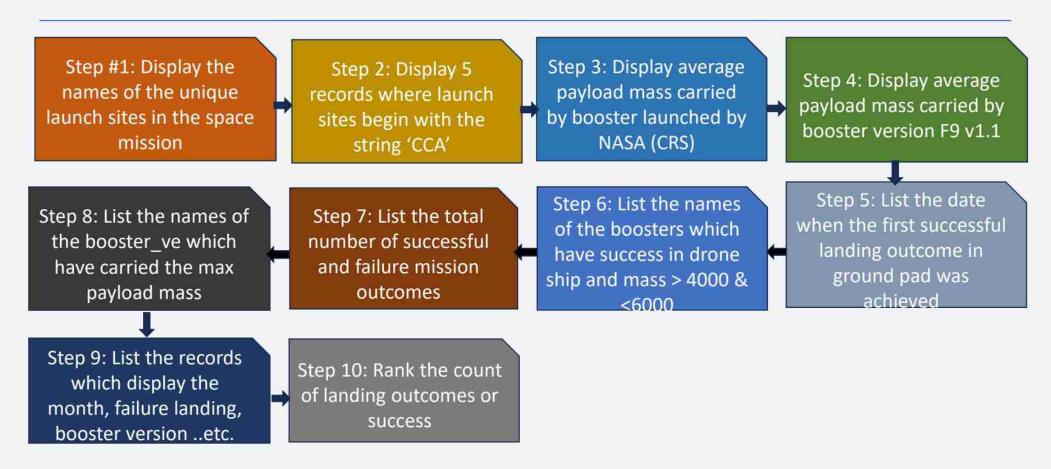

Build an Interactive Map with Folium

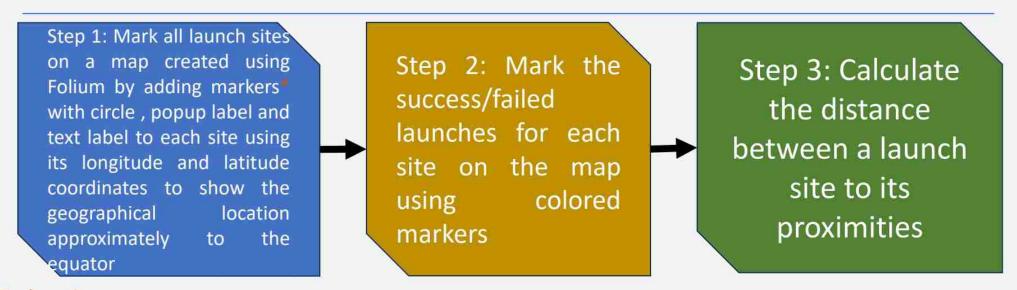


* Explanation:


From the visual analysis of the launch site KSC LC-39A we can clearly see that it is:

- relative close to railway (15.23 km)
- · relative close to highway (20.28 km)
- relative close to coastline (14.99 km)
- Also the launch site KSC LC-39A is relative close to its closest city Titusville (16.32 km).
- Failed rocket with its high speed can cover distances like 15-20 km in few seconds. It could be potentially dangerous to populated areas.


Build a Dashboard with Plotly Dash

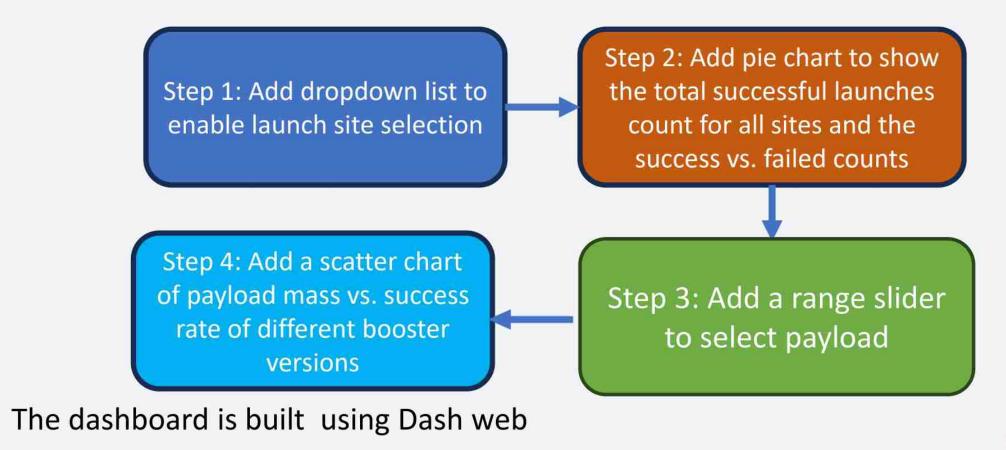

Predictive Analysis (Classification): Overview

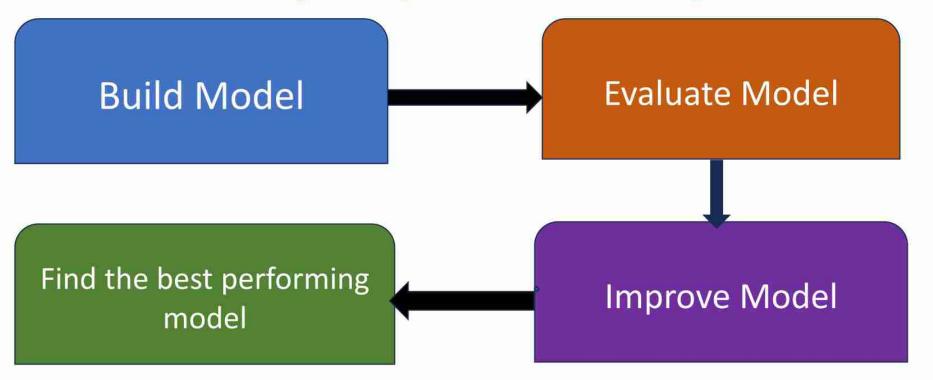

Predictive Analysis (Classification) Steps

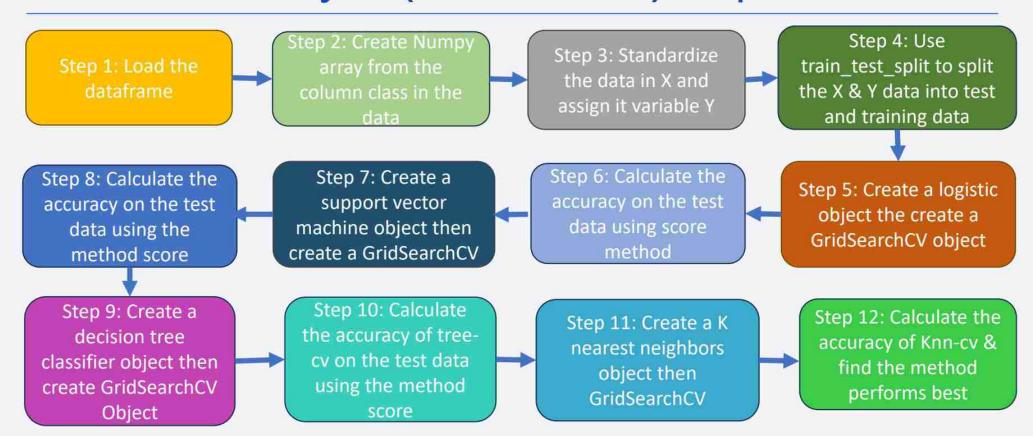

Results

- Exploratory data analysis results.
- Interactive analytics demo in screenshots.
- Predictive analysis results.

Section 2

Insights drawn from EDA

FIRST STAGE


OVERVIEW | ENGINES | LANDING LEGS

Falcon 9's first stage incorporates nine Merlin engines and aluminum-lithium alloy tanks containing liquid oxygen and rocket-grade kerosene (RP-1) propellant.

Falcon 9 generates more than 1.7 million pounds of thrust at sea level.


Flight Number vs. Launch Site

- The majority of the flights were launched from the CCAFS SLC 40 sites.
- The VAFB SLC 4E and KSC LC 39A sites have higher success rates than other sites.
- Newer flights have higher success rates than older flights.

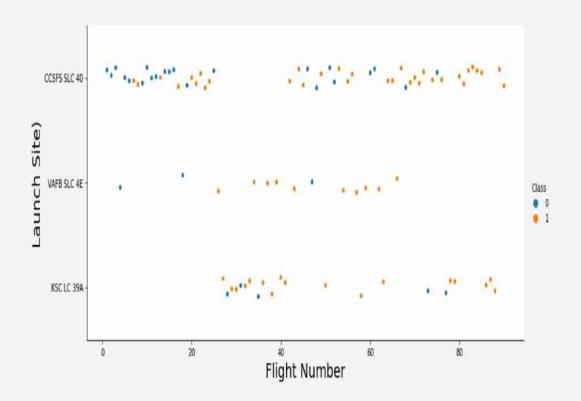


Payload Mass vs. Launch Site

- The majority of the flights with payload mass above 7000 Kg were successful.
- KSC LC 39A success rate for payload mass under 5500 kg is 100%.
- For all launch sites the success rate is proportional to the payload mass.

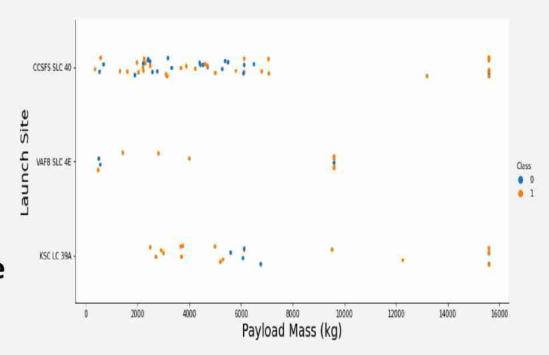


Success Rate vs. Orbit Type

- The OS orbit has 0% success rate.
- The ELS-1, GEO, HEO and SSO orbits have 100% success rate.
- Orbits GTO, ISS, LEO, MEO and PO success rate is higher than 50% and less than 75%.

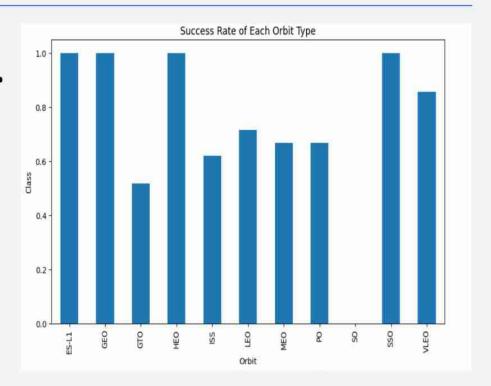


Flight Number vs. Orbit Type

- The majority of the flights were launches to the ISS and GTO orbits.
- The data suggests that there is no relationship between the flight number and the orbit type.

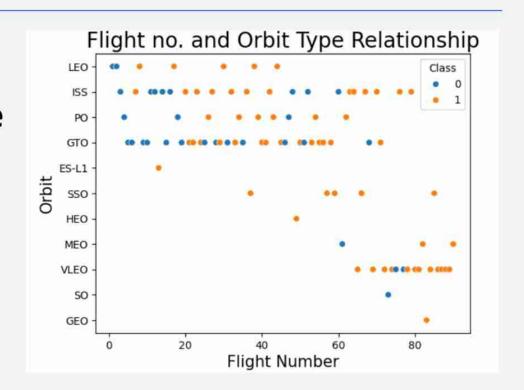


Payload Mass vs. Orbit Type

- Payload masses above 10000
 Kg were placed in PO, ISS and
 LEO orbits.
- Payload masses above 4000 and less than 8000 Kg were placed in the GTO orbit.

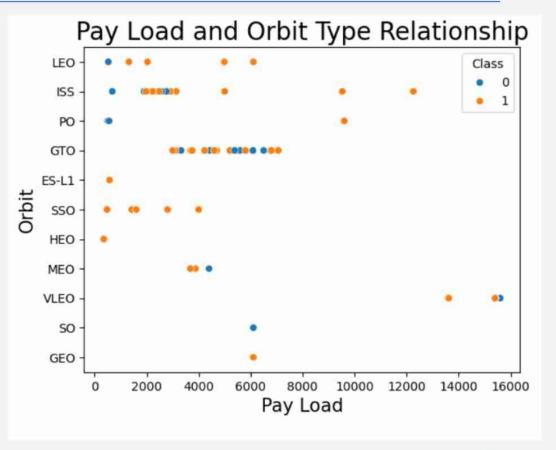


Launch Success Yearly Trend

- The launches success rate increased steadily since 2013.
- The increase in the success rate between 2013 and 2017 was linear.
- During 2018 there was a drop in the launches success rate.

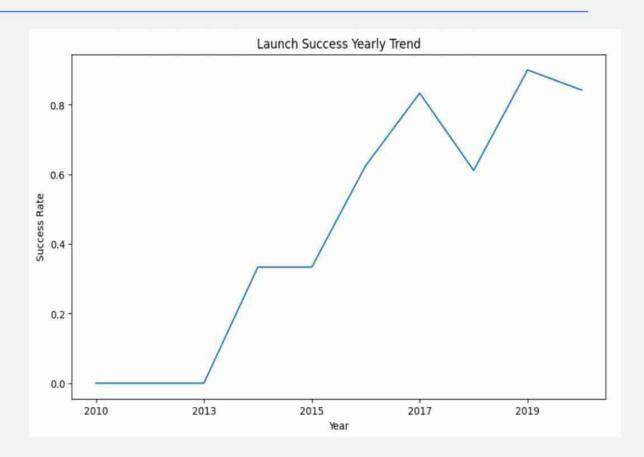

All Launch Site Names

The names of the unique launch sites and the query structure for obtaining these sites is shown below.

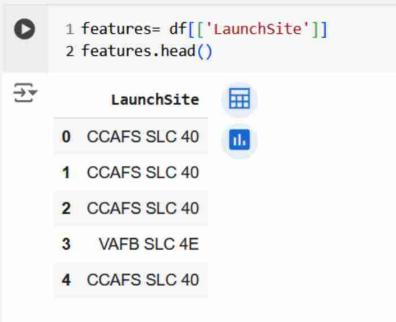

Launch Site Names Begin with 'CCA'

5 records for launch sites begin with the string 'CCA' and the query used for obtaining the information is shown below.

Orbit Cu	Customer Mission_C	Outcome Landing_Outcome
LEO Spac	aceX Success	Failure (parachute)
	SUCCESS	Failure (parachute)
LEO NAS	SA (COTS) Success	No attempt
LEO NAS	SA (CRS) Success	No attempt
LEO NAS	SA (CRS) Success	No attempt
(IS (IS LE (IS	SS) NR(SS) NA(SS) NA(SS) NA(SS) NA(SS) NA(SS)	SS) NRO Success EO NASA (COTS) Success NASA (CRS) Success EO NASA (CRS) Success

Total Payload Mass

- The calculated total payload mass carried by boosters from NASA site =45596 Kg.
- The query for obtaining the total payload mass is shown below.

```
%sql select SUM(PAYLOAD_MASS__KG_) from SPACEXTABLE where "Customer" like 'NASA (CRS)%'
  * sqlite:///my_data1.db
Done.
SUM(PAYLOAD_MASS__KG_)
48213
```

Average Payload Mass by F9 v1.1

- The average payload mass carried by booster version F9 v1.1=2534.7 Kg.
- Furthermore, the query used to calculate the average payload mass carried by booster F9 v1.1 is shown below.

```
%sql select AVG(PAYLOAD_MASS__KG_) from SPACEXTABLE where "Booster_Version" LIKE 'F9 v1.1%'

* sqlite://my_data1.db
Done.

AVG(PAYLOAD_MASS__KG_)
2534.6666666666665
```

First Successful Ground Landing Date

- The first successful landing outcome on a ground pad was in 2015-12-22.
- The query for obtaining this result is shown below.

```
[ ] 1 %sql SELECT MIN(Date) AS first_successful_landing_date FROM SPACEXTABLE WHERE landing_outcome = 'Success (ground pad)';

* sqlite://my_datal.db
Done.
first_successful_landing_date
2015-12-22
```

Successful Drone Ship Landing with Payload between 4000 and 6000

- List of boosters which have successfully landed on drone ship and had payload mass greater than 4000 but less than 6000 is shown below.
- The query used in obtaining this information is shown below.

```
List the names of the boosters which have success in drone ship and have payload mass greater than 4000 but less than 6000

[ ] 1 %sql SELECT Booster_Version FROM SPACEXTABLE WHERE landing_outcome = 'Success (drone ship)' AND PAYLOAD_MASS__KG_ > 4000 AND PAYLOAD_MASS__KG_

* sqlite://my_datal.db
Done.

Booster_Version
F9 FT B1022
F9 FT B1026
F9 FT B1021.2
F9 FT B1031.2
```

Total Number of Successful and Failure Mission Outcomes

- The total number of successful and failed missions is as follows:
 - Failure (in flight)= 1
 - Successful number of flights= 98
- The query result is shown below.

```
1 %sql SELECT mission_outcome, COUNT(*) AS total_count FROM SPACEXTABLE WHERE mission_outcome IN ('Success', 'Failure (in flight)') GROUP BY mis
2

* sqlite:///my_data1.db
Done.

Mission_Outcome total_count
Failure (in flight) 1
Success 98
```

Boosters Carried Maximum Payload

- List of the boosters which have carried the maximum payload mass are shown below.
- The query used in obtaining the booster names is shown below.

```
List the names of the booster_versions which have carried the maximum payload mass. Use a subquery
[ ] 1 %sql SELECT booster_version FROM SPACEXTABLE WHERE PAYLOAD_MASS__KG_ = (SELECT MAX (PAYLOAD_MASS__KG_) FROM SPACEXTABLE);
    * sqlite:///my_data1.db
     Booster_Version
     F9 B5 B1048.4
     F9 B5 B1049.4
     F9 B5 B1051.3
     F9 B5 B1056.4
     F9 B5 B1048.5
     F9 B5 B1051.4
     F9 B5 B1049.5
     F9 B5 B1060.2
     F9 B5 B1058.3
     F9 B5 B1051.6
     F9 B5 B1060.3
     F9 B5 B1049.7
```

2015 Launch Records

- List of the failed "landing_outcomes" in drone ship, their booster version, and the launch site name during year 2015 is shown below.
- The query used in obtaining the information is shown below.

```
1 %sql SELECT CASE WHEN substr(Date, 6, 2) = '01' THEN 'January' WHEN substr(Date, 6, 2) = '02' THEN 'February' WHEN substr(Date, 6, 2) = '03' TH

* sqlite:///my_data1.db
Done.

month_name Booster_Version Launch_Site Landing_Outcome
January F9 v1.1 B1012 CCAFS LC-40 Failure (drone ship)

April F9 v1.1 B1015 CCAFS LC-40 Failure (drone ship)
```

Rank Landing Outcomes Between 2010-06-04 and 2017-03-20

- A rank of the count of landing outcomes (such as Failure (drone ship) or success (ground pad)) between the dates 2010-06-04 and 2017-03-20, in descending order is shown below.
- The query used to obtain the results is shown below.

```
* sqlite://my_data1.db
Done.
Landing_Outcome outcome_count
No attempt 10
Success (drone ship) 5
Failure (drone ship) 5
Success (ground pad) 3
Controlled (ocean) 3
Uncontrolled (ocean) 2
Failure (parachute) 2
Precluded (drone ship) 1
```

Section 3

Launch Sites Proximities Analysis

FALCON 9

INTERSTAGE

The interstage is a composite structure that connects the first and second stages, and houses the pneumatic pushers that allow the first and second stage to separate during flight.

GRID FINS

Falcon 9 is equipped with four hypersonic grid fins positioned at the base of the interstage. They orient the rocket during reentry by moving the center of pressure.



USA Launch Sites in California and Florida


- Most of Launch sites considered in this project are in proximity to the Equator line. Launch sites are made at the closest point possible to Equator line, because anything on the surface of the Earth at the equator is already moving at the maximum speed (1670 kilometers per hour). For example launching from the equator makes the spacecraft move almost 500 km/hour faster once it is launched compared half way to north pole.
- All launch sites considered in this project are in very close proximity to the coast While starting rockets towards the ocean we minimize the risk of having any debris dropping or exploding near people.






Color Labels Showing the Launch Sites on a Map

	Launch Site	Lat	Long	marker_color
0	CCAFS LC-40	28.562302	-80.577356	red:
1	CCAFS LC-40	28.562302	-80.577356	red
2	CCAFS LC-40	28.562302	-80.577356	red.
3	CCAFS LC-40	28.562302	-80.577356	red
4	CCAFS LC-40	28.562302	-80.577356	red.
5	CCAFS LC-40	28.562302	-80.577356	red
6	CCAFS LC-40	28.562302	-80,577356	red
7	CCAFS LC-40	28.562302	-80.577356	red
В	CCAFS LC-40	28.562302	-80.577356	red
9	CCAFS LC-40	28.562302	-80.577356	red
10	CCAFS LC-40	28.562302	-80.577356	red
11	CCAFS LC-40	28.562302	-80.577356	red
12	CCAFS LC-40	28.562302	-80.577356	red
13	CCAFS LC-40	28.562302	-80.577356	red
1.4	CCAFS LC-40	28.562302	-80.577356	red
15	CCAFS LC-40	28.562302	-80.577356	red
16	CCAFS LC-40	28.562302	-80.577356	red
17	CCAFS LC-40	28.562302	-80.577356	green
18	CCAFS LC-40	28,562302	-80.577356	green
19	CCAFS LC-40	28.562302	-80.577356	red
20	CCAFS LC-40	28.562302	-80.577356	areen

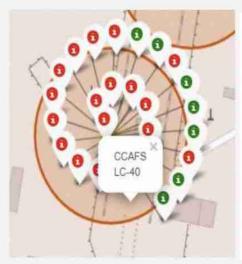

36	KSC LC-39A	28.573255	-80.646895	green
7	KSC LC-39A	28.573255	-80.646895	red
38	KSC LC-39A	28.573255	-80.646895	green
39	KSC LC-39A	28.573255	-80.646895	green
40	KSC LC-39A	28.573255	-80.646895	red
41	KSC LC-39A	28.573255	-80.646895	green
42	KSC LC-39A	28.573255	-80.646895	green
43	KSC LC-39A	28.573255	-80.646895	red
44	KSC LC-39A	28.573255	-80.646895	green
45	KSC LC-39A	28.573255	-80.646895	green
46	KSC LC-39A	28.573255	-80.646895	green
47	KSC LC-39A	28.573255	-80.646895	green
48	KSC LC-39A	28.573255	-80.646895	green

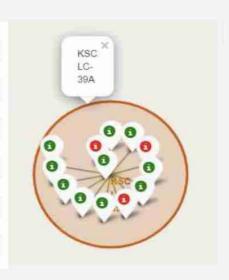


Green= Successful Launch Red= Failed Launch

Safe Distance to Launch Site

The obtained results indicate that all launch sites are at safe distance from railway lines and cities.



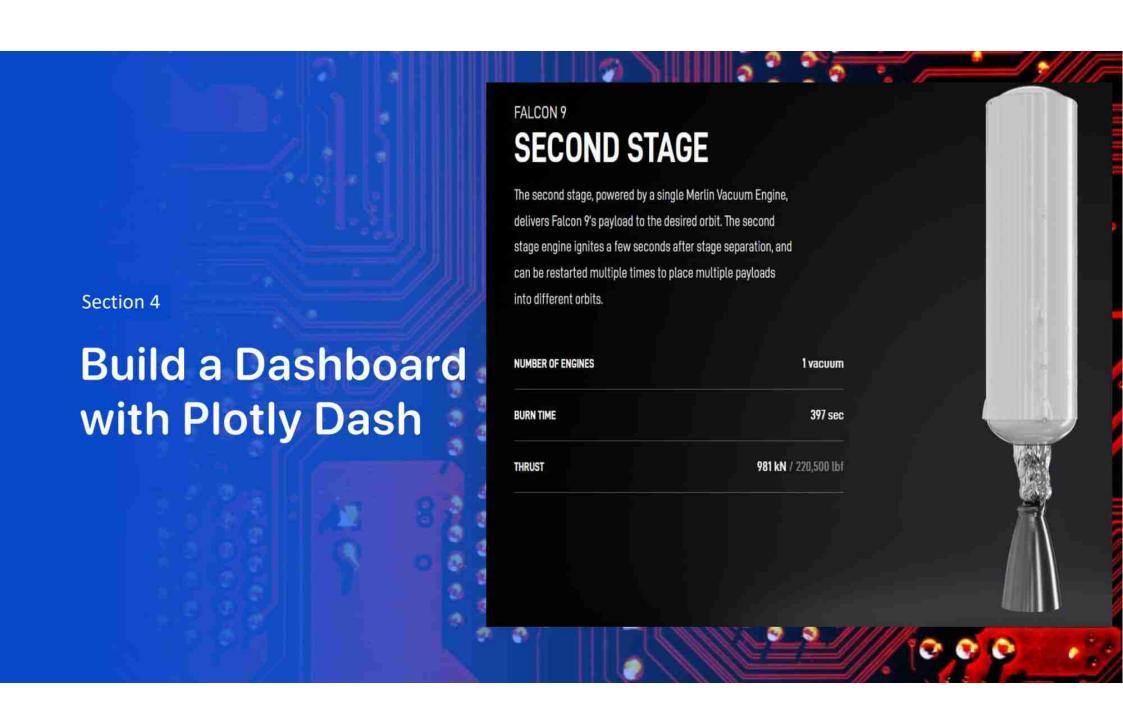


Total Launch Success for All Sites



The highest success launch rates were recorded at these sites:

- 1. KSC LC-39A (41.7%)
- 2. CCAFS LC-40 (29.2%)

KSC LC-39 Launch Site Success Rate

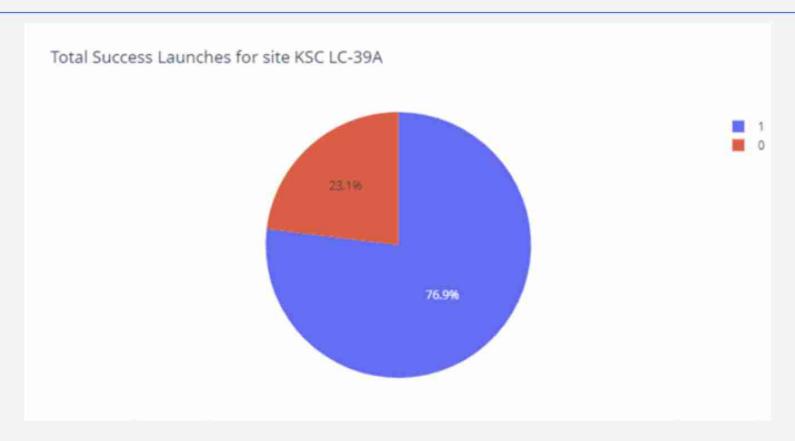

Site KSC LC-39 success rate is 76.9%

Payload vs. Launch Outcome for All Sites

Highest success rate for payloads is between 2000 and 5500 Kgs




Section 5

Predictive Analysis (Classification)




Classification Accuracy

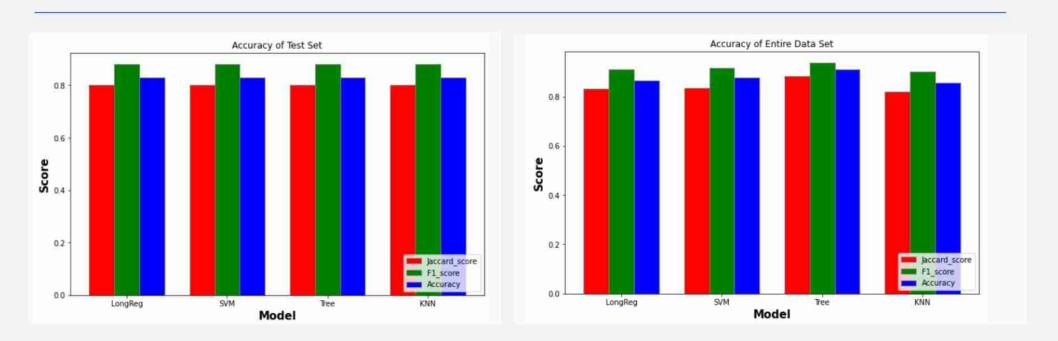


- Using the test set the same accuracy results were obtained from the four models.
- The Tree Model provided the best accuracy results for the entire data set.

Confusion Matrix

- The confusion matrix analysis suggests that the best performing model is the Logistic Regression model.
- The confusion matrix predicts 13 true positives, 3 false positives, 3 true positive, and 0 false negative.



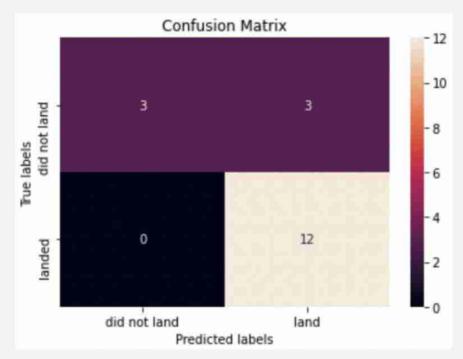

Conclusions

- The success rate for the rocket launches increased after 2013.
- Orbits GEO, HEO, ES-L1 and SSO have 100% launch success rate.
- Launch site KSC LC-39A has the highest success rate.
- The Decision Tree model is the best ML algorithm for analyzing the SpaceX data set and provided the best accuracy results.



Appendix



