

# Prediction of Chronic Disease Risk Using Nutrition, Lifestyle & Clinical Data from The Irish Longitudinal Study on Ageing (TILDA)



Abderahman Haouit

CSIS Research Centre

Department of Computer Science and Information Systems

Faculty of Science and Engineering

University of Limerick

Submitted to the University of Limerick for the degree of

*Artificial Intelligence (MSc) 2026*

---

- 
1. Supervisor: Dr. Alison O'Connor  
Computer Science & Information Systems  
University *of* Limerick  
Ireland

# Abstract

**Background:** Chronic diseases such as Cardiovascular Disease (CVD), Diabetes Mellitus (DM), Frailty, Gait, Exercise, Falls and Fractures (FR), and obesity represent major contributors to morbidity in older adults. While traditional prediction models focus heavily on clinical and functional indicators, the contribution of nutritional and lifestyle factors to early risk detection remains underexplored.

**Methods:** This thesis applies machine learning techniques to data from The Irish Longitudinal Study on Ageing (TILDA), a national representative longitudinal study of older adults. Five waves of socio-demographic, clinical, nutritional, psychological, and behavioural data, with selected variables from the externally produced Research and Development Corporation (RAND) + Harmonised TILDA dataset, together were systematically cleaned and standardised using a multi-stage preprocessing pipeline. Predictive models, including (*models  $x$ ,  $y$ ,  $z$* ) were developed to estimate the risk of chronic disease and FR-related outcomes. Model performance was evaluated using (*mention examples*), and feature importance was used to assess predictive value.

**Results:** TBD

**Conclusions:** TBD

**Keywords:** ageing, (Artificial Intelligence (AI)), Machine Learning (ML), predictive modelling, Frailty, Gait, Exercise, Falls and Fractures (FR), chronic disease, nutrition, The Irish Longitudinal Study on Ageing (TILDA)

## **Declaration**

I Abderahman Haouit declare that I have produced this thesis without the prohibited assistance of third parties and without making use of aids other than those specified; notions taken over directly or indirectly from other sources have been identified as such. This thesis has not previously been presented in identical or similar form to any other Irish or foreign examination board.

The thesis work was conducted from 2025 to 2026 under the supervision of Dr. Alison O'Connor at University of Limerick.

Limerick, 2026

## GLOSSARY

---

## **Acknowledgements**

I would like to acknowledge my supervisor, Dr. Alison O'Connor, for her guidance, support, and for providing a well organised environment throughout the implementation of this project.

I would also like to thank the UL Science and Engineering Research Ethics Committee for approving the ethical aspects of this research. Special thanks to the Irish Social Science Data Archive (ISSDA) team for facilitating access to the TILDA dataset, collected by Trinity College Dublin.

Your dedication goes here. Open the dedication.tex file found at:  
0\_frontmatter/dedication.tex



# Contents

|                                                                |            |
|----------------------------------------------------------------|------------|
| <b>List of Tables</b>                                          | <b>vi</b>  |
| <b>List of Figures</b>                                         | <b>vii</b> |
| <b>List of Abbreviations</b>                                   | <b>ix</b>  |
| <b>1 Introduction</b>                                          | <b>1</b>   |
| 1.1 Research problem and motivation . . . . .                  | 2          |
| 1.2 Research aims and objectives . . . . .                     | 3          |
| 1.3 Contributions of the research . . . . .                    | 4          |
| 1.4 Thesis Outline . . . . .                                   | 4          |
| <b>2 Literature Review</b>                                     | <b>6</b>   |
| 2.1 Methodology . . . . .                                      | 6          |
| 2.1.1 Search strategy and database screening . . . . .         | 7          |
| 2.1.2 Quality and relevance evaluation . . . . .               | 9          |
| 2.1.3 Synthesis and Integration . . . . .                      | 10         |
| 2.2 Frailty and physical function . . . . .                    | 12         |
| 2.2.1 Probabilistic interpretation of frailty . . . . .        | 12         |
| 2.2.2 Bayesian updating of frailty risk . . . . .              | 13         |
| 2.3 Mental health in older adults . . . . .                    | 13         |
| 2.4 Nutrition and biological ageing . . . . .                  | 14         |
| 2.4.1 Bayesian perspective on nutritional biomarkers . . . . . | 15         |
| 2.4.2 Contextual and integrative considerations . . . . .      | 15         |
| 2.5 Machine Learning in ageing and chronic disease . . . . .   | 16         |
| 2.5.1 Feature sets in ML studies . . . . .                     | 16         |

## CONTENTS

---

|          |                                                             |           |
|----------|-------------------------------------------------------------|-----------|
| 2.5.2    | ML models used . . . . .                                    | 16        |
| 2.5.3    | Performance and Validation . . . . .                        | 17        |
| 2.5.4    | Explainability in ML for ageing . . . . .                   | 17        |
| 2.6      | Gaps in the Literature . . . . .                            | 18        |
| 2.7      | Chapter Summary . . . . .                                   | 19        |
| <b>3</b> | <b>Technical Approach</b>                                   | <b>21</b> |
| 3.1      | Study Design . . . . .                                      | 21        |
| 3.2      | Cohort Definition . . . . .                                 | 21        |
| 3.2.1    | Cohort inclusion criteria . . . . .                         | 22        |
| 3.3      | Data Collection . . . . .                                   | 22        |
| 3.3.1    | Data Overview . . . . .                                     | 24        |
| 3.3.2    | Variable filtering criteria . . . . .                       | 24        |
| 3.3.3    | Variable filtering flowchart . . . . .                      | 25        |
| 3.4      | Thematic Grouping . . . . .                                 | 25        |
| 3.4.1    | Derived variable prefixes . . . . .                         | 27        |
| 3.4.2    | Feature groups . . . . .                                    | 27        |
| <b>4</b> | <b>Implementation Details</b>                               | <b>31</b> |
| 4.1      | Data Preprocessing . . . . .                                | 31        |
| 4.1.1    | Input data shape (post manual filtering) . . . . .          | 31        |
| 4.2      | Cleaning Engine . . . . .                                   | 32        |
| 4.2.1    | Stage 1: Variable scenario mapping and validation . . . . . | 33        |
| 4.2.2    | Stage 2: Deterministic six step cleaning sequence . . . . . | 34        |
| 4.2.3    | Scenario steps and their technical focus . . . . .          | 35        |
| 4.3      | Cleaning Validation . . . . .                               | 36        |
| <b>5</b> | <b>Empirical Evaluation</b>                                 | <b>37</b> |
| 5.1      | References . . . . .                                        | 37        |
| <b>6</b> | <b>Conclusion</b>                                           | <b>39</b> |
| 6.1      | Summary . . . . .                                           | 39        |
| 6.2      | Conclusions . . . . .                                       | 39        |
| 6.2.1    | Data availability Statement . . . . .                       | 39        |

## CONTENTS

---

|                                                               |           |
|---------------------------------------------------------------|-----------|
| 6.2.2 Ethics Statement . . . . .                              | 39        |
| 6.3 Contributions . . . . .                                   | 40        |
| 6.4 Future Work . . . . .                                     | 40        |
| <b>A Python code for exporting PMF metadata to CSV</b>        | <b>41</b> |
| <b>B Scenario Cleaning Pipeline Tables</b>                    | <b>44</b> |
| <b>C First Stage: Scenario Variable Mapping</b>               | <b>47</b> |
| <b>D Second Stage: Deterministic six step cleaning engine</b> | <b>52</b> |
| <b>References</b>                                             | <b>57</b> |

# List of Tables

|     |                                                                                      |    |
|-----|--------------------------------------------------------------------------------------|----|
| 2.1 | Database searches and number of studies per database 2.3 [1]. . .                    | 8  |
| 2.2 | Quality evaluation of Systematic Literature Review (SLR)s [2] . .                    | 10 |
| 2.3 | Summary of selected studies on ageing using TILDA . . . . .                          | 11 |
| 3.1 | Dimensions of Raw TILDA and Harmonised Datasets (Pre Filtering)                      | 24 |
| 3.2 | PMF Derived Variable Prefixes ([3]) . . . . .                                        | 28 |
| 3.3 | Thematic grouping of longitudinal features . . . . .                                 | 30 |
| 4.1 | Input Shape for Cleaning Pipeline (Post Manual Variable Filtering)                   | 32 |
| B.1 | Initial Raw Feature Counts Categorised by Nine Scenarios (Pre<br>Cleaning) . . . . . | 44 |
| B.2 | Scenario Count Progression: Post Step 1 (Empty / Blank Handling)                     | 45 |
| B.3 | Scenario Count Progression: Post Step 2 (Sentinel Standardisation)                   | 45 |
| B.4 | Scenario Count Progression: Post Step 3 (Numeric Cleaning) . . .                     | 45 |
| B.5 | Scenario Count Progression: Post Step 4 (Censored / Ordinal Map-<br>ping) . . . . .  | 46 |
| B.6 | Scenario Count Progression: Post Step 5 (Binary Classification) .                    | 46 |
| B.7 | Final Dfs Cleaned: Post Step 6 (Multi-Class / Mixed Parsing) . .                     | 46 |

# List of Figures

|     |                                                                                                                                                                                                 |    |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| 2.1 | Publications per year. . . . .                                                                                                                                                                  | 7  |
| 2.2 | PRISMA chart for Systematic Review (SR)s showing the study selection process for the systematic mapping and integrative review [4]. . . . .                                                     | 9  |
| 3.1 | Flowchart of the manual variable filtering criteria. Placeholder counts indicate remaining variables per dataset after each step. . .                                                           | 26 |
| 4.1 | Flowchart of the final six step cleaning pipeline applied to all TILDA waves. See full transformation tables in appendix B.7 and D for detailed scenario progression code at each step. . . . . | 34 |

# List of Abbreviations

|                 |                                                        |
|-----------------|--------------------------------------------------------|
| <b>AI</b>       | Artificial Intelligence                                |
| <b>AUC</b>      | Area Under the ROC Curve                               |
| <b>AUROC</b>    | Area Under the Receiver Operating Characteristic Curve |
| <b>BMI</b>      | Body Mass Index                                        |
| <b>BP</b>       | Blood Pressure from Sphygmomanometer                   |
| <b>brainPAD</b> | Brain predicted age difference                         |
| <b>CAPI</b>     | Computer Assisted Personal Interview                   |
| <b>CES-D</b>    | Center for Epidemiologic Studies Depression Scale      |
| <b>COG</b>      | Scales and Questions on Cognition                      |
| <b>CRT</b>      | Choice Reaction Time (Cognitive Test)                  |
| <b>CV</b>       | Cross Validation                                       |
| <b>CVD</b>      | Cardiovascular Disease                                 |
| <b>DIS</b>      | Disability, Functional Impairment and Helpers          |
| <b>DM</b>       | Diabetes Mellitus                                      |
| <b>DNN</b>      | Deep Neural Network                                    |
| <b>EU</b>       | European Union                                         |
| <b>F1</b>       | F1-score (harmonic mean of precision and recall)       |
| <b>FOF</b>      | Fear of Falling                                        |
| <b>FR</b>       | Frailty, Gait, Exercise, Falls and Fractures           |
| <b>GBM</b>      | Gradient Boosting Machine                              |
| <b>GDPR</b>     | General Data Protection Regulation                     |
| <b>HADS</b>     | Hospital Anxiety and Depression Scale                  |
| <b>HGS</b>      | Hand Grip Strength                                     |

## List of Abbreviations

---

|               |                                                     |
|---------------|-----------------------------------------------------|
| <b>IADL</b>   | Instrumental Activities of Daily Living             |
| <b>INC</b>    | Income Variables                                    |
| <b>IPAQ</b>   | International Physical Activity Questionnaire       |
| <b>ISSDA</b>  | Irish Social Science Data Archive                   |
| <b>JSON</b>   | JavaScript Object Notation                          |
| <b>MD</b>     | Medication Data                                     |
| <b>MGS</b>    | Maximum Gait Speed                                  |
| <b>MH</b>     | Scales and Questions on Mental Health and Wellbeing |
| <b>ML</b>     | Machine Learning                                    |
| <b>MVPA</b>   | Moderate-to-Vigorous Physical Activity              |
| <b>NOS</b>    | Newcastle-Ottawa Scale                              |
| <b>OR</b>     | Odds Ratio                                          |
| <b>PA</b>     | Physical Activity                                   |
| <b>PMF</b>    | Pseudonymised Microdata File                        |
| <b>RAND</b>   | Research and Development Corporation                |
| <b>Recall</b> | Recall (true positive rate)                         |
| <b>RF</b>     | Random Forest                                       |
| <b>SCQ</b>    | Self Completion Questionnaire                       |
| <b>SCR</b>    | Screening Tests                                     |
| <b>SHAP</b>   | Shapley Additive Explanations                       |
| <b>SLR</b>    | Systematic Literature Review                        |
| <b>SOC</b>    | Social Variables                                    |
| <b>SPSS</b>   | Statistical Package for the Social Sciences         |
| <b>SR</b>     | Systematic Review                                   |
| <b>TILDA</b>  | The Irish Longitudinal Study on Ageing              |
| <b>TUG</b>    | Timed Up and Go (mobility test)                     |
| <b>UGS</b>    | Usual Gait Speed                                    |
| <b>WHO</b>    | World Health Organization                           |

## List of Abbreviations

---



# Chapter 1

## Introduction

Ageing populations experience substantial changes across physical, nutritional, cognitive, and psychosocial domains, each shaping vulnerability to chronic disease and functional decline [5–7]. Understanding how these multidomain factors interact over time is essential for early risk identification.

The financial and societal burden is substantial. In Europe, poor diet is a major risk factor for non communicable diseases, contributing billions in healthcare costs annually [8]. In Ireland, malnutrition alone is estimated to cost over €1.4 billion per year [9]. In response to these challenges, international public health frameworks, including the World Health Organization (WHO) *Global Action Plan* on noncommunicable diseases and Ireland’s *Healthy Ireland* framework, highlight nutrition and lifestyle factors as central components of disease prevention strategies.

European regulatory frameworks such as the General Data Protection Regulation (GDPR) and proposed European Union (EU) Artificial Intelligence (AI) Act emphasise transparency and highlight the need for interpretable Machine Learning (ML) models in healthcare.

Traditional risk prediction models have largely relied on clinical biomarkers such as Blood Pressure from Sphygmomanometer (BP) and lipid profiles. Yet, growing evidence shows that broader predictors, including nutrition [10], Physical Activity (PA) [11], Scales and Questions on Mental Health and Wellbeing (MH) [12], and Social Variables (SOC) [13] improve predictive performance. Es-

## 1. INTRODUCTION

---

timating the likelihood of developing a condition given certain risk factors helps quantify the influence of these predictors in clinical decision making.

TILDA<sup>1</sup> provides a national representative cohort of adults aged 50+ in Ireland, surveyed repeatedly across multiple domains. For cross study comparability and methodological consistency in model development, selected variables from the externally produced RAND Harmonised TILDA dataset (available for Waves 1 and 2) were included.

The harmonised dataset provides standardised variable definitions and documented construction rules, which are particularly relevant in a machine learning setting where models are trained and evaluated on partitioned data. Its inclusion supports robust feature engineering, reproducible train validation splits, and alignment with prior ageing related ML studies that adopt harmonised frameworks. The specific role of harmonised variables within the modelling pipeline is detailed in Chapter 3.

Despite these advantages, existing ML research on chronic disease prediction faces persistent limitations: over reliance on clinical predictors, limited incorporation of lifestyle and SOC variables, predominantly cross sectional study designs that fail to capture trajectories, and a lack of interpretability consistent with emerging AI governance standards.

This thesis addresses these gaps by leveraging longitudinal TILDA data across multiple domains, using interpretable ML methods to combine modifiable health behaviours, psychosocial factors, and established clinical measures to enhance prediction of ageing related outcomes.

### 1.1 Research problem and motivation

Despite increasing research and clinical interest in lifestyle, nutrition factors and advances in ML methods, approaches to chronic disease prediction in older adults remain limited in several ways.

---

<sup>1</sup>TILDA's dataset are pseudonymised and accessed under license via ISSDA. Use adheres to UL S&E ethics approval and data retention requirements.

- **Limited Integration of Multidomain Predictors:** Existing models focus primarily on clinical measurements and often neglect modifiable behavioural, dietary, and psychosocial factors [10, 14].
- **Underuse of Longitudinal Dynamics:** Few studies leverage repeated measures to capture developments of risk, such as FR progression [15]. Probabilistic reasoning can help estimate the likelihood of developing a condition at a future time given earlier measurements, for example, calculating the probability  $P(\text{FR at wave 5} \mid \text{UGS at wave 1, Nutrition at wave 2})$ .

This approach helps quantify how early indicators influence later outcomes and supports better feature selection and timing of interventions in predictive models.

- **Lack of Explainability:** Many ML models are not interpretable, limiting clinical adoption and failing to meet emerging regulatory requirements for trustworthiness AI in healthcare [16].

Addressing these challenges is essential to improve predictive accuracy, support evidence based interventions, and ensure alignment with evolving policy and regulatory priorities.

## 1.2 Research aims and objectives

The goal of this thesis is to develop and validate ML models that integrate nutrition, lifestyle, and MH features with clinical data to improve prediction of chronic disease and ageing related outcomes in a representative cohort of older adults. This goal will be achieved through the following objectives:

- Review existing applications in ML for chronic disease prediction in ageing populations, with emphasis on gaps in lifestyle and nutrition integration.
- Develop a reproducible pipeline to preprocess and align TILDA waves 1–5, and engineer multidomain features (nutrition, activity, mobility, MH, clinical indicators).

## 1. INTRODUCTION

---

- Develop and compare baseline statistical models (e.g., logistic regression) with advanced interpretable ML methods such as Random Forest (RF) and Gradient Boosting Machine (GBM).
- Evaluate models using predictive classification performance metrics including Area Under the ROC Curve (AUC), calibration and error measures (accuracy, precision, Recall (true positive rate) (Recall), F1-score (harmonic mean of precision and recall) (F1)), perform ablation analyses to assess the incremental value of lifestyle and nutrition predictors.
- Identify actionable predictors (e.g., vitamin D status, UGS reserve) and highlight modifiable risk factors for intervention.
- Document ethical, governance, and reproducibility practices for handling longitudinal pseudonymised health data.

### 1.3 Contributions of the research

This research makes contributions at three levels:

- **Empirical:** Demonstrates how behavioural, dietary, and other MH features complement established clinical measures to enhance predictive performance.
- **Methodological:** Provides a reproducible pipeline for aligning longitudinal TILDA data across domains and integrating diverse features into ML workflows.
- **Clinical:** Highlights actionable modifiable factors alongside traditional clinical indicators for targeted interventions and policy.

### 1.4 Thesis Outline

In *Chapter 2* a literature review on ML prediction of chronic disease in ageing populations, with emphasis on lifestyle, nutrition predictors and methodological

considerations, is presented. *Chapter 3* discusses the TILDA study design, data preprocessing, alignment, and feature engineering. In *Chapter 4* the modelling framework is outlined. This includes baseline and advanced ML, hyperparameter tuning, validation, and evaluation metrics. *Chapter 5* shows the model result, including model comparisons, assessments of feature importance, and an ablation analysis. In *Chapter 6* the implications, limitations, and ethical considerations are discussed, and future directions for the research are proposed. Additional supporting documents are included in appendix A.

# Chapter 2

## Literature Review

This chapter reviews literature on ageing, chronic disease, and predictive modelling using TILDA (introduced in Chapter 1). It focuses on three interrelated domains central to later life health: FR, physical function, MH, and nutrition within the context of biological ageing. This review focuses on FR, MH, and nutrition as key determinants of later life outcomes. In line with the WHO healthy ageing framework, research using TILDA highlights FR, MH, and nutrition as interconnected determinants of later life outcomes. The following subsections examine each domain in turn.


### 2.1 Methodology

Several sources describe how systematic and integrative reviews are commonly carried out in fields such as software engineering, health, and education. The approach followed key principles for systematic mapping, for example, defining research questions, identifying relevant studies through structured database searches, applying inclusion and exclusion criteria, and categorising results as outlined in [1]. The integrative literature review [17] helped structure and connect findings across studies, while [18, 19] guided the organisation of ideas. In related methodological work, [2] clarified how SRs can identify research gaps, and [20] showed how mapping and synthesis highlight trends and future directions. This combined guidance informed a structured yet flexible methodology suitable for ageing in AI, and health research.

### 2.1.1 Search strategy and database screening

The main topic of interest was chronic disease prediction using nutrition, lifestyle, and clinical data from TILDA. Relevant databases (e.g., ScienceDirect, PubMed) were searched using combinations of keywords such as “Irish Longitudinal Study on Ageing”, “machine learning,” “chronic disease”, “nutrition”, “diet”, and “physical activity” (see table 2.1).

The search covered studies published from 2011 to 2025. Figure 2.1 summarises the number of studies identified per year, highlighting trends and gaps over time.

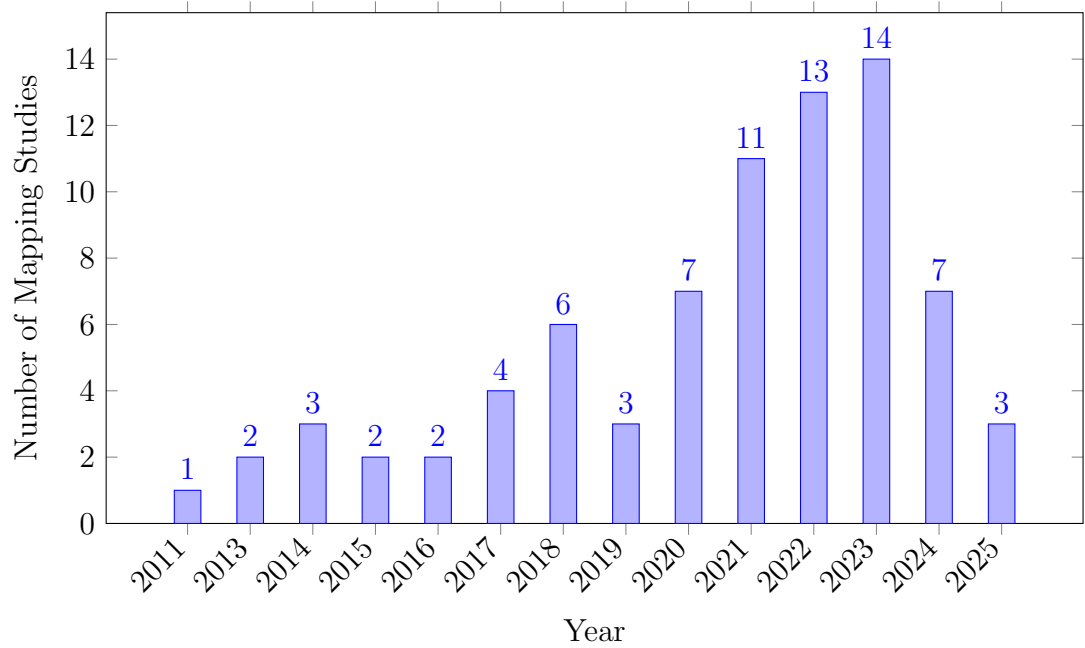

**Figure 2.1:** Publications per year.

Some search strings returned few or irrelevant results, particularly for ML related TILDA studies, highlighting a key research gap. Iterations continued until suitable combinations consistently returned relevant studies. Duplicates were removed using Zotero’s reference management feature. The remaining studies were individually and manually checked for relevance to “ageing,” “chronic disease,” and ML. Using Zotero’s notes functionality, the initially created table 2.3 captured key elements for each paper, including model type, features used, and

## 2. LITERATURE REVIEW


---

**Table 2.1:** Database searches and number of studies per database 2.3 [1].

| Database        | Search                                                                                                                                                                                | Results |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Oxford Academic | (TILDA OR Irish Longitudinal Study on Ageing)AND<br>(chronic disease OR diabetes OR cardiovascular) AND (nu-<br>trition OR diet OR “physical activity”)                               | 1081    |
|                 | (TILDA OR “Irish Longitudinal Study on Ageing”) AND<br>(“machine learning” OR “predictive model” OR “risk pre-<br>diction”)                                                           | 71      |
| IEEE Xplore     | TILDA OR “Irish Longitudinal Study on Ageing”                                                                                                                                         | 56      |
|                 | (TILDA OR ”Irish Longitudinal Study on Ageing”) AND<br>(“machine learning” OR “predictive model” OR “risk pre-<br>diction”)                                                           | 7       |
| ScienceDirect   | (TILDA OR “Irish Longitudinal Study on Ageing”) AND<br>(“chronic disease” OR cardiovascular OR diabetes) AND<br>(nutrition OR diet OR lifestyle OR “physical activity”)               | 257     |
|                 | (TILDA OR “Irish Longitudinal Study on Ageing”) AND<br>(“machine learning” OR “predictive model”) AND ( “chronic<br>disease” OR diabetes) AND (nutrition OR “physical activ-<br>ity”) | 20      |
| PubMed          | (TILDA OR “Irish Longitudinal Study on Ageing”) AND<br>(“chronic disease” OR cardiovascular OR diabetes) AND<br>(nutrition OR diet OR lifestyle OR “physical activity”)               | 27      |
|                 | (TILDA OR “Irish Longitudinal Study on Ageing”) AND<br>(“machine learning” OR “predictive model” OR “risk pre-<br>diction”)                                                           | 9       |



main findings for each paper in the collection, as illustrated in the PRISMA flow diagram (Figure 2.2).

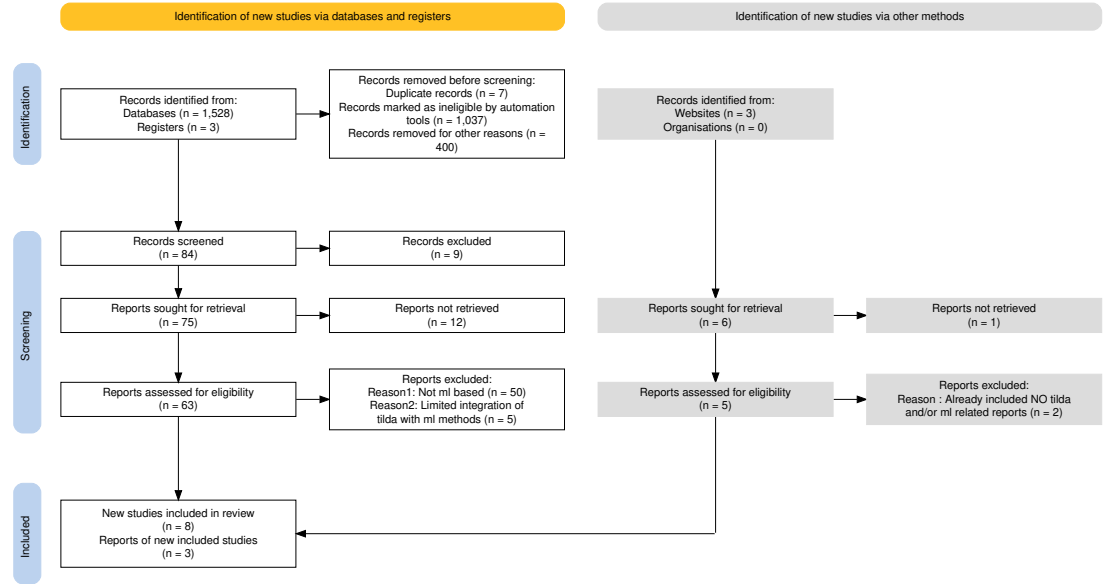

**Figure 2.2:** PRISMA chart for SRs showing the study selection process for the systematic mapping and integrative review [4].

### 2.1.2 Quality and relevance evaluation

To systematically assess the quality of the included studies, a customisable version Newcastle-Ottawa Scale (NOS) was applied; see table 2.2. The NOS evaluation studies across three domains: *Selection* (S1–S4), *Comparability* (C1–C2), and *Outcome* (O1–O3). *Selection* criteria assess the representativeness of the sample, clarity of exposure measurement, and temporal alignment of outcomes. *Comparability* examines the control of key confounders (variables that may influence both the predictor and outcome), while *outcome* evaluates measurement validity, follow up adequacy, and completeness. Each domain is scored 0–1, recall the Bernoulli random variable (0 = criterion not met, 1 = criterion met), and the total score reflects the overall study quality.

This initial table guided a further refinement of the results into two sub tables: (1) studies critically related to TILDA, (2) studies using TILDA data ML for

## 2. LITERATURE REVIEW

predictive contexts, which revealed minimal to no integration with TILDA.

**Table 2.2:** Quality evaluation of SLRs [2]

| Reference                  | S1 | S2 | S3 | S4 | C1 | C2 | O1 | O2 | O3 | Total |
|----------------------------|----|----|----|----|----|----|----|----|----|-------|
| (Xu, 2023 [21])            | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 9     |
| (Donoghue, 2023 [16])      | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 8     |
| (Moguilner, 2021 [15])     | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 1  | 8     |
| (Davis, 2021 [5])          | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 1  | 0  | 7     |
| (Boyle, 2021 [22])         | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 0  | 1  | 7     |
| (Tzemah-Shahar, 2022 [23]) | 1  | 1  | 1  | 0  | 1  | 0  | 1  | 1  | 1  | 7     |
| (A. Shirsath, 2024 [24])   | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 8     |
| (Romero-Ortuno, 2021 [25]) | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 9     |
| (Bardon, 2020 [26])        | 1  | 1  | 1  | 0  | 1  | 0  | 1  | 1  | 1  | 7     |
| (Zhang, 2025 [27])         | 1  | 1  | 1  | 1  | 1  | 1  | 1  | 0  | 1  | 8     |
| (Sutin, 2023 [28])         | 1  | 1  | 1  | 1  | 0  | 0  | 1  | 1  | 1  | 7     |

Table 2.3 summarises selected studies on ageing using TILDA and ML, reflecting key gaps and opportunities identified during systematic mapping. These steps were aligned with the research matrix created at the beginning, ensuring that the refinement of studies and synthesis of findings stayed closely tied to the original research goals.

### 2.1.3 Synthesis and Integration

Using the NOS scores, each study was annotated in Zotero with details on dataset, key variables, analytical approach, and main findings, facilitating a consistent and systematic evaluation across studies. For the systematic component, data was systematically extracted and synthesised to identify trends (e.g., Markov models, logistic regression, 5-fold Cross Validation (CV)) and research gaps [2], complemented by DoctoralWriting resources [29, 30], which clarified how to define research questions and develop logical arguments.

The integration of a research matrix with systematic mapping and integrative synthesis ensured that the methodology was well suited to capturing the complexity of ageing, nutrition, chronic disease risk and predictive modelling studies focused primarily on TILDA based studies, but due to the limited number of ML

## 2.1 Methodology

**Table 2.3:** Summary of selected studies on ageing using TILDA

| Theme                 | Author/year               | Dataset                    | Variables/features                                                                                                                          | Methods/model type                                                                                                  | Key Findings/outcome                                                                                              | Limitations                                                                                                                                                                                               |
|-----------------------|---------------------------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FR                    | Romero-Ortuno (2021) [25] | Wave 1–5                   | FR state, FR phenotype (FP) components (Exhaustion(EX), Unexplained weight loss(WL), Weakness(WK), Slowness(SL), Low physical activity(LA)) | Multi state Markov model, longitudinal 8 year follow up                                                             | 32% of pre frail to non frail; FR strongly predicted 31% mortality                                                | Self report bias; observational design                                                                                                                                                                    |
| Falls + ML            | Donoghue (2023) [16]      | Wave 1–3                   | Gait, mobility, medications, history of falls                                                                                               | Conditional inference forest; 5-fold CV; undersampling for imbalance                                                | Accuracy up to 69.7%; for adults aged 50–64.                                                                      | Area Under the Receiver Operating Characteristic Curve (AUROC) values were $\leq 0.69$ and PRAUC $\leq 0.39$ indicating low predictive accuracy; no external validation; cross sectional; Class imbalance |
| Fear of Falling (FOF) | Zarudsky (2014) [31]      | Wave 1                     | Age, sex, fall history                                                                                                                      | Cross sectional prevalence analysis                                                                                 | 23.3% prevalence; higher in women; 70% with FOF had no recent falls in the last 12 months                         | Self reported; cross sectional                                                                                                                                                                            |
| Functional Mobility   | Huang (2019) [32]         | Wave 1–2                   | Measured by Timed Up and Go (mobility test) (TUG), Hand Grip Strength (HGS), physical activity, vision, Body Mass Index (BMI), age          | Linear regression, stratified analyses                                                                              | Age modifies effects; PA and grip protect mobility; vision benefit only in middle aged (Beta = -0.032, P = 0.002) | Observational; 2 year follow up                                                                                                                                                                           |
| Depression            | Jacob (2023) [33]         | Wave 1–2                   | Falls, FOF, HADS-A, Center for Epidemiologic Studies Depression Scale (CES-D)                                                               | Prospective logistic regression                                                                                     | Falls predicted incident anxiety Odds Ratio (OR)=1.58 and depression OR=1.43                                      | Self reported falls; short follow up; mediation effect partially explored                                                                                                                                 |
|                       | Laird (2023) [14]         | Wave 1–5                   | Moderate-to-Vigorous Physical Activity (MVPA), walking, sociodemographics                                                                   | Longitudinal regression; mixed model                                                                                | Higher physical activity reduced depressive symptoms; dose response effect                                        | Self reported PA; observational; limited causal inference                                                                                                                                                 |
| Nutrition             | Murphy (2023) [10]        | Wave 1–5                   | Plasma lutein, zeaxanthin                                                                                                                   | Linear/ordinal logistic regression                                                                                  | Higher carotenoids predicted slower FR progression Lower odds of becoming frail (ORs = 0.57–0.89)                 | Observational; not predictive of longitudinal muscle changes                                                                                                                                              |
|                       | Bardon (2020) [26]        | Wave 1–2                   | Hospitalisation, functional status, SOC support, sex, falls                                                                                 | Logistic regression; sex stratified analyses                                                                        | Functional decline, hospitalisation, poor support increased malnutrition risk; sex differences                    | Observational(short follow up (2 years)); limited generalisability ;65 years, self reported                                                                                                               |
| ML                    | Xu (2023) [21]            | Wave 1–3                   | 105 predictors from 40,000+ variables (SOC, clinical, mental, family)                                                                       | Stacked ensemble: RF, XRT, GLM, GBM, Deep Neural Network (DNN); Shapley Additive Explanations (SHAP) explainability | AUC=0.854 for 2 year DM prediction; top predictors LDL, cirrhosis, sex                                            | No external validation; short follow up; ensemble complexity limits deployment                                                                                                                            |
|                       | Davis (2021) [5]          | Wave 3                     | Age, HGS, chair stands, BMI, cognitive tests                                                                                                | Histogram gradient boosting regression; SHAP                                                                        | $r^2$ test: UGS $\approx$ 0.41, Maximum Gait Speed (MGS) $\approx$ 0.46, GSR $\approx$ 0.21                       | Modest predictive power; cross sectional; no external validation                                                                                                                                          |
|                       | Zhang (2025) [27]         | Longitudinal IMAGEN cohort | Psychopathology, personality, cognition, substance use, environment                                                                         | Regularised logistic regression; diagnostic                                                                         | Longitudinal AUC: ED=0.71, MDD=0.64, AUD=0.67; shared transdiagnostic predictors                                  | Limited age range; no external replication                                                                                                                                                                |
|                       | Boyle (2021) [22]         | Wave 3                     | Brain predicted age difference (brainPAD); processing speed; attention; cognitive flexibility; verbal fluency                               | Linear regression, correlation analyses                                                                             | Higher brainPAD associated with lower cognitive performance across multiple domains                               | Cross sectional; no causal inference; limited sample                                                                                                                                                      |

## 2. LITERATURE REVIEW

---

applications within TILDA, additional studies on older adult populations and chronic disease were included.

### 2.2 Frailty and physical function

FR reflects declining physiological reserve, providing a framework for understanding physical vulnerability in ageing. In TILDA, it is captured through both the FR phenotype and the FR index, with UGS, HGS, and mobility decline serving as practical predictors. These measures strongly predict hospitalisation and mortality.

#### 2.2.1 Probabilistic interpretation of frailty

One can argue that from a probabilistic perspective, the chance of an adverse outcome (such as mortality,  $Y$ ) given observed features (such as FR markers,  $X$ ) is a conditional probability  $P(Y | X)$ . This allows us to deduce which FR features are most predictive of adverse outcomes. Features may be independent, dependent, or mutually exclusive.

The presence or absence of metabolic syndrome represents a mutually exclusive event that can inform risk models.

$$P(X_i \cap X_j) = P(X_i)P(X_j)$$

for independent features  $X_i$  and  $X_j$ , guiding feature selection and reducing redundancy in model inputs. This reflects the likelihood that an individual with certain FR characteristics will experience a particular outcome.

Evidence suggests that FR is dynamic, not irreversible. For example, multi state modelling showed that many prefrail adults transition back to non frail, although established FR strongly predicts mortality [25]. Metabolic syndrome accelerates the development of FR, suggesting a metabolic pathway of vulnerability [34]. The presence of metabolic syndrome modifies the conditional probability  $P(\text{FR} | \text{Metabolic Syndrome})$  and may increase the likelihood of adverse outcomes over time. Another detail is that age matters: obesity predicts mobility decline earlier in life, whereas later in life, traits that protect against this, including HGS, become more significant [32].

These findings partly conflict: FR appears both reversible and progressive, depending on risk context. This complexity highlights the need for probabilistic models that can update beliefs about risk as new features are observed, as formalised by Bayes theorem:

$$P(Y | X) = \frac{P(X | Y)P(Y)}{P(X)}$$

where  $P(Y | X)$  is the posterior probability of outcome  $Y$  given features  $X$ .

### 2.2.2 Bayesian updating of frailty risk

Causal inference is limited by observational designs, and predictors are frequently examined separately, ignoring interactions. Most FR models have only been with the TILDA dataset, and with this study that focuses on the same TILDA but uses both longitudinal TILDA waves and harmonised variables to improve cross study comparability, enabling for a more robust training validation splits in ML models, and explores richer predictive patterns over time. These gaps point to the need for multidimensional approaches. Traditional regression models may not fully capture age dependent interactions, suggesting a role for more flexible methods such as machine learning techniques and models.

## 2.3 Mental health in older adults

MH, including depression, anxiety, loneliness, and SOC isolation, strongly shapes quality of life. Evidence from TILDA shows strong links to both physical and SOC factors. [35] found that participation in physical, SOC, and cognitive activities summarised by the Act-Belong-Commit (ABC) indicator was associated with lower depression and anxiety. This suggests SOC integration and lifestyle protect mental wellbeing. However, [36] reported that self reported measures may exaggerate such associations..., raising concerns of bias. These two findings conflict: the effect of SOC engagement is strong when self reported and weaker when objectively assessed.

Objective data strengthen the case for activity. Accelerometer based measures show a dose response link between moderate to vigorous activity and lower

## 2. LITERATURE REVIEW

---

depressive symptoms [11]. Yet reverse pathways are also evident: incident falls and functional decline predict later depression, refereed by FOF [33]. Together, these results reveal a bidirectional relationship, MH both influences and is influenced by physical decline. Most studies rely on broad self report scales, such as CES-D or Hospital Anxiety and Depression Scale (HADS), with little biomarker or clinical validation.

This literature suggests MH in ageing cannot be modelled as a one way effect. It requires longitudinal, multidimensional approaches that can capture mutual pathways, an area where machine learning is well suited, especially when combined with probabilistic models that estimate the likelihood and posterior probability of MH outcomes given multiple interacting features.

For example, we can estimate:

$$P(\text{Depression} \mid \text{Activity, Falls, SOC Engagement}),$$

quantifying how these interacting features together influence MH outcomes. Probabilistic modelling helps determine which features have the strongest effect and which may be redundant for predictive purposes.

### 2.4 Nutrition and biological ageing

Nutrition interacts with both biological and psychosocial systems, shaping ageing trajectories and FR. Biomarkers like vitamin D, lutein, and zeaxanthin have been linked to physical and cognitive outcomes in TILDA. [10] showed that higher plasma lutein and zeaxanthin dietary carotenoids found in leafy vegetables were linked to slower FR progression. By contrast, [37] found vitamin D deficiency predicted DM, musculoskeletal decline, especially among adults with low sunlight exposure. These studies point to different nutritional mechanisms: antioxidant protection versus metabolic regulation.

### 2.4.1 Bayesian perspective on nutritional biomarkers

The effect of nutrition on ageing outcomes can be formalised probabilistically using Bayes theorem:

$$P(\text{Outcome} \mid \text{Nutritional Status}) = \frac{P(\text{Nutritional Status} \mid \text{Outcome})P(\text{Outcome})}{P(\text{Nutritional Status})},$$

where the likelihood function  $P(\text{Nutritional Status} \mid \text{Outcome})$  quantifies how observed nutritional biomarkers relate to health states, and the posterior  $P(\text{Outcome} \mid \text{Nutritional Status})$  captures updated beliefs about outcomes, including uncertainty in small sample studies. This helps identify which biomarkers are most informative for predicting ageing outcomes which supports feature selection in ML models.

### 2.4.2 Contextual and integrative considerations

Malnutrition also reflects SOC and functional risks. [26] found that hospitalisation, functional loss, and poor SOC support increased malnutrition risk, with notable sex differences. This highlights a limitation in much nutritional research: biological markers are studied without integrating SOC context.

The difference between biological and chronological age is a major point of debate. Biomarker based metrics that better capture these cumulative exposures, like FR indices or epigenetic clocks, frequently vary from chronological age. McCarthy and Azizi link metabolic syndrome and nutritional deficits to accelerated biological ageing [38, 39]. Although the majority of the evidence is cross sectional and has little ability to capture changes over time, these indicators offer a more precise prediction of vulnerability. Reliability is also decreased in biomarker research with small sample sizes, which can be formalised through the likelihood function  $P(\text{Data} \mid \theta)$  and its impact on posterior uncertainty in Bayesian inference.

Taken together, nutrition interacts with biological, metabolic, and SOC systems. Isolating single nutrients risks oversimplification. Integrative modelling that combines biomarkers, clinical factors, and SOC determinants supported by machine learning pipelines offers a more promising route. Models that estimate

## 2. LITERATURE REVIEW

---

the joint distribution of features and outcomes can better capture the complex dependencies relevant to biological ageing.

### 2.5 Machine Learning in ageing and chronic disease

ML is increasingly applied in ageing research because it can capture non linear and multidimensional relationships that traditional regression models, such as logistic regression, often miss [21, 22].

#### 2.5.1 Feature sets in ML studies

Studies using ML in ageing research include many types of predictors: clinical measures, sociodemographic factors, lifestyle habits, cognitive tests, and psychosocial variables. A recurring pattern, however, is that models often underline easily measured physical health data, such as comorbidity counts, mobility scores, or vital signs, while more complex but important predictors, including nutrition and SOC factors, are underrepresented [31]. This imbalance may limit the ability of models to capture the full complexity of chronic disease risk with ageing, especially considering that MH and nutrition exert independent and interacting effects on later life outcomes (here). Models that focus only on ready available clinical data risk reproducing the same biases seen in traditional regression approaches.

#### 2.5.2 ML models used

The methodological approaches used in ageing research span both traditional and advanced models. Logistic regression and Markov models remain common baselines due to their interpretability and simplicity, yet they are often unable to capture non linearities or higher order interactions. More recent work has shifted towards ensemble methods such as RF, gradient boosting machines GBM, as well as DNNs, which generally achieve higher predictive accuracy.

Similarly, [40] evaluated mortality prediction using a standard logistic regression model with demographic, clinical, and functional predictors, achieving an



AUC of 0.78, whereas ensemble methods in [21] reached 0.854 for DM prediction, showing how flexible, non linear models can better capture complex interactions among ageing related predictors.

### 2.5.3 Performance and Validation

Predictive performance across studies is generally moderate to strong, with AUC values between 0.70 and 0.90 for outcomes like DM, UGS, depression, and mortality. This indicates that models can distinguish reasonably well between individuals who will or will not experience an outcome.

However, there are important limitations. Many studies rely only on internal validation, testing models on the same data used for training. This can inflate performance estimates and reduce confidence in applying the model to new populations. To add, most studies are cross sectional, so causal or temporal effects cannot be assessed. When combined with the underuse of nutrition and SOC predictors, these issues indicate that current models may not fully represent the multidimensional nature of ageing and could produce context specific results rather than generalisable predictions [31].

### 2.5.4 Explainability in ML for ageing

As ML models become more complex, interpretability emerges as a critical challenge. Explainability tools like SHAP can highlight feature importance, but their use is inconsistent, particularly in deep learning models [5, 21, 41]. These methods improve transparency and can highlight unexpected drivers of outcomes, such as psychosocial variables being stronger predictors than biomedical ones, yet black box concerns remain, especially for deep learning models, where feature interactions are difficult to track. For ageing research, where clinical adoption requires both accuracy and trust, explainability is not optional but essential. Current efforts show promise but remain fragmented, with no consensus on best practice. This gap links directly to the broader methodological limits discussed in the next section on gaps in the literature.

### 2.6 Gaps in the Literature

First, most studies rely on TILDA or similar cohorts of Irish and predominantly older adults (50+). This limits confidence in how well results transfer to other populations. This thesis focuses on TILDA studying ageing in depth but also makes use of the harmonised dataset, which links TILDA with comparable UK and US cohorts. This helps place findings in a broader international context while retaining a core emphasis on older adults.

Second, there is an over reliance on physical health predictors such as comorbidity counts and mobility measures, while nutrition, SOC, religious or spiritual, and environmental variables are often overlooked. As shown in [10], nutritional biomarkers like lutein and zeaxanthin are strong predictors of FR, yet these are rarely integrated into broader ML pipelines. By contrast, studies such as [26] highlight the role of SOC support and functional decline in malnutrition risk. Together, these examples show that excluding nutrition and SOC factors risks producing models that reinforce the same biomedical biases seen in regression heavy work. From a Bayesian viewpoint, the omission of key features reduces the explanatory power of the model and weakens the posterior probability  $P(\text{Outcome} \mid \text{All Features})$  compared to  $P(\text{Outcome} \mid \text{Limited Features})$ . Including a richer set of features increases the likelihood that the model accurately reflects the true data generating process.

Third, methodological choices remain conservative. Regression models remain dominant, likely due to their interpretability and ease of implementation. However, they often fail to capture non linear interactions and higher order dependencies present in ageing related data. Comparisons with more advanced approaches such as DNNs or transformers are rarely explored. For instance, [40] achieved an AUC of 0.78 using logistic regression for mortality prediction in TILDA, whereas [21] reported an AUC of 0.854 with ensemble methods for DM incidence. This contrast illustrates that more flexible ML models can provide superior predictive performance while maintaining interpretability when combined with explainability techniques. Where else ensembles or brainPAD approaches have been attempted, validation is almost always internal, with little cross cohort testing. Weak validation and limited feature sets reduce the generalisability of the

estimated conditional probabilities and increase the risk of overfitting. Maximum likelihood estimation and Bayesian inference can provide a formal framework for assessing model fit and updating predictions as more diverse and representative data become available.

Fourth, many outcomes relevant to older adults such as pain, sleep quality, and subjective wellbeing remain underexplored. For example, [10] focused on plasma biomarkers for FR without assessing sleep or pain, and UGS models such as [5] similarly omit subjective quality of life. Omitting these outcomes limits the real world application of predictive models. Including broader outcomes in ML pipelines can better capture holistic ageing trajectories and improve interpretability for interventions targeting older adults.

Fifth, cross sectional bias and data handling weaken reliability. Much nutritional work, such as [10], relies on single time point biomarker data, which cannot capture longitudinal change. By contrast, studies applying multi wave TILDA data [25] demonstrate the added value of modelling temporal dynamics. Similarly, missing data are often handled through listwise deletion, as in [40], which risks biasing results toward healthier participants, whereas more robust imputation approaches remain underused. Missing or poorly handled data can distort the likelihood function and hence the posterior predictions, reducing confidence in the model’s outputs.

Finally, interpretability challenges persist. While tools like SHAP have been applied to highlight feature importance [21, 41], their use is inconsistent, and consensus on best practice has yet to emerge. Without transparent explanations, even accurate models may face barriers to clinical acceptance. Taken together, these examples show that ageing research continues to rely on narrow predictors, conservative models, and weak validation. Addressing these gaps requires integrative, diverse, and transparent approaches that link multidimensional predictors with explainable ML.

## 2.7 Chapter Summary

This chapter reviewed evidence on ageing and chronic disease across three domains, FR, physical function, MH, nutrition, and biological ageing. We also

## 2. LITERATURE REVIEW

---

examined how machine learning has been applied to predict later life outcomes. The findings showed that while FR is partly reversible, it remains strongly tied to mortality, that MH both shapes and is shaped by physical decline, and that nutrition interacts with biological, metabolic, and SOC systems in ways that are often underestimated.

While machine learning has improved prediction accuracy in ageing research, challenges remain in integrating diverse predictors and ensuring interpretability and longitudinal validation.

Addressing these challenges requires the integrative, longitudinal, and transparent approaches that combine diverse predictors. These gaps motivated the feature engineering and modelling strategies implemented in Chapters 3 and 4, including the use of harmonised variables to ensure reproducibility and generalisability, for ML modelling.

# Chapter 3

## Technical Approach

### 3.1 Study Design

TILDA provides longitudinal data across five waves for community dwelling adults in Ireland. This thesis uses data from five core TILDA waves (Waves 1–5). For contextual comparison and benchmarking against international cohorts (see chapter 1), an additional external resource, the harmonised TILDA dataset, was also inspected and prepared. The harmonised dataset, which has been pre aligned to international standards such as the Gateway to Global Ageing Data (G2G), contains a subset of variables mapped to a common cross study format and thus differs from the raw TILDA files. Although the harmonised dataset had already been aligned to a common international standard and was simpler to process, it was still subjected to the thesis’s variable filtering and numerical standardisation steps to ensure compatibility with the five wave cleaned datasets prior to modelling.

### 3.2 Cohort Definition

All participants who provided data in at least one TILDA wave were considered eligible. To maximise the available sample for machine learning, no exclusions were applied on the basis of age, medical conditions, mobility, cognitive status, or health centre attendance.

### 3. TECHNICAL APPROACH

---

Participants were removed only when, after the combined manual filtering and automated preprocessing pipeline, they had no remaining usable variables. Filtering, therefore, occurred primarily at the *variable level*, with features removed for extreme missingness, lack of variation, or non informative structure (see chapter 4). This approach preserves the largest possible sample while ensuring all retained inputs are analytically meaningful.

#### 3.2.1 Cohort inclusion criteria

- **Participant inclusion:** All respondents who contributed data in at least one wave were included in the initial sample.
- **Usable data requirement:** Participants were excluded only when, after manual filtering and preprocessing, no usable variables remained.
- **Longitudinal retention:** Individuals were retained regardless of how many waves they contributed to, enabling initial maximum dataset utilisation.
- **No clinical exclusions:** No participant was removed due to medical diagnoses, cognitive scores, functional limitations, or non attendance at the health centre assessment.

This approach prioritises data integrity and sample size for machine learning applications rather than clinical eligibility criteria common in classical epidemiological analyses.

### 3.3 Data Collection

Data used in this thesis were collected across five waves:

- **Wave 1:** 2009–2011
- **Wave 2:** 2012–2013
- **Wave 3:** 2014–2015

- **Wave 4:** 2016
- **Wave 5:** 2018–2019
- **Harmonised:** 2016 (release)

All TILDA data were pseudonymised prior to release, meaning that personal identifiers such as names and addresses were removed or replaced with unique codes to protect participant confidentiality. Each participant received a unique identifier ('id'), along with household and cluster identifiers ('household', 'cluster'), allowing longitudinal linkage across waves without revealing individual identities.

Pseudonymisation ensures that analyses comply with data protection standards while retaining the structural and analytical integrity of the dataset. From a data cleaning and machine learning perspective, pseudonymised identifiers enable accurate merging of data across waves, preserve the longitudinal design, and support reproducible preprocessing and feature engineering. While these identifiers cannot be used for analyses of personal demographics like names or addresses, this limitation does not affect the modelling of health outcomes, lifestyle factors, or other variables of interest.

Each wave included three primary components:

1. **Computer Assisted Personal Interview (CAPI):** Home based, computer assisted personal interviews covering health, socio demographics, and family.
2. **Self Completion Questionnaire (SCQ):** Paper based self completion questionnaires capturing sensitive information on mental health, lifestyle, and wellbeing.
3. **Health Assessment:** Clinical and biomarker measurements conducted in dedicated centres or at home (Wave 1 and Wave 3).

### 3. TECHNICAL APPROACH

---

#### 3.3.1 Data Overview

Before processing, raw TILDA datasets were manually inspected, and clear noninformative variables (e.g., administrative identifiers, constant columns, high missingness) were removed. Table 3.1 shows the raw dimensions of each dataset.

**Table 3.1:** Dimensions of Raw TILDA and Harmonised Datasets (Pre Filtering)

| Dataset    | Participants (N) | Raw Variables (N) |
|------------|------------------|-------------------|
| Wave 1     | 8501             | 1619              |
| Wave 2     | 7206             | 724               |
| Wave 3     | 6397             | 1029              |
| Wave 4     | 5713             | 990               |
| Wave 5     | 4978             | 983               |
| Harmonised | 8501             | 572               |

#### 3.3.2 Variable filtering criteria

Manual filtering used a rule of thumb prior to automated cleaning:

- **Missingness:** Drop variables with >80% missing values. This threshold balances retaining sufficient feature coverage with ensuring statistical reliability. Variables exceeding this threshold provide limited information in most cases, increase imputation uncertainty, and reduce effective sample size, which is particularly critical in longitudinal machine learning analyses.
- **Unique values:** Drop variables with a single observed value, as they contain no discriminative information and cannot contribute to modelling or inference. Variables with low cardinality (2–4 unique values) were retained for review, as they frequently represent meaningful categorical responses (e.g., binary indicators or ordinal scales) relevant to ageing outcomes.
- **Dominant category:** Flag variables where a single category occurs with extremely high frequency (e.g., >90%), as such dominance may reduce variability and analytical usefulness.



- **Identifiers / administrative fields:** IDs, version tags, and sampling weights were identified using the Pseudonymised Microdata File (PMF) metadata. Variable names and descriptions were exported from each wave’s PMF file into CSV files (code provided in appendix A ) to systematically document and review features prior to filtering. These exports enabled structured manual inspection and traceability between raw PMF metadata and downstream feature selection decisions.

These manual checks produced a reduced variable set, subsequently processed using the automated nine scenario cleaning pipeline described in (chapter 4).

#### 3.3.3 Variable filtering flowchart


As part of this workflow, PMF metadata exports were first reviewed in spreadsheet form, where variables deemed non informative were visually flagged (e.g., marked in red). Candidate variables retained after manual review (described in subsection 3.3.2) were consolidated using a spreadsheet formula (e.g., `=TEXTJOIN(", ", TRUE, J2:Jn)`), which concatenated all non excluded variable names into a comma separated list. Here,  $n$  is the final row index of retained variables, with J2 corresponding to the first data row below the column header. These lists were manually transferred into wave specific JavaScript Object Notation (JSON) files, which were subsequently used by the Python pipeline to selectively load and filter only the retained variables from the original Statistical Package for the Social Sciences (SPSS) (`.sav`) and Stata (`.dta`) data files. This procedure ensured a reproducible and traceable workflow from manual selection to automated preprocessing, as illustrated in the flowchart (figure 3.1).

### 3.4 Thematic Grouping

After manual filtering, retained variables were organised into six thematic domains aligned with ageing literature and study objectives. The grouping process followed the standard PMF naming conventions (table 3.2). Specifically, each

### 3. TECHNICAL APPROACH

---

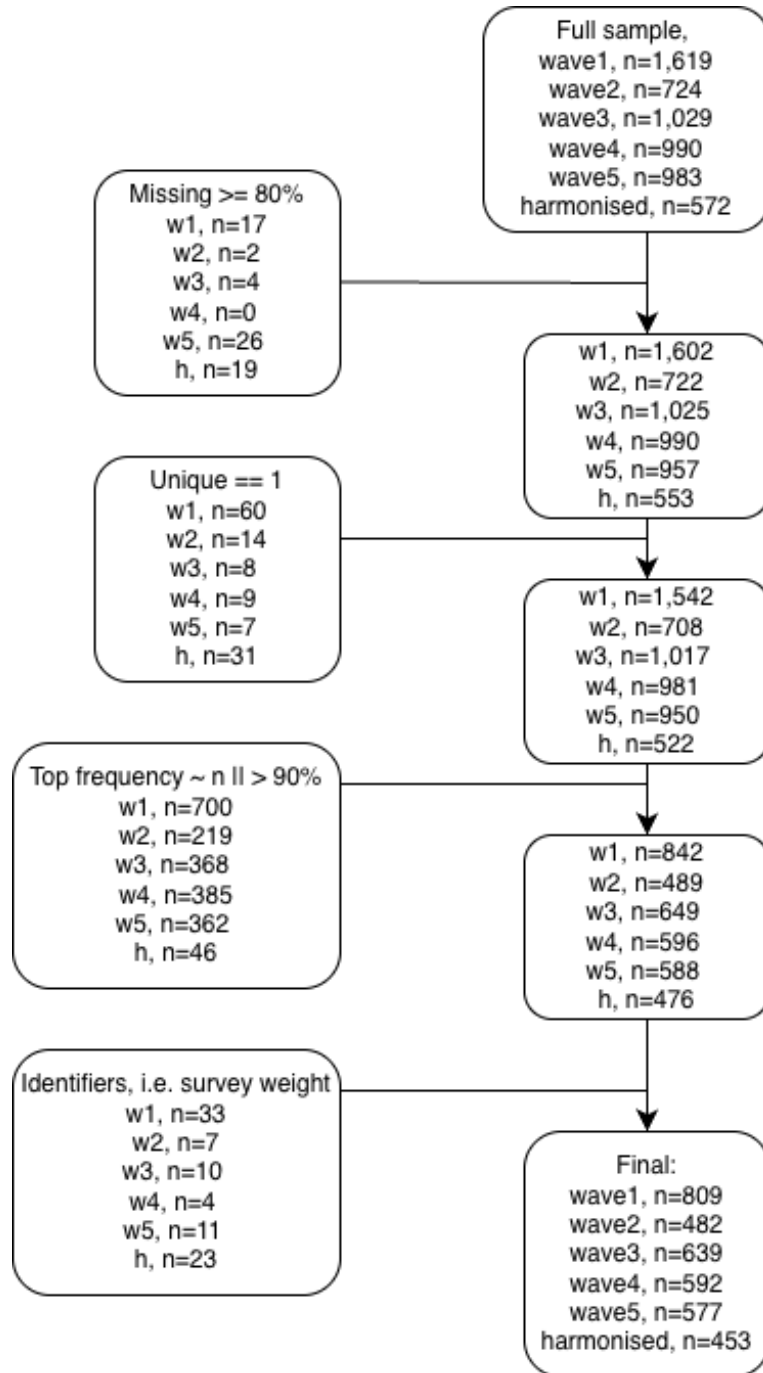

**Figure 3.1:** Flowchart of the manual variable filtering criteria. Placeholder counts indicate remaining variables per dataset after each step.

variable’s prefix indicated its data source or domain, which allowed to systematically assign variables to one of six thematic domains. This ensured that features included in each domain were conceptually coherent and analytically meaningful.

#### 3.4.1 Derived variable prefixes

To systematically process TILDA variables, each variable was assigned a prefix indicating its data source or research domain. Variables collected through the home based CAPI follow a two letter module code plus a three digit question code format (e.g., `ph121`). For questions with multiple responses or loops across participants or objects, an underscore and number indicates the specific response or loop iteration (e.g., `ph201_05`).

Variables from the self completion questionnaire (SCQ) are prefixed with ‘SCQ’. Derived variables, constructed from either CAPI or SCQ data, use an uppercase code corresponding to the research area (table 3.2). These prefixes provide a consistent framework for categorising variables and guided the systematic assignment of features into thematic domains for downstream analysis.

#### 3.4.2 Feature groups

Using the PMF prefixes as a guide, variables were systematically mapped to six thematic groups (table 3.3). Each thematic group captures a conceptually coherent domain, reflecting physical, cognitive, social, and behavioural aspects of ageing. This categorisation served two key purposes in the thesis:

1. It structured the data for the automated nine scenario cleaning engine (chapter 4), ensuring consistent application of filtering rules and facilitating reproducible preprocessing.
2. It aligned feature selection with the analytic focus of the thesis, enabling machine learning models to leverage variables that are both conceptually meaningful and longitudinally robust across multiple waves.

The six thematic groups integrate information from CAPI, SCQ, and derived variables, covering socio demographic context, physical health, functional status, lifestyle behaviours, nutrition/metabolic biomarkers, and psychological/cognitive

### 3. TECHNICAL APPROACH

---

**Table 3.2:** PMF Derived Variable Prefixes ([3])

| Variable Prefix | Research Area                                       |
|-----------------|-----------------------------------------------------|
| ADL             | Activities of daily living                          |
| BEH             | Health behaviours                                   |
| BLOODS          | Results of blood sample analysis                    |
| BP              | Blood pressure from sphygmomanometer                |
| COG             | Scales and questions on cognition                   |
| CRT             | Choice reaction time (cognitive test)               |
| DIS             | Disability, functional impairment, helpers          |
| FR              | Frailty, gait, exercise, falls and fractures        |
| G2G             | Gateway to Global Aging Data                        |
| GRIP            | Grip strength                                       |
| IADL            | Instrumental activities of daily living             |
| INC             | Income variables                                    |
| MD              | Medication data                                     |
| MH              | Scales and questions on mental health and wellbeing |
| SCR             | Screening tests                                     |
| SES             | Social class and socio                              |
| SOC             | Social                                              |

### 3.4 Thematic Grouping

---

measures. This structured grouping enhances interpretability, ensures comprehensive domain coverage, and provides a foundation for downstream predictive modelling and risk assessment.

### 3. TECHNICAL APPROACH

---

**Table 3.3:** Thematic grouping of longitudinal features

| ID | Thematic Group                      | Description                                                                                          | Representative Variables                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----|-------------------------------------|------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | Socio Demographic & Context         | Baseline Stratification Factors: Age, Gender, Education, Income Variables (INC), Marital Status, SOC | Self Rated Health Screening Tests (SCR), BMI, BP, Comorbidity Count Medication Data (MD)<br>FR Index FR, UGS, Falls History <i>SCQFalls</i> , Instrumental Activities of Daily Living (IADL) Disability, Functional Impairment and Helpers (DIS)<br>Smoking, Alcohol Intake <i>SCQAlco</i> , PA International Physical Activity Questionnaire (IPAQ)<br>Plasma Carotenoids, Lutein, Zeaxanthin, Vitamin D/B12, Cholesterol<br>CES-D, Loneliness <i>MHucla</i> , Scales and Questions on Cognition (COG), Choice Reaction Time (Cognitive Test) (CRT) |
| 2  | Physical Health & Clinical Baseline | Self reported and clinical indicators                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 3  | Functional Status & FR              | Measures of mobility and physical decline                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 4  | Lifestyle & Behavioural             | Modifiable health related behaviours                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 5  | Nutrition & Metabolic Biomarkers    | Objective nutritional and metabolic markers                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 6  | Psychological & Cognitive           | Mental health and cognitive performance                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |

# Chapter 4

## Implementation Details

### 4.1 Data Preprocessing

The preprocessing pipeline’s primary aim was to convert all features, regardless of their original datatype (float, categorical, object, or mixed formats), into a standardised numerical representation suitable for machine learning. All nonresponse and sentinel values were consistently mapped to the numerical placeholder `-1.0`, and all valid entries were converted to `float64`. This ensured compatibility across the TILDA waves and enabled uniform downstream operations for feature engineering and modeling.

#### 4.1.1 Input data shape (post manual filtering)

The dimensions of the manually filtered datasets, which serve as the input for the automated cleaning engine, are in table 4.1. This initial manual filtering step removed noninformative features (e.g., columns with zero variation, unique participant IDs, and nonessential administrative fields), resulting in a substantial reduction of up to half 50% of the original raw variable count (e.g., from 1619 to 809 in Wave 1). While the Harmonised dataset uses a reduced subset of variables pre aligned to G2G standards, it was subjected to the same deterministic cleaning steps to ensure numerical consistency with the full five wave datasets used for modelling.

## 4. IMPLEMENTATION DETAILS

---

Although many Harmonised TILDA variables appeared superficially numeric, inspection of the raw values revealed that they frequently consisted of prefixed numeric labels followed by descriptive text (e.g., “1.Rarely or none of the time (less than 1 day)”, “4.All of the time (5–7 days)”). While these formats might suggest that simple string stripping could recover numeric values, such an approach would have introduced semantic errors for censored range, calendar, frequency, and other hybrid response formats. For example, a Harmonised value such as “5–7 days” would reduce to 5 if stripped, whereas the appropriate numerical representation for consistency with the five wave cleaning logic is the midpoint of the range.

Applying the full pipeline guaranteed numerical consistency and prevented subtle distortions that would otherwise arise from inconsistent handling of hybrid string numeric representations.

**Table 4.1:** Input Shape for Cleaning Pipeline (Post Manual Variable Filtering)

| Dataset    | Row (participants) | Column (features) |
|------------|--------------------|-------------------|
| Wave 1     | 8501               | 809               |
| Wave 2     | 7206               | 482               |
| Wave 3     | 6397               | 639               |
| Wave 4     | 5713               | 592               |
| Wave 5     | 4978               | 577               |
| Harmonised | 8501               | 453               |

### 4.2 Cleaning Engine

The core challenge in converting heterogeneous variable types across five (including harmonised) waves into a single numerical standard required constructing a reproducible pipeline to achieve *numerical homogeneity*, referring to the property that all retained features are represented as consistent numerical values (float64) with a unified missing/sentinel code ( $-1.0$ ), enabling uniform downstream processing. This was accomplished by developing a two stage system: *variable sce-*



*nario mapping*, specifically inside the “detect\_column\_scenario\_mapping” function, C and the final *six step deterministic cleaning engine* D.

### 4.2.1 Stage 1: Variable scenario mapping and validation

An exploratory visualiser was used to systematically inspect the raw data distributions, unique values, and data type inconsistencies across all waves. This audit initially identified between five and seven distinct data scenarios, which were expanded and refined during development to nine total scenarios to cover the full scope of data heterogeneity: from simple numeric fields and numeric data with symbols to Likert type scales, calendar based frequency strings, and complex mixed string numeric fields. These nine initial scenarios were then systematically collapsed and categorised into the six final cleaning steps, reflecting an ordering based on transformation confidence.

The pipeline’s first stage utilised an automated function (see appendix C), powered by the **re** (Regex) Python library, to classify every raw variable into one of these nine scenarios. During development, a dedicated “unknown complex” category was crucial: features routed here indicated a failure of the detection logic. This iterative debugging process, which identified and fixed classification errors, significantly drove the robustness of the final detection mechanism by ensuring the pipeline correctly classified features that initially appeared ambiguous.


To ensure robustness, the classification output was immediately processed by a validation routine that generated a comprehensive dictionary of all pre and post transformed features, along with their corresponding sample values. This dictionary was organised by the detected scenario after each cleaning step facilitated for manual inspection. The dictionary generated inside the “show\_grouped\_vars\_for\_scenarios” function was formatted to create an automatic friendly “.md” file for rapid, surface level verification, which honed the final mapping dictionary D. This process of using automated detection followed by visual, manual validation was essential for correcting errors in classification logic before the subsequent scenario transformations were executed in the pipeline.

## 4. IMPLEMENTATION DETAILS

---

### 4.2.2 Stage 2: Deterministic six step cleaning sequence

The nine input scenarios were processed by the *six step cleaning engine*. Resolving simple and unambiguous cases first increased the proportion of clean numerical features before addressing complex structures, which involved the censored and multi-class scenarios (figure 4.1). This deterministic sequence applied the same logic across all waves to ensure consistent data alignment (see appendix D).

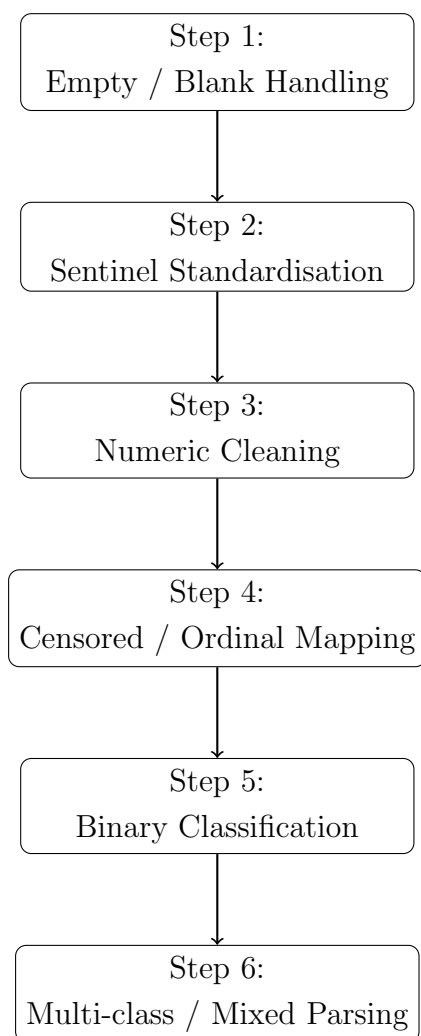

**Figure 4.1:** Flowchart of the final six step cleaning pipeline applied to all TILDA waves. See full transformation tables in appendix B.7 and D for detailed scenario progression code at each step.

A key difficulty in cleaning the five TILDA waves was the lack of guaranteed ordering in categorical values for the same variable across different waves (e.g., Wave 1 `feature(x)`: ['Very Good', 'Fair', 'Excellent', 'Good', 'Poor', 'DK', 'RF'] and Wave 3 `feature(x)`: ['Excellent', 'Fair', 'Very Good', 'RF', 'Poor', 'DK', 'Good']). If the cleaning engine relied on a positional index (like traditional label encoding) for transformation, this inconsistency would result in different numerical codes for the same semantic category across waves (e.g., Wave 1  $\rightarrow$  [4.0, 2.0, 5.0, 3.0, 1.0, -1.0], Wave 3  $\rightarrow$  [4.0, 2.0, 5.0, 3.0, 1.0, -1.0]). To overcome this, the cleaning engine was designed to be *order invariant* wherever possible, particularly in the later steps. For multi class scenarios (Step 6), this required an explicit, wave independent lookup based on the category string itself to ensure that a category string, once transformed to a numerical value, remained consistent regardless of its appearance order in the raw data.

### 4.2.3 Scenario steps and their technical focus

1. **Empty / Blank Values:** Converts all NaN, empty strings, and whitespace to the standard non response value -1.0.
2. **Sentinel Values:** Standardises wave specific non response codes (e.g., -98, -99) and documented textual sentinels (e.g., "dk", "not applicable") from the TILDA PMF release guide to the unified -1.0 placeholder.
3. **Numeric Transformation:** Removes non numeric characters (units, symbols, white spaces) and converts censored or annotated numeric strings (e.g., "50+", "<10", "1-2.5") to a numerical float equivalent (e.g., boundary value or midpoint).
4. **Censored Categorical:** Applies explicit, known ordinal transformations and predefined mappings to features where text labels represent a latent numerical or ordered scale (e.g., health rating scales, Likert ranges). This step was intentionally performed manually for a subset of low count features to

## 4. IMPLEMENTATION DETAILS

---

build intuition and reliable mapping dictionaries for the more complex subsequent scenarios. This included conversions for calendar based frequency strings like "twice a week" to a numerical weekly equivalent.

5. **Binary Categorical:** Automatically maps two level features (e.g., Yes/No, Male/Female) to 1.0/0.0. Importantly, this mapping is *order invariant*: the numerical assignment does not depend on the original ordering of category labels in the raw data (e.g., [Male, Female] versus [Female, Male]). Instead, the encoding relies on *semantic detection rules* (e.g., assigning 0.0 to negated or absence indicating strings such as "no", "not", or wave specific refusal codes, under context constraints) alongside *count based detection rules* (where a variable exhibits exactly two non missing unique values). This design choice ensures consistent binary representation across waves and features, independent of label ordering or survey specific value presentation.
6. **Multi-class / Mixed (The Complex Scenario):** This final step processes all remaining multi label, mixed type, and string numeric hybrid columns. The challenge was made more complex by the fact that the order of categorical string values could vary across waves, as discussed previously. To handle this, numerical assignments were made using an explicit dictionary lookup based on the original order of the sample values, rather than relying on positional or alphabetical order. This ensured consistent numerical representation. The step performs extensive lexical processing, dedicated number extraction, and rule based mapping to convert dense, unstandardised text into numerical floats, ensuring all residual variable types are successfully quantified. The transformed values were subject to increased manual verification due to the variable complexity.

### 4.3 Cleaning Validation

Following cleaning...

# Chapter 5

## Empirical Evaluation

### 5.1 References

Open the file ‘references\_myphd’ with BibTex. The file is located in ‘/7\_references/’

The file contains a series of templates for the proper formatting of references according to the Harvard referencing style. Click on each reference in the text below to see how Latex has formatted the reference on the References section.

- **Book:** (? , p. 10) (page number required only if referring to an in-text quote)
- **Book Chapter:** (? )
- **Book Contribution:** (? )
- **MUSIC CD/DVD:** (? )
- **Journal Article:** (? )
- **Patent:** (? )
- **PhD/Master Dissertation:** (? )
- **Conference Paper:** (? )
- **Technical Report:** (? )

## 5. EMPIRICAL EVALUATION

---

- **Unpublished Report:** (? )
- **Web Videos**(? ) (. . . not the name of the person who uploaded the video though)
- **Web Paper:** (? )
- **Web Journal Article:** (? )
- **Webpage:** (? )
- **Downloaded Images or Sounds:** (? )

You can also use this kind of referencing if needed in the text:  
Surname [? ] said that . . .

# Chapter 6

## Conclusion

### 6.1 Summary

### 6.2 Conclusions

#### 6.2.1 Data availability Statement

The data analysed in this study is subject to the following licenses/ restrictions:  
The datasets generated during and/or analysed during the current study are not publicly available due to data protection regulations but are accessible at TILDA on reasonable request. Requests to access these datasets should be directed to <https://tilda.tcd.ie/data/accessing-data/>.

#### 6.2.2 Ethics Statement

The studies involving human participants were reviewed and approved by Faculty of Health Sciences Research Ethics Committee at Trinity College Dublin, Ireland. The patients/ participants provided their written informed consent to participate in this study.

## 6. CONCLUSION

---

### 6.3 Contributions

### 6.4 Future Work



# Appendix A

## Python code for exporting PMF metadata to CSV

```
1 import pandas as pd
2 import pyreadstat
3 from pathlib import Path
4 import json
5
6 data_files = {
7     "wave1.json": "data/0053-01_TILDA_Wave1_2009-2011/0053-01
8         _TILDA_Wave1_Data/SPSS/0053-01_TILDA_Wave1_PMF_v1.12.sav",
9     "wave2.json": "data/0053-01_TILDA_Wave2_2012-2013/Data
10         /0053-02_TILDA_Wave2_PMF_v2.7.sav",
11     "wave3.json": "data/0053-01_TILDA_Wave3_2014-2015/Data
12         /0053-04_TILDA_Wave3_PMF_v3.6.sav",
13     "wave4.json": "data/0053-01_TILDA_Wave4_2016/Data/0053-05
14         _TILDA_Wave4_PMF_v4.4.sav",
15     "wave5.json": "data/0053-01_TILDA_Wave5_2018/Data/0053-06
16         _TILDA_Wave5_PMF_v5.5.sav",
17     "harmonized.json": "data/0053-06_TILDA_Harmonized_2016/Data
18         /0053-03_TILDA_Harmonized_v1.2.dta",
19 }
20
21 def load_df_with_var_of_interest(
22     var_dir="var_of_interest", data_files=data_files, verbose=
23         False
```

## A. PYTHON CODE FOR EXPORTING PMF METADATA TO CSV

---

```
18 ):
19     dfs = {}
20     var_dir = Path(var_dir)
21
22     for json_name, data_path in data_files.items():
23         file = var_dir / json_name
24         with open(file, "r") as f:
25             vars_list = json.load(f).get("variables_of_interest")
26             if verbose:
27                 print(f"Variables_of_interest_from_{file.name}:_{vars_list[:10]}_...")
28
29         if data_path.endswith(".sav"):
30             df_full, meta = pyreadstat.read_sav(
31                 data_path, encoding="latin1", apply_value_formats=True
32             )
33             df, _ = pyreadstat.read_sav(
34                 data_path,
35                 usecols=vars_list,
36                 encoding="latin1",
37                 apply_value_formats=True,
38             )
39         else:
40             df_full = pd.read_stata(data_path,
41                                     convert_categoricals=True)
42             df = pd.read_stata(data_path, convert_categoricals=True)[vars_list]
43
44         if verbose:
45             print(
46                 f"Data_shape_(Original):_{df_full.shape[0]}_rows_x_{df_full.shape[1]}_columns"
47             )
48             print(f"Data_shape_(Cleaned):_{df.shape[0]}_rows_x_{df.shape[1]}_columns")
49             print("-----")
50
51     dfs[file.stem] = df
```

---

```

52     return dfs
53
54
55 if __name__ == "__main__":
56     for json_name, path_str in data_files.items():
57         path = Path(path_str)
58         wave_name = json_name.replace(".json", "")
59         if path_str.endswith(".sav"):
60             # SPSS
61             df, meta = pyreadstat.read_sav(
62                 path, encoding="latin1", apply_value_formats=True
63             )
64
65         else: # Stata .dta file
66             df, meta = pyreadstat.read_dta(path, encoding="latin1")
67
68         pd.DataFrame(
69             {"variable": meta.column_names, "label": meta.
70              column_labels}
71         ).to_csv(Path("output") / f"{wave_name}
72                  _variable_descriptions.csv", index=False)
73
74         print(f"-----wave_{path}-----")
75         print(df.shape)
76         print(df.columns[:20])
77         print(
78             "Variable/Feature_descriptions, csv_file_saved_
79             successfully->dir=output/"
80         )
81         df.to_csv((Path("output") / f"{wave_name}.csv"), index=
82                   False)
83
84     dfs = load_df_with_var_of_interest(verbose=True)

```

# Appendix B

## Scenario Cleaning Pipeline Tables

**Table B.1:** Initial Raw Feature Counts Categorised by Nine Scenarios (Pre Cleaning)

| Scenario                        | Wave 1     | Wave 2     | Wave 3     | Wave 4     | Wave 5     | Harmonised |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Empty / blank values            | 9          | 0          | 7          | 0          | 9          | 0          |
| Numeric with sentinel           | 187        | 59         | 143        | 60         | 100        | 141        |
| Clean numeric                   | 14         | 27         | 18         | 22         | 20         | 8          |
| Censored / bracketed numeric    | 84         | 71         | 91         | 85         | 85         | 73         |
| Binary categorical              | 248        | 159        | 177        | 220        | 207        | 187        |
| Multi class categorical / mixed | 267        | 166        | 203        | 205        | 156        | 44         |
| Single value categorical        | 0          | 0          | 0          | 0          | 0          | 0          |
| Special symbol / mixed          | 0          | 0          | 0          | 0          | 0          | 0          |
| Unknown / complex mixed         | 0          | 0          | 0          | 0          | 0          | 0          |
| <b>Total Columns</b>            | <b>809</b> | <b>482</b> | <b>639</b> | <b>592</b> | <b>577</b> | <b>453</b> |

**Table B.2:** Scenario Count Progression: Post Step 1 (Empty / Blank Handling)

| Scenario                        | Wave 1     | Wave 2     | Wave 3     | Wave 4     | Wave 5     | Harmonised |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Empty / blank values            | 0          | 0          | 0          | 0          | 0          | 0          |
| Numeric with sentinel           | 81         | 31         | 42         | 32         | 75         | 15         |
| Clean numeric                   | 124        | 55         | 123        | 50         | 54         | 134        |
| Censored / bracketed numeric    | 84         | 71         | 91         | 85         | 85         | 73         |
| Binary categorical              | 251        | 159        | 179        | 220        | 207        | 187        |
| Multi class categorical / mixed | 269        | 166        | 204        | 205        | 156        | 44         |
| Single value categorical        | 0          | 0          | 0          | 0          | 0          | 0          |
| Special symbol / mixed          | 0          | 0          | 0          | 0          | 0          | 0          |
| Unknown / complex mixed         | 0          | 0          | 0          | 0          | 0          | 0          |
| <b>Total</b>                    | <b>809</b> | <b>482</b> | <b>639</b> | <b>592</b> | <b>577</b> | <b>453</b> |

**Table B.3:** Scenario Count Progression: Post Step 2 (Sentinel Standardisation)

| Scenario                        | Wave 1     | Wave 2     | Wave 3     | Wave 4     | Wave 5     | Harmonised |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Empty / blank values            | 0          | 0          | 0          | 0          | 0          | 0          |
| Numeric with sentinel           | 0          | 0          | 0          | 0          | 0          | 0          |
| Clean numeric                   | 205        | 86         | 165        | 82         | 129        | 149        |
| Censored / bracketed numeric    | 84         | 71         | 91         | 85         | 85         | 73         |
| Binary categorical              | 251        | 159        | 179        | 220        | 207        | 187        |
| Multi class categorical / mixed | 269        | 166        | 204        | 205        | 156        | 44         |
| Single value categorical        | 0          | 0          | 0          | 0          | 0          | 0          |
| Special symbol / mixed          | 0          | 0          | 0          | 0          | 0          | 0          |
| Unknown / complex mixed         | 0          | 0          | 0          | 0          | 0          | 0          |
| <b>Total</b>                    | <b>809</b> | <b>482</b> | <b>639</b> | <b>592</b> | <b>577</b> | <b>453</b> |

**Table B.4:** Scenario Count Progression: Post Step 3 (Numeric Cleaning)

| Scenario                        | Wave 1     | Wave 2     | Wave 3     | Wave 4     | Wave 5     | Harmonised |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Empty / blank values            | 0          | 0          | 0          | 0          | 0          | 0          |
| Numeric with sentinel           | 0          | 0          | 0          | 0          | 0          | 0          |
| Clean numeric                   | 263        | 117        | 215        | 124        | 172        | 149        |
| Censored / bracketed numeric    | 16         | 23         | 17         | 16         | 17         | 73         |
| Binary categorical              | 251        | 160        | 180        | 221        | 207        | 187        |
| Multi class categorical / mixed | 279        | 182        | 227        | 231        | 181        | 44         |
| Single value categorical        | 0          | 0          | 0          | 0          | 0          | 0          |
| Special symbol / mixed          | 0          | 0          | 0          | 0          | 0          | 0          |
| Unknown / complex mixed         | 0          | 0          | 0          | 0          | 0          | 0          |
| <b>Total</b>                    | <b>809</b> | <b>482</b> | <b>639</b> | <b>592</b> | <b>577</b> | <b>453</b> |

## Appendix

---

**Table B.5:** Scenario Count Progression: Post Step 4 (Censored / Ordinal Mapping)

| Scenario                        | Wave 1     | Wave 2     | Wave 3     | Wave 4     | Wave 5     | Harmonised |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Empty / blank values            | 0          | 0          | 0          | 0          | 0          | 0          |
| Numeric with sentinel           | 0          | 0          | 0          | 0          | 0          | 0          |
| Clean numeric                   | 279        | 140        | 233        | 140        | 189        | 222        |
| Censored / bracketed numeric    | 0          | 0          | 0          | 0          | 0          | 0          |
| Binary categorical              | 251        | 160        | 180        | 221        | 207        | 187        |
| Multi class categorical / mixed | 279        | 182        | 226        | 231        | 181        | 44         |
| Single value categorical        | 0          | 0          | 0          | 0          | 0          | 0          |
| Special symbol / mixed          | 0          | 0          | 0          | 0          | 0          | 0          |
| Unknown / complex mixed         | 0          | 0          | 0          | 0          | 0          | 0          |
| <b>Total</b>                    | <b>809</b> | <b>482</b> | <b>639</b> | <b>592</b> | <b>577</b> | <b>453</b> |

**Table B.6:** Scenario Count Progression: Post Step 5 (Binary Classification)

| Scenario                        | Wave 1     | Wave 2     | Wave 3     | Wave 4     | Wave 5     | Harmonised |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Empty / blank values            | 0          | 0          | 0          | 0          | 0          | 0          |
| Numeric with sentinel           | 0          | 0          | 0          | 0          | 0          | 0          |
| Clean numeric                   | 530        | 300        | 413        | 361        | 396        | 409        |
| Censored / bracketed numeric    | 0          | 0          | 0          | 0          | 0          | 0          |
| Binary categorical              | 0          | 0          | 0          | 0          | 0          | 0          |
| Multi class categorical / mixed | 279        | 182        | 226        | 231        | 181        | 44         |
| Single value categorical        | 0          | 0          | 0          | 0          | 0          | 0          |
| Special symbol / mixed          | 0          | 0          | 0          | 0          | 0          | 0          |
| Unknown / complex mixed         | 0          | 0          | 0          | 0          | 0          | 0          |
| <b>Total</b>                    | <b>809</b> | <b>482</b> | <b>639</b> | <b>592</b> | <b>577</b> | <b>453</b> |

**Table B.7:** Final Dfs Cleaned: Post Step 6 (Multi-Class / Mixed Parsing)

| Scenario                        | Wave 1     | Wave 2     | Wave 3     | Wave 4     | Wave 5     | Harmonised |
|---------------------------------|------------|------------|------------|------------|------------|------------|
| Empty / blank values            | 0          | 0          | 0          | 0          | 0          | 0          |
| Numeric with sentinel           | 0          | 0          | 0          | 0          | 0          | 0          |
| Clean numeric                   | 809        | 482        | 639        | 592        | 577        | 453        |
| Censored / bracketed numeric    | 0          | 0          | 0          | 0          | 0          | 0          |
| Binary categorical              | 0          | 0          | 0          | 0          | 0          | 0          |
| Multi class categorical / mixed | 0          | 0          | 0          | 0          | 0          | 0          |
| Single value categorical        | 0          | 0          | 0          | 0          | 0          | 0          |
| Special symbol / mixed          | 0          | 0          | 0          | 0          | 0          | 0          |
| Unknown / complex mixed         | 0          | 0          | 0          | 0          | 0          | 0          |
| <b>Total</b>                    | <b>809</b> | <b>482</b> | <b>639</b> | <b>592</b> | <b>577</b> | <b>453</b> |

# Appendix C

## First Stage: Scenario Variable Mapping

```
1 # Sentinel values (numeric and string)
2 # -1 and -1.0 is sentinel but will be used in the clean pipeline
3 standardised_sentinels = {'-1', '-1.0', -1, -1.0} # set ->
    duplicates removed -> counts correct -> single value detection
    is zero
4 numeric_sentinels = [-1, -1.0, -98, -98.0, -99, -99.0,
5                      95, 95.0, 96, 96.0, 98, 98.0, 99, 99.0]
6 string_sentinels = [str(x) for x in numeric_sentinels] + [f"_{x}"
7                  for x in numeric_sentinels] + \
8                  ['na', 'n/a', 'refused', 'missing', 'dk', 'rf', 'refused', "
9                  refuse", 'none', 'no_response', 'nan', 'not_answered', 'no
10                 answer',
11                 'not_applicable', 'no_consent', 'dont_know', "don't_know", "didn
12                 t_answer", 'prefer_not_to_say', 'task_not_done', '
13                 insufficient_sample', 'unable_to_record',
14                 '__', '*']
15 blanks = ['', ' ', '\t', '\n']
16
17 SCENARIOS = [
18     "Empty_/blank_values",
19     "Numeric_with_sentinel",
20     "Clean_numeric",
21     "Censored_/bracketed_numeric",
22     "Binary_categorical",
```

## C. FIRST STAGE: SCENARIO VARIABLE MAPPING

---

```
18     "Multi_class_categorical/_mixed",
19     "Single_value_categorical",
20     "Special_symbol/_mixed",
21     "Unknown/_complex_mixed"
22 ]
23
24
25 # flatten all dtypes across the waves to float and category
26 def flatten_column_types(df):
27     df_flat = df.copy()
28
29     for col in df_flat.columns:
30         if pd.api.types.is_numeric_dtype(df_flat[col]): # Numeric
31             # columns
32             df_flat[col] = df_flat[col].astype(float) # Convert
33             # to float
34         else:
35             df_flat[col] = ( # Convert to string, strip
36                 whitespace, lowercase, then category
37                 df_flat[col]
38                 .astype(str)
39                 .str.strip()
40                 .str.lower()
41                 .astype('category')
42             )
43
44     return df_flat
45
46 def detect_column_scenario_mapping(df, sample_size=10):
47     summary = []
48
49     # Regex patterns
50     special_symbols_pattern = r'[^A-Za-z0-9\s\.\,\-\+\&/()]' #
51     # special symbols excluding common numeric formatting
52     bracketed_numeric_pattern = r"\d{1,3}(?:,\d{3})*[-/]\d{1,3}(?:,\d{3})*|\d+\s*[\<>+-]" # patterns like "10-20",
53     # "30/40", ">=50"
54     sentinel_set = set(x.lower() for x in string_sentinels) #
55     # Lowercase string sentinels for comparison
56
57     for col in df.columns:
```



---

```

52     col_data = df[col].copy()
53     dtype = str(col_data.dtype) # get data type as string
54
55     # Convert to string for sentinel / blank detection
56     str_vals = col_data.astype(str).str.lower().str.strip() #
        lowercase and strip whitespace
57     clean_vals = col_data[~str_vals.isin(sentinel_set) & ~(
        str_vals.isin(blanks))] # remove sentinels and blanks
58
59     # Remove sentinels and blanks for scenario detection only
60     vals_no_sentinel = clean_vals[~clean_vals.astype(str).str
        .lower().isin(sentinel_set)
61                                     & ~clean_vals.astype(str).
        str.lower().isin(blanks)
62                                     ].unique()
63     num_unique_no_sentinel = len(vals_no_sentinel)
64
65     # Check if any sentinel values are present
66     sentinel_present = str_vals.isin(sentinel_set).any()
67
68     # Detection flags
69     empty_detected = str_vals.isin(blanks).any() or len(
        col_data) == 0
70
71     # Numeric detection: coerce to numeric, NaNs for non-
        numeric
72     numeric_vals = pd.to_numeric(clean_vals, errors='coerce')
73     # coerce non-numeric to NaN
74     numeric_like = numeric_vals.notna().all() and len(
        clean_vals) > 0 # all values are numeric-like after
        cleaning
75
76     sentinel_detected = str_vals[~str_vals.isin(
        standardised_sentinels)].isin(sentinel_set).any() # or
        col_data.eq(-1.0).any() # check for sentinel presence
77     censored_detected = clean_vals.astype(str).str.contains(
        bracketed_numeric_pattern).any() # check for bracketed
        numeric patterns
78
79     # Binary categorical detection (exactly 2 unique values
        after cleaning)

```

## C. FIRST STAGE: SCENARIO VARIABLE MAPPING

---

```
78     binary_categorical_detected = False
79     if dtype == 'category':
80         if num_unique_no_sentinel == 2:
81             binary_categorical_detected = True
82         elif num_unique_no_sentinel == 1 and sentinel_present
83             :
84             binary_categorical_detected = True
85
86     # Multi-class categorical (3+ unique values, object/
87     # category)
88     multi_class_categorical_detected = num_unique_no_sentinel
89     > 2 and dtype == 'category'
90
91     # Single value categorical
92     single_value_detected = num_unique_no_sentinel == 1 and
93     not binary_categorical_detected
94
95     # Special symbols detection (ignore numeric formatting)
96     symbol_detected = clean_vals.astype(str).str.contains(
97     special_symbols_pattern).any()
98
99     # Mixed types detection
100    mixed_detected = len(set(type(v) for v in col_data)) > 1
101    # more than one data type present
102
103    # Determine scenario in order of pipeline
104    if empty_detected:
105        scenario = SCENARIOS[0]
106        handling = "Replace_numeric/categorical_empty/blank_
107        with_-1.0"
108    elif numeric_like and sentinel_detected:
109        scenario = SCENARIOS[1]
110        handling = "Replace_numeric_sentinel_values_with_-1.0
111        "
112    elif numeric_like and not sentinel_detected:
113        scenario = SCENARIOS[2]
114        handling = "Keep_as_numeric"
115    elif censored_detected:
116        scenario = SCENARIOS[3]
117        handling = "Convert_numeric_ranges_to_midpoints_or_
118        keep_as_categorical"
```

---

```

110     elif binary_categorical_detected:
111         scenario = SCENARIOS[4]
112         handling = "Encode as 0/1 or keep as category"
113     elif multi_class_categorical_detected:
114         scenario = SCENARIOS[5]
115         handling = "One-hot encode, label encode, or keep as
116                     category"
117     elif single_value_detected:
118         scenario = SCENARIOS[6]
119         handling = "Keep as category / constant column"
120     elif symbol_detected:
121         scenario = SCENARIOS[7]
122         handling = "Inspect and preprocess based on context"
123     else:
124         scenario = SCENARIOS[8]
125         handling = "Inspect manually / complex mixed types"
126
127     sample_values = list(col_data.unique()[:sample_size]) #
128                     sample unique values
129
130     summary.append({
131         'Variable': col,
132         'DataType': dtype,
133         'UniqueValues': num_unique_no_sentinel,
134         'Scenario': scenario,
135         'SuggestedHandling': handling,
136         'SampleValues': sample_values
137     })
138
139     return pd.DataFrame(summary)

```

---

# Appendix D

## Second Stage: Deterministic six step cleaning engine

```
1 # Cleaning pipeline to all waves
2 dfs_cleaned = {}
3
4 # flattened dtype df
5 dfs_flat = {wave: flatten_column_types(df) for wave, df in dfs.
6             items()} # flatten dtypes
7
8 # Original df
9 display(scenario_count_table(dfs_flat).style.set_caption("
10     Original Table - pre cleaning")) # display original scenario
11     count table
12
13 # Step 1: Clean empty/missing values
14 dfs_step1 = {wave: clean_empty_missing(df) for wave, df in
15             dfs_flat.items()} # apply step 1 cleaning
16 display(scenario_count_table(dfs_step1).style.hide(axis="index").
17         set_caption("Step 1: Empty / Blank - post cleaning"))
18
19 # Step 2: Clean sentinel values
20 dfs_step2 = {wave: clean_sentinel(df) for wave, df in dfs_step1.
21             items()} # apply step 2 cleaning
22 display(scenario_count_table(dfs_step2).style.hide(axis="index").
23         set_caption("Step 2: Sentinel - post cleaning"))
24
```

---

```

18 # Step 3: Numerical Transformation
19 dfs_step3 = {wave: numerical_transform(df) for wave, df in
    dfs_step2.items()} # apply step 3 cleaning
20 display(scenario_count_table(dfs_step3).style.hide(axis="index").
    set_caption("Step 3: Numeric Transformation - post cleaning"))
21
22 # Step 4: Categorical Transformation for censored scenario
23 dfs_step4 = {wave: categorical_transform_S4(df) for wave, df in
    dfs_step3.items()} # apply step 4 cleaning
24 display(scenario_count_table(dfs_step4).style.hide(axis="index").
    set_caption("Step 4: Category Transformation S4 - post
    cleaning"))
25
26 # Step 5: Categorical Transformation for binary values
27 dfs_step5 = {wave: categorical_transform_S5(df) for wave, df in
    dfs_step4.items()} # apply step 5 cleaning
28 display(scenario_count_table(dfs_step5).style.hide(axis="index").
    set_caption("Step 5: Category Transformation S5 - post
    cleaning"))
29
30 # Step 6: Categorical Transformation for multi class/mixed values
31 dfs_step6 = {wave: categorical_transform_S6(df) for wave, df in
    dfs_step5.items()} # apply step 6 cleaning
32 display(scenario_count_table(dfs_step6).style.hide(axis="index").
    set_caption("Step 6: Category Transformation S6 - post
    cleaning"))
33
34 dfs_cleaned = dfs_step6
35
36
37 def show_grouped_vars_for_scenarios(dfs, scenarios_to_show): #
    Function to show grouped variables per scenario across waves
    -> markdown format
38     """
39     Used to inspect the scenario variables/features that need
    handling for transformation/cleaning.
40     A pre and post cleaning helper function to identify variables
    that need specific handling and to
41     Inspect actual changes for a scenario from previous cleaning
    step to current step.
42     """

```

## D. SECOND STAGE: DETERMINISTIC SIX STEP CLEANING ENGINE

---

```
43
44 print("#_Category_Transformation_Mapping")
45 print(f"##_Scenario:_{scenarios_to_show}") # Markdown mapping
    dictionary header
46 for wave, df in dfs.items():
47     print(f"\n##_=====_{wave.upper()}_
        =====")
48
49     mapping_df = detect_column_scenario_mapping(df) # Get
        scenario mapping
50
51     for scenario in scenarios_to_show:
52         vars_in_scenario = mapping_df[mapping_df['Scenario']
            == scenario]['Variable'].tolist() # Variables in
            scenario
53         # print(f"\n--- Scenario: {scenario} ---") # Scenario
            header for pipeline git commit
54         print(f"\n---_Total:_{len(vars_in_scenario)}_---") #
            \n
55         if not vars_in_scenario:
56             print("No_variables_found.")
57             continue
58
59         # Dictionary: frozen set(values) -> list of variables
60         groups = {}
61
62         for var in vars_in_scenario:
63             unique_vals = list(dict.fromkeys(df[var].dropna()
                )) # Preserve first-seen order
64             key = tuple(unique_vals) # Use ordered tuple as
                key
65
66             if key not in groups: # Initialise list if key
                not present
67                 groups[key] = []
68             groups[key].append(var) # Append variable to the
                group
69
70         # Print grouped variables in markdown format friendly
            for Notion -> mapping dictionary
71         for value_set, var_list in groups.items():
```

---

```

72     print("\n*Variables:*","" + ",".join(var_list)
       + "'_{}_'" # \n
73     print(f"*Pre_transformed_values:*_{list(value_set)}_{}_")
74
75     # Pull transformed values from dfs_cleaned /
       specific step using preserved order
76     try:
77         df_before = df[var_list[0]]
78         df_after = dfs_cleaned[wave][var_list[0]]
79
80         # Build transformed list in same order as
           original values
81         transformed_vals = []
82         seen = set()
83
84         for orig_val in value_set: # Iterate through
           original values in order
85             mask = df_before == orig_val
86             if mask.any():
87                 trans_vals = df_after[mask].
                   unique().tolist() # Get unique
                   transformed values
88                 if trans_vals:
89                     transformed_vals.append(
                           trans_vals[0]) # Append
                           first transformed value
90     except Exception:
91         transformed_vals = []
92     print(f"*Transformed_numeric:*_{transformed_vals}_'")
93
94
95     scenarios_to_show = SCENARIOS
96     # scenarios_to_show = ["Clean numeric"]
97     # scenarios_to_show = ["Censored / bracketed numeric"]
98     # scenarios_to_show = ["Binary categorical"]
99     # scenarios_to_show = ["Multi class categorical / mixed"]
100
101     show_grouped_vars_for_scenarios(dfs_cleaned, scenarios_to_show) #
       prev step == comparison to current step else current step

```

## Appendix

---

```
transformed/cleaned for ready .md dictionary
```



# References

- [1] Kai Petersen, Sairam Vakkalanka, and Ludwik Kuzniarz. Guidelines for conducting systematic mapping studies in software engineering: An update. *Information and Software Technology*, 64:1–18, August 2015. ISSN 0950-5849. doi: 10.1016/j.infsof.2015.03.007. vi, 6, 8
- [2] Barbara Kitchenham, O. Pearl Brereton, David Budgen, Mark Turner, John Bailey, and Stephen Linkman. Systematic literature reviews in software engineering – A systematic literature review. *Information and Software Technology*, 51(1):7–15, January 2009. ISSN 09505849. doi: 10.1016/j.infsof.2008.09.009. vi, 6, 10
- [3] The Irish Longitudinal Study on Ageing. Tilda pseudonymised microdata file release guide v5.5. <https://tilda.tcd.ie/data/documentation/doc/TILDA> Accessed: 2025-10-09. vi, 28
- [4] Neal Haddaway, Matthew J Page, Chris C Pritchard, and Luke A McGuinness. PRISMA2020: An R package and Shiny app for producing PRISMA 2020-compliant flow diagrams, with interactivity for optimised digital transparency and Open Synthesis, 2022. vii, 9
- [5] James R. C. Davis, Silvin P. Knight, Orna A. Donoghue, Belinda Hernández, Rossella Rizzo, Rose Anne Kenny, and Roman Romero-Ortuno. Comparison of Gait Speed Reserve, Usual Gait Speed, and Maximum Gait Speed of Adults Aged 50+ in Ireland Using Explainable Machine Learning. *Front Netw Physiol*, 1:754477, 2021. ISSN 2674-0109. doi: 10.3389/fnetp.2021.754477. 1, 10, 11, 17, 19
- [6] Patrick V. Moore, Kathleen Bennett, and Charles Normand. Counting the time lived, the time left or illness? Age, proximity to death, morbidity and prescribing expenditures. *Social Science & Medicine*, 184:1–14, 2017. ISSN 0277-9536. doi: 10.1016/j.socscimed.2017.04.038.

## REFERENCES

---

- [7] Ying Huang, Yuhao Su, Ying Jiang, and Meilan Zhu. Sex differences in the associations between blood pressure and anxiety and depression scores in a middle-aged and elderly population: The Irish Longitudinal Study on Ageing (TILDA). *Journal of Affective Disorders*, 274:118–125, September 2020. ISSN 0165-0327. doi: 10.1016/j.jad.2020.05.133. 1
- [8] World Health Organization Europe. New data: Noncommunicable diseases cause 1.8 million avoidable deaths and cost US\$ 514 billion every year, reveals new WHO/Europe report. <https://www.who.int/europe/news/item/27-06-2025-new-data-noncommunicable-diseases-cause-1-8-million-avoidable-deaths-and-cost-us-514-billion-USD-every-year-reveals-new-who-europe-report>, 2025. 1
- [9] Niamh Rice and Charles Normand. The cost associated with disease-related malnutrition in Ireland. *Public Health Nutr*, 15(10):1966–1972, October 2012. ISSN 1475-2727. doi: 10.1017/S1368980011003624. 1
- [10] Caoileann H. Murphy, Eoin Duggan, James Davis, Aisling M. O’Halloran, Silvin P. Knight, Rose Anne Kenny, Sinead N. McCarthy, and Roman Romero-Ortuno. Plasma lutein and zeaxanthin concentrations associated with musculoskeletal health and incident frailty in The Irish Longitudinal Study on Ageing (TILDA). *Experimental Gerontology*, 171:112013, 2023. ISSN 0531-5565. doi: 10.1016/j.exger.2022.112013. 1, 3, 11, 14, 18, 19
- [11] Eamon Laird, Charlotte Lund Rasmussen, Rose Anne Kenny, and Matthew P. Herring. Physical Activity Dose and Depression in a Cohort of Older Adults in The Irish Longitudinal Study on Ageing. *JAMA Netw Open*, 6(7):e2322489, July 2023. ISSN 2574-3805. doi: 10.1001/jamanetworkopen.2023.22489. 1, 14
- [12] C. P. McDowell, R. K. Dishman, M. Hallgren, C. MacDonncha, and M. P. Herring. Associations of physical activity and depression: Results from the Irish Longitudinal Study on Ageing. *Experimental Gerontology*, 112:68–75, 2018. ISSN 0531-5565. doi: 10.1016/j.exger.2018.09.004. 1
- [13] Cathal McCrory, Ciaran Finucane, Celia O’Hare, John Frewen, Hugh Nolan, Richard Layte, Patricia M. Kearney, and Rose Anne Kenny. Social Disadvantage and Social Isolation Are Associated With a Higher Resting Heart Rate: Evidence From The Irish Longitudinal Study on Ageing. *J Gerontol B Psychol Sci Soc Sci*, 71(3):463–473, May 2016. ISSN 1079-5014. doi: 10.1093/geronb/gbu163. 1

## REFERENCES

---

- [14] Eamon Laird, Matthew P. Herring, Brian P. Carson, Catherine B. Woods, Cathal Walsh, Rose Anne Kenny, and Charlotte Lund Rasmussen. Physical activity for depression among the chronically ill: Results from older diabetics in the Irish longitudinal study on ageing. *Psychiatry Research*, 326:115274, August 2023. ISSN 0165-1781. doi: 10.1016/j.psychres.2023.115274. 3, 11
- [15] Sebastian Moguilner, Silvin P. Knight, James R. C. Davis, Aisling M. O’Halloran, Rose Anne Kenny, and Roman Romero-Ortuno. The Importance of Age in the Prediction of Mortality by a Frailty Index: A Machine Learning Approach in the Irish Longitudinal Study on Ageing. *Geriatrics (Basel)*, 6(3):84, August 2021. ISSN 2308-3417. doi: 10.3390/geriatrics6030084. 3, 10
- [16] Orna A Donoghue, Belinda Hernandez, Matthew D L O’Connell, and Rose Anne Kenny. Using Conditional Inference Forests to Examine Predictive Ability for Future Falls and Syncope in Older Adults: Results from The Irish Longitudinal Study on Ageing. *J Gerontol A Biol Sci Med Sci*, 78(4):673–682, April 2023. ISSN 1758-535X. doi: 10.1093/gerona/glac156. 3, 10, 11
- [17] Richard J. Torraco. Writing Integrative Literature Reviews: Guidelines and Examples. *Human Resource Development Review*, 4(3):356–367, September 2005. ISSN 1534-4843, 1552-6712. doi: 10.1177/1534484305278283. 6
- [18] Tonette S. Rocco and Maria S. Plakhotnik. Literature Reviews, Conceptual Frameworks, and Theoretical Frameworks: Terms, Functions, and Distinctions. *Human Resource Development Review*, 8(1):120–130, March 2009. ISSN 1534-4843, 1552-6712. doi: 10.1177/1534484309332617. 6
- [19] Andrew D Oxman and Gordon H Guyatt. Guidelines for reading literature reviews. 6
- [20] Muhammad Azeem Ashraf, Meijia Yang, Yufeng Zhang, Mouna Denden, Ahmed Tlili, Jiayi Liu, Ronghuai Huang, and Daniel Burgos. A Systematic Review of Systematic Reviews on Blended Learning: Trends, Gaps and Future Directions. *Psychology Research and Behavior Management*, 14:1525–1541, October 2021. ISSN null. doi: 10.2147/PRBM.S331741. 6
- [21] Xuezhong Xu, Xue Mingyang, Jie Yang, Hailong Zheng, and Zhifei Che. Tailored machine learning for evaluating the long-term diabetes risk in older individuals: Findings from the Irish Longitudinal Study on Ageing (TILDA). *BMJ Open*, 13

## REFERENCES

---

- (5):e072991, May 2023. ISSN 2044-6055. doi: 10.1136/bmjopen-2023-072991. 10, 11, 16, 17, 18, 19
- [22] Rory Boyle, Lee Jollans, Laura M. Rueda-Delgado, Rossella Rizzo, Görsev G. Yener, Jason P. McMorrow, Silvin P. Knight, Daniel Carey, Ian H. Robertson, Derya D. Emek-Savaş, Yaakov Stern, Rose Anne Kenny, and Robert Whelan. Brain-predicted age difference score is related to specific cognitive functions: A multi-site replication analysis. *Brain Imaging Behav*, 15(1):327–345, February 2021. ISSN 1931-7565. doi: 10.1007/s11682-020-00260-3. 10, 11, 16
- [23] Roy Tzemah-Shahar, Hagit Hochner, Khalil Iktilat, and Maayan Agmon. What can we learn from physical capacity about biological age? A systematic review. *Ageing Research Reviews*, 77:101609, May 2022. ISSN 1568-1637. doi: 10.1016/j.arr.2022.101609. 10
- [24] Morgana A. Shirsath, John D. O’Connor, Rory Boyle, Louise Newman, Silvin P. Knight, Belinda Hernandez, Robert Whelan, James F. Meaney, and Rose Anne Kenny. Slower speed of blood pressure recovery after standing is associated with accelerated brain ageing: Evidence from The Irish Longitudinal Study on Ageing (TILDA). *Cerebral Circulation - Cognition and Behavior*, 6:100212, January 2024. ISSN 2666-2450. doi: 10.1016/j.cccb.2024.100212. 10
- [25] Roman Romero-Ortuno, Peter Hartley, James Davis, Silvin P. Knight, Rossella Rizzo, Belinda Hernández, Rose Anne Kenny, and Aisling M. O’Halloran. Transitions in frailty phenotype states and components over 8 years: Evidence from The Irish Longitudinal Study on Ageing. *Archives of Gerontology and Geriatrics*, 95:104401, 2021. ISSN 0167-4943. doi: 10.1016/j.archger.2021.104401. 10, 11, 12, 19
- [26] Laura A Bardon, Melanie Streicher, Clare A Corish, Michelle Clarke, Lauren C Power, Rose Anne Kenny, Deirdre M O’Connor, Eamon Laird, Eibhlís M O’Connor, Marjolein Visser, Dorothee Volkert, Eileen R Gibney, and MaNuEL Consortium. Predictors of Incident Malnutrition in Older Irish Adults from the Irish Longitudinal Study on Ageing Cohort—A MaNuEL study. *J Gerontol A Biol Sci Med Sci*, 75(2):249–256, January 2020. ISSN 1079-5006. doi: 10.1093/gerona/gly225. 10, 11, 15, 18
- [27] Zuo Zhang, Lauren Robinson, Robert Whelan, Lee Jollans, Zijian Wang, Frauke Nees, Congying Chu, Marina Bobou, Dongping Du, Ilinca Cristea, Tobias Banaschewski, Gareth J. Barker, Arun L. W. Bokde, Antoine Grigis, Hugh Garavan,

## REFERENCES

---

- Andreas Heinz, Rüdiger Brühl, Jean-Luc Martinot, Marie-Laure Paillère Martinot, Eric Artiges, Dimitri Papadopoulos Orfanos, Luise Poustka, Sarah Hohmann, Sabina Millenet, Juliane H. Fröhner, Michael N. Smolka, Nilakshi Vaidya, Henrik Walter, Jeanne Winterer, M. John Broulidakis, Betteke Maria van Noort, Argyris Stringaris, Jani Penttilä, Yvonne Grimmer, Corinna Insensee, Andreas Becker, Yuning Zhang, Sinead King, Julia Sinclair, Gunter Schumann, Ulrike Schmidt, and Sylvane Desrivières. Machine learning models for diagnosis and risk prediction in eating disorders, depression, and alcohol use disorder. *Journal of Affective Disorders*, 379:889–899, June 2025. ISSN 0165-0327. doi: 10.1016/j.jad.2024.12.053. 10, 11
- [28] Dr Angelina R. Sutin, Martina Luchetti, Damaris Aschwanden, Yannick Stephan, Amanda A. Sesker, and Antonio Terracciano. Sense of meaning and purpose in life and risk of incident dementia: New data and meta-analysis. *Archives of Gerontology and Geriatrics*, 105:104847, 2023. ISSN 0167-4943. doi: 10.1016/j.archger.2022.104847. 10
- [29] doctoralwriting. Creating the literature review: Research questions and arguments, February 2016. 10
- [30] doctoralwriting. Creating the literature review: Research questions and arguments (Part 3 of 4), February 2016. 10
- [31] A. A. Zarudsky and K. I. Prashchayeu. P277: One-legged balance test and falls in old patients with cardiovascular diseases. *European Geriatric Medicine*, 5:S171–S172, 2014. ISSN 1878-7649. doi: 10.1016/S1878-7649(14)70448-6. 11, 16, 17
- [32] Chuanying Huang, Shuqin Sun, Xiaocao Tian, Tong Wang, Tianyu Wang, Haiping Duan, and Yili Wu. Age modify the associations of obesity, physical activity, vision and grip strength with functional mobility in Irish aged 50 and older. *Archives of Gerontology and Geriatrics*, 84:103895, 2019. ISSN 0167-4943. doi: 10.1016/j.archger.2019.05.020. 11, 12
- [33] Louis Jacob, Karel Kostev, Jae Il Shin, Lee Smith, Hans Oh, Adel S. Abduljabbar, Josep Maria Haro, and Ai Koyanagi. Falls increase the risk for incident anxiety and depressive symptoms among adults aged  $\geq 50$  years: An analysis of the Irish longitudinal study on ageing. *Archives of Gerontology and Geriatrics*, 114:105098, 2023. ISSN 0167-4943. doi: 10.1016/j.archger.2023.105098. 11, 14

## REFERENCES

---

- [34] Kevin McCarthy, Eamon Laird, Aisling M. O'Halloran, Padraic Fallon, Román Romero Ortuño, and Rose Anne Kenny. Association between metabolic syndrome and risk of both prevalent and incident frailty in older adults: Findings from The Irish Longitudinal Study on Ageing (TILDA). *Experimental Gerontology*, 172:112056, 2023. ISSN 0531-5565. doi: 10.1016/j.exger.2022.112056. 12
- [35] Ziggi Ivan Santini, Ai Koyanagi, Stefanos Tyrovolas, Josep Maria Haro, Robert J. Donovan, Line Nielsen, and Vibeke Koushede. The protective properties of Act-Belong-Commit indicators against incident depression, anxiety, and cognitive impairment among older Irish adults: Findings from a prospective community-based study. *Experimental Gerontology*, 91:79–87, 2017. ISSN 0531-5565. doi: 10.1016/j.exger.2017.02.074. 13
- [36] A. L. Juola, M. P. Bjorkman, H. Kautiainen, S. Pylkkanen, U. H. Finne-Soveri, H. Soini, K. H. Pitkälä, and J. S. Bell. O1.17: Nursing staff education to reduce potentially harmful medication use among older people in assisted living facilities: Effects of randomized controlled trial on cognition and falls. *European Geriatric Medicine*, 5:S50–S51, 2014. ISSN 1878-7649. doi: 10.1016/S1878-7649(14)70100-7. 13
- [37] Kevin McCarthy, Eamon Laird, Aisling M. O'Halloran, Cathal Walsh, Martin Healy, Annette L. Fitzpatrick, James B. Walsh, Belinda Hernández, Padraic Fallon, Anne M. Molloy, and Rose Anne Kenny. Association between vitamin D deficiency and the risk of prevalent type 2 diabetes and incident prediabetes: A prospective cohort study using data from The Irish Longitudinal Study on Ageing (TILDA). *EClinicalMedicine*, 53:101654, November 2022. ISSN 2589-5370. doi: 10.1016/j.eclinm.2022.101654. 14
- [38] Kevin McCarthy, Aisling M. O'Halloran, Padraic Fallon, Rose Anne Kenny, and Cathal McCrory. Metabolic syndrome accelerates epigenetic ageing in older adults: Findings from The Irish Longitudinal Study on Ageing (TILDA). *Experimental Gerontology*, 183:112314, 2023. ISSN 0531-5565. doi: 10.1016/j.exger.2023.112314. 15
- [39] Zahra Azizi, Rebecca J. Hirst, Alan O' Dowd, Cathal McCrory, Rose Anne Kenny, Fiona N. Newell, and Annalisa Setti. Evidence for an association between allostatic load and multisensory integration in middle-aged and older adults. *Archives of Gerontology and Geriatrics*, 116:105155, 2024. ISSN 0167-4943. doi: 10.1016/j.archger.2023.105155. 15

## REFERENCES

---

- [40] Soraya Matthews, Mark Ward, Anne Nolan, Charles Normand, Rose Anne Kenny, and Peter May. Predicting mortality in The Irish Longitudinal Study on Ageing (TILDA): Development of a four-year index and comparison with international measures. *BMC Geriatr*, 22:510, June 2022. ISSN 1471-2318. doi: 10.1186/s12877-022-03196-z. 16, 18, 19
- [41] James Davis, Silvin P. Knight, Rossella Rizzo, Orna A. Donoghue, Rose Anne Kenny, and Roman Romero-Ortuno. A linear regression-based machine learning pipeline for the discovery of clinically relevant correlates of gait speed reserve from multiple physiological systems. In *2021 29th European Signal Processing Conference (EUSIPCO)*, pages 1266–1270, August 2021. doi: 10.23919/EUSIPCO54536.2021.9616187. 17, 19