

TrafficTwin

A verifiable what-if loop for traffic and edge-computing research

One loop, two lenses—no silent promotion

TRAFFICTWIN · SUPERVISOR CHECKPOINT · 02


The differentiator is the binding between a question, its execution boundary, its measurements and its claim state.



The headline improves; service does not

TRAFFICTWIN · SUPERVISOR CHECKPOINT · 03

Mean latency by configured per-vehicle RSU concurrency

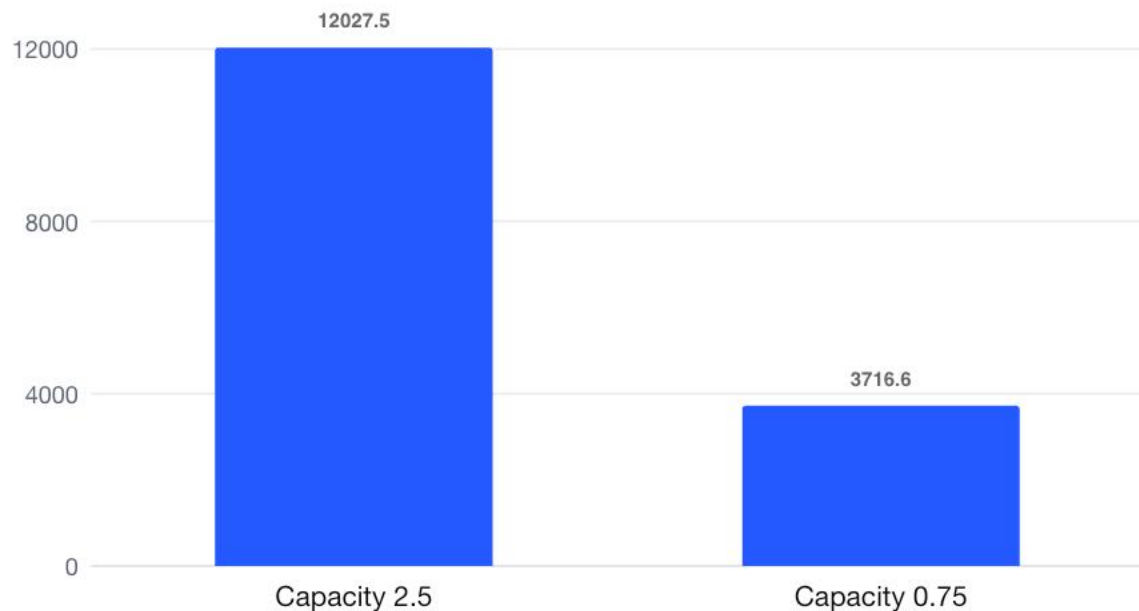

-8,310.9 ms

paired mean · n = 5 · every seed same direction

FLAT

deadline attainment
No service-success gain

0

ACTION MISMATCHES

8,956,800 decisions
in each of 9 pilot pairs

THE TAIL EXPLAINS THE REVERSAL

p50 stayed 44.3 ms; 97.9–99.4% of mass exceeded 1 s. Neither subgroup saw the fleet mean.

Decide what happens next

TRAFFICTWIN · SUPERVISOR CHECKPOINT · 04

Current standing

IMPLEMENTED

Auditable instrument, bounded what-if lifecycle, decision-safety and read-only contract browsers.

BOUNDED EVIDENCE

One signed central result; deviations, refutations and unavailable states remain visible.

DIRECTION

Signed multi-algorithm portfolio/benchmark, confirmatory mechanism work and Manchester Gate-D—only after their inputs exist.

DECISIONS REQUESTED

- 01** Gate-D: review the mapping, calibration and comparison contracts—and name the responsible reviewer.
- 02** Approve the next subgroup × matched actor/preset design and its compute envelope before execution.
- 03** Confirm the ethics-gated usability route and the final dissertation scope/reference convention.