




# Machine Learning - Polynomial Regression

[< Previous](#)[Next >](#)

## Polynomial Regression

If your data points clearly will not fit a linear regression (a straight line through all data points), it might be ideal for polynomial regression.

Polynomial regression, like linear regression, uses the relationship between the variables  $x$  and  $y$  to find the best way to draw a line through the data points.

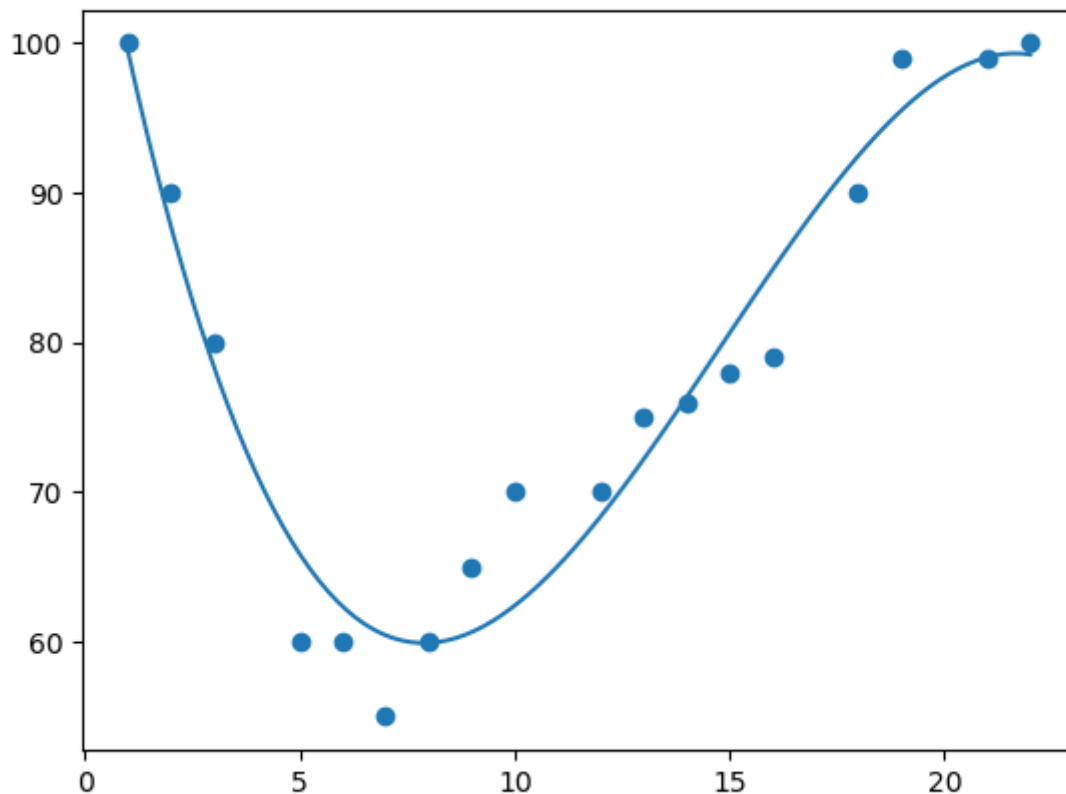

## How Does it Work?

Python has methods for finding a relationship between data-points and to draw a line of polynomial regression. We will show you how to use these methods instead of going through the mathematic formula.

In the example below, we have registered 18 cars as they were passing a certain tollbooth.

We have registered the car's speed, and the time of day (hour) the passing occurred.

The x-axis represents the hours of the day and the y-axis represents the speed:

## Example


Start by drawing a scatter plot:

```
import matplotlib.pyplot as plt

x = [1,2,3,5,6,7,8,9,10,12,13,14,15,16,18,19,21,22]
y = [100,90,80,60,60,55,60,65,70,70,75,76,78,79,90,99,99,100]
```

```
plt.scatter(x, y)  
plt.show()
```

Result:

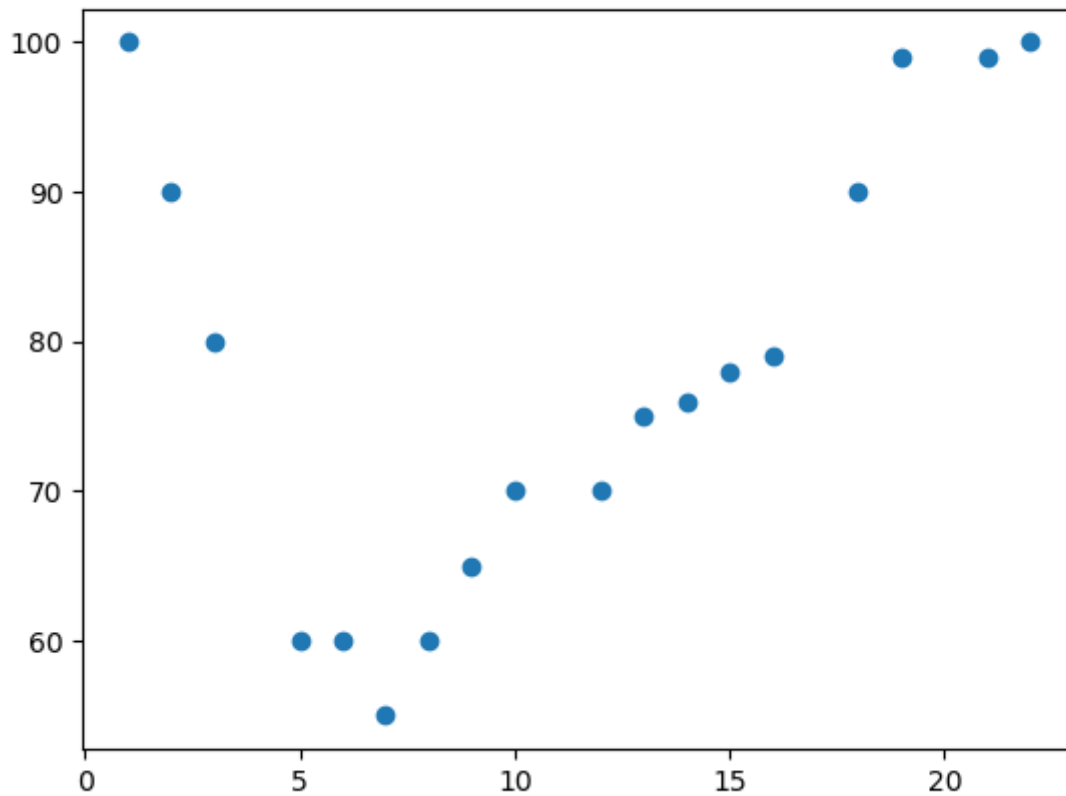

[Run example »](#)


## Example

Import `numpy` and `matplotlib` then draw the line of Polynomial Regression:

```
import numpy  
import matplotlib.pyplot as plt  
  
x = [1,2,3,5,6,7,8,9,10,12,13,14,15,16,18,19,21,22]  
y = [100,90,80,60,60,55,60,65,70,70,75,76,78,79,90,99,99,100]  
  
mymodel = numpy.poly1d(numpy.polyfit(x, y, 3))  
  
myline = numpy.linspace(1, 22, 100)
```

```
plt.scatter(x, y)
plt.plot(myline, mymodel(myline))
plt.show()
```

Result:

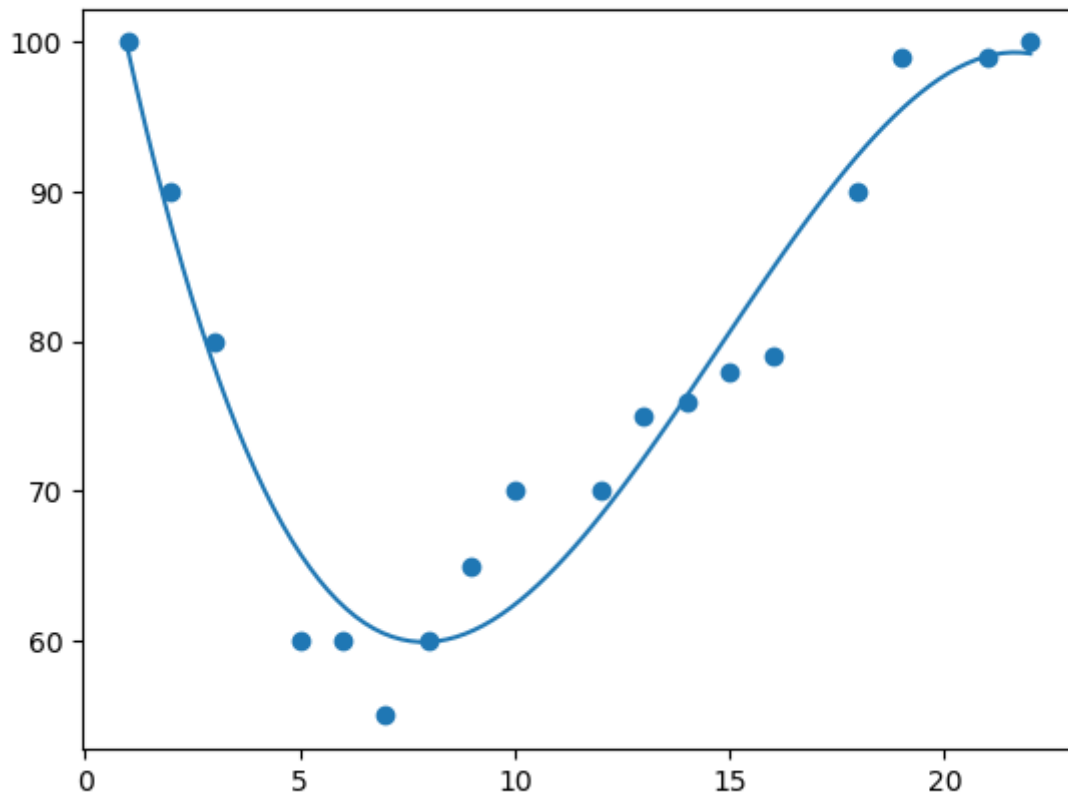

[Run example »](#)

## Example Explained

Import the modules you need:

```
import numpy
import matplotlib.pyplot as plt
```

Create the arrays that represents the values of the x and y axis:

```
x = [1,2,3,5,6,7,8,9,10,12,13,14,15,16,18,19,21,22]  
y = [100,90,80,60,60,55,60,65,70,70,75,76,78,79,90,99,99,100]
```

NumPy has a method that lets us make a polynomial model:

```
mymodel = numpy.poly1d(numpy.polyfit(x, y, 3))
```

Then specify how the line will display, we start at position 1, and end at position 22:

```
myline = numpy.linspace(1, 22, 100)
```

Draw the original scatter plot:

```
plt.scatter(x, y)
```

Draw the line of polynomial regression:

```
plt.plot(myline, mymodel(myline))
```

Display the diagram:

```
plt.show()
```

---

## R-Squared

It is important to know how well the relationship between the values of the x- and y-axis is, if there are no relationship the polynomial regression can not be used to predict anything.

The relationship is measured with a value called the r-squared.

The r-squared value ranges from 0 to 1, where 0 means no relationship, and 1 means 100% related.

Python and the Sklearn module will computed this value for you, all you have to do is feed it with the x and y arrays:

## Example

How well does my data fit in a polynomial regression?

```
import numpy
from sklearn.metrics import r2_score

x = [1,2,3,5,6,7,8,9,10,12,13,14,15,16,18,19,21,22]
y = [100,90,80,60,60,55,60,65,70,70,75,76,78,79,90,99,99,100]

mymodel = numpy.poly1d(numpy.polyfit(x, y, 3))

print(r2_score(y, mymodel(x)))
```

Try if Yourself »

**Note:** The result 0.94 shows that there is a very good relationship, and we can use polynomial regression in future predictions.

---

## Predict Future Values

Now we can use the information we have gathered to predict future values.

Example: Let us try to predict the speed of a car that passes the tollbooth at around 17 P.M:

To do so, we need the same `mymodel` array from the example above:

```
mymodel = numpy.poly1d(numpy.polyfit(x, y, 3))
```

## Example

Predict the speed of a car passing at 17 P.M:

```
import numpy
from sklearn.metrics import r2_score


x = [1,2,3,5,6,7,8,9,10,12,13,14,15,16,18,19,21,22]
y = [100,90,80,60,60,55,60,65,70,70,75,76,78,79,90,99,99,100]

mymodel = numpy.poly1d(numpy.polyfit(x, y, 3))

speed = mymodel(17)
print(speed)
```

[Run example »](#)

The example predicted a speed to be 88.87, which we also could read from the diagram:

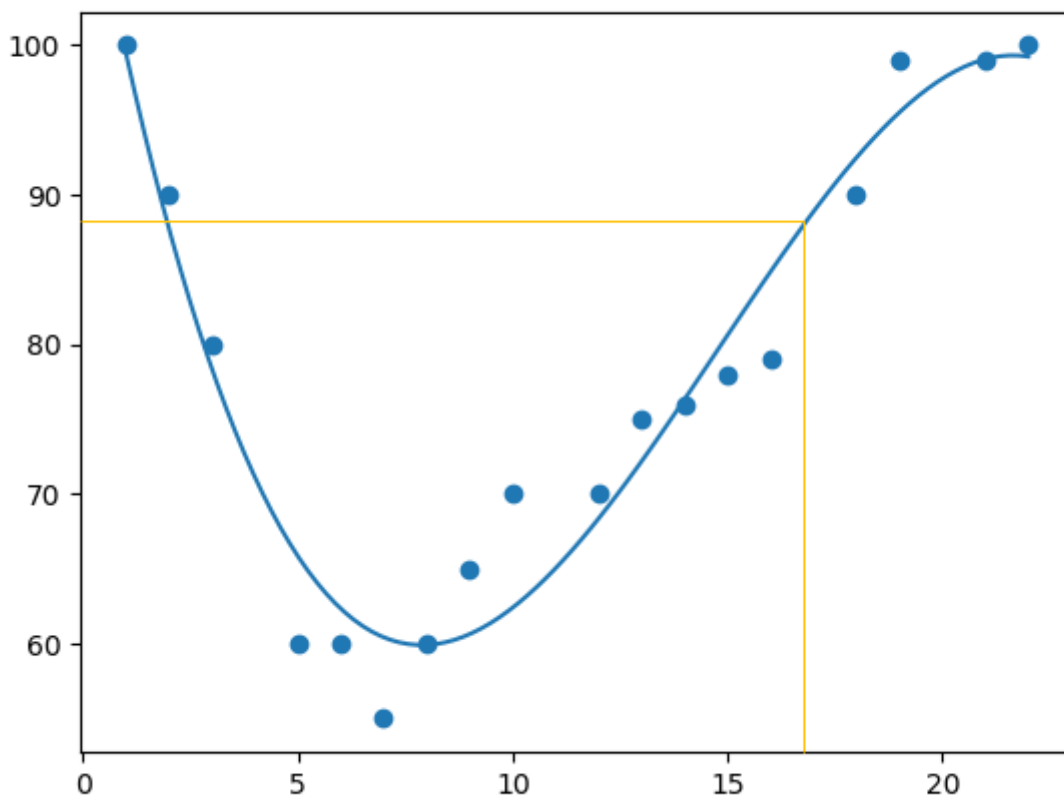

# Bad Fit?

Let us create an example where polynomial regression would not be the best method to predict future values.

## Example

These values for the x- and y-axis should result in a very bad fit for polynomial regression:

```
import numpy
import matplotlib.pyplot as plt

x = [89,43,36,36,95,10,66,34,38,20,26,29,48,64,6,5,36,66,72,40]
y = [21,46,3,35,67,95,53,72,58,10,26,34,90,33,38,20,56,2,47,15]


mymodel = numpy.poly1d(numpy.polyfit(x, y, 3))

myline = numpy.linspace(2, 95, 100)

plt.scatter(x, y)
plt.plot(myline, mymodel(myline))
plt.show()
```

Result:



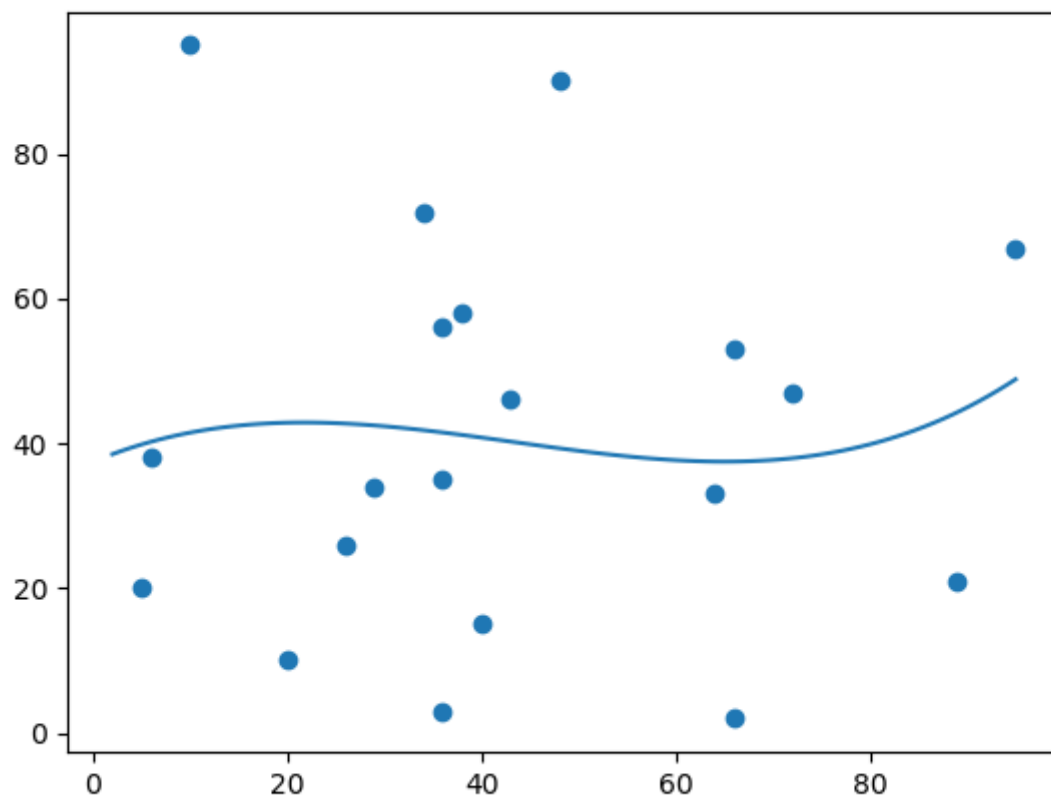

[Run example »](#)

And the r-squared value?

## Example

You should get a very low r-squared value.

```
import numpy
from sklearn.metrics import r2_score

x = [89, 43, 36, 36, 95, 10, 66, 34, 38, 20, 26, 29, 48, 64, 6, 5, 36, 66, 72, 40]
y = [21, 46, 3, 35, 67, 95, 53, 72, 58, 10, 26, 34, 90, 33, 38, 20, 56, 2, 47, 15]

mymodel = numpy.poly1d(numpy.polyfit(x, y, 3))


print(r2_score(y, mymodel(x)))
```

[Try if Yourself »](#)

The result: 0.00995 indicates a very bad relationship, and tells us that this data set is not suitable for polynomial regression.

[< Previous](#)[Next >](#)

## COLOR PICKER



## HOW TO

- Tabs
- Dropdowns
- Accordions
- Side Navigation
- Top Navigation
- Modal Boxes
- Progress Bars
- Parallax
- Login Form
- HTML Includes
- Google Maps
- Range Sliders
- Tooltips
- Slideshow
- Filter List
- Sort List

## SHARE





## CERTIFICATES

HTML  
CSS  
JavaScript  
SQL  
Python  
PHP  
jQuery  
Bootstrap  
XML

[Read More »](#)

---

---

[REPORT ERROR](#)

[PRINT PAGE](#)

[FORUM](#)

[ABOUT](#)

---

## Top Tutorials

HTML Tutorial  
CSS Tutorial  
JavaScript Tutorial  
How To Tutorial  
SQL Tutorial  
Python Tutorial  
W3.CSS Tutorial  
Bootstrap Tutorial  
PHP Tutorial  
jQuery Tutorial  
Java Tutorial  
C++ Tutorial

## Top References

HTML Reference  
CSS Reference  
JavaScript Reference

[SQL Reference](#)  
[Python Reference](#)  
[W3.CSS Reference](#)  
[Bootstrap Reference](#)  
[PHP Reference](#)  
[HTML Colors](#)  
[jQuery Reference](#)  
[Java Reference](#)  
[Angular Reference](#)

## Top Examples

[HTML Examples](#)  
[CSS Examples](#)  
[JavaScript Examples](#)  
[How To Examples](#)  
[SQL Examples](#)  
[Python Examples](#)  
[W3.CSS Examples](#)  
[Bootstrap Examples](#)  
[PHP Examples](#)  
[jQuery Examples](#)  
[Java Examples](#)  
[XML Examples](#)

## Web Certificates

[HTML Certificate](#)  
[CSS Certificate](#)  
[JavaScript Certificate](#)  
[SQL Certificate](#)  
[Python Certificate](#)  
[jQuery Certificate](#)  
[PHP Certificate](#)  
[Bootstrap Certificate](#)  
[XML Certificate](#)

[Get Certified »](#)

---

W3Schools is optimized for learning, testing, and training. Examples might be simplified to improve reading and basic understanding. Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using this site, you agree to have read and accepted our terms of use, cookie and privacy policy. Copyright 1999-2020 by Refsnes Data. All Rights Reserved.

Powered by W3.CSS.

