

Cucumber Report

Feb 16, 2024, 1:40:50 AM

Start : Feb 16, 1:40:12.143 AM

End : Feb 16, 1:40:46.826 AM

Duration : 34.683 s

Features

Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 1
FAILED - 2
SKIPPED - 0

PASSED - 4
FAILED - 2
SKIPPED - 4

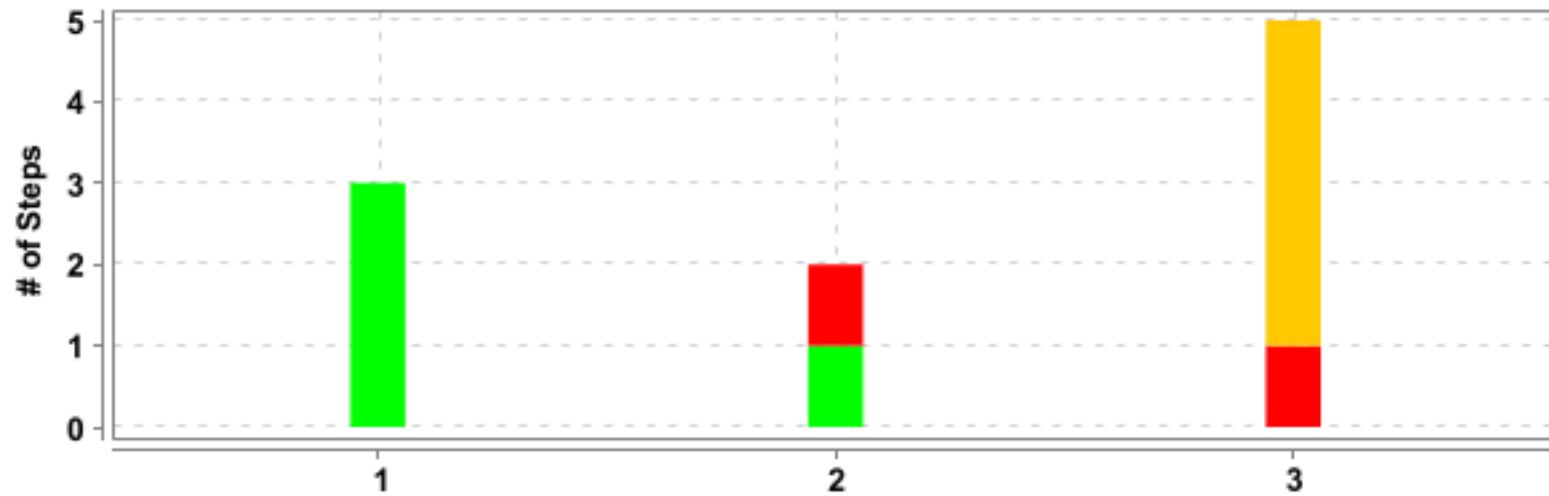


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Parallel Run Task</u>	34.683 s	3	1	2	0	10	4	2	4

Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Task_37	3	1	2	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Parallel Run Task</u>	3	1	2	0	34.683 s

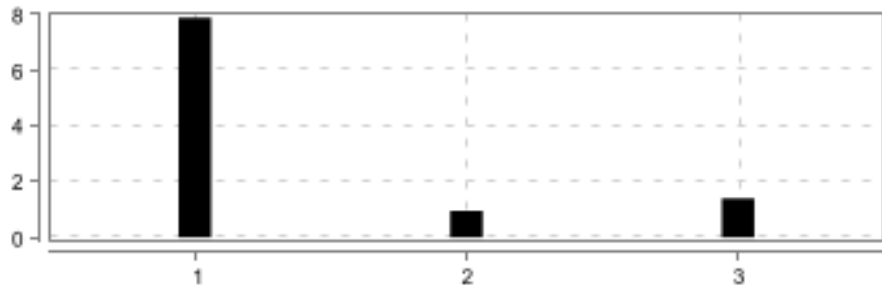



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Parallel Run Task</u>	<u>Todo List Data Table</u>	3	3	0	0	16.051 s
2	<u>Parallel Run Task</u>	<u>Form Page Data Table List<List<>></u>	2	1	1	0	3.269 s
3	<u>Parallel Run Task</u>	<u>Positive Login</u>	5	0	1	4	15.078 s

Parallel Run Task

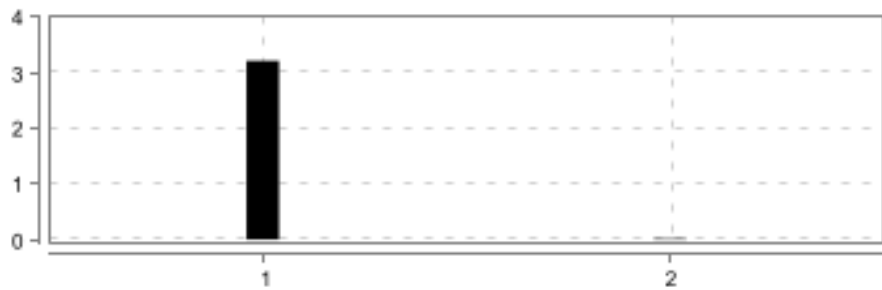

FAILED	DURATION - 34.683 s	Scenarios		Steps	
/ 1:40:12.143 AM // 1:40:46.826 AM /		Total - 3		Total - 10	
		Pass - 1		Pass - 4	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 4	

Todo List Data Table

<div>PASSED</div> <div>DURATION - 16.051 s</div>	<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 3</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 1:40:12.164 AM // 1:40:28.215 AM /</div>			
<div>Parallel Run Task</div>			
<div>@Task_37</div>			

#	Step / Hook Details	Status	Duration
1	Given goes to "http://webdriveruniversity.com/To-Do-List/index.html"	PASSED	7.873 s
2	When enters todos	PASSED	0.950 s
	Prepare breakfast		
	Wash the dishes		
	Take care of baby		
	Help your kid's homework		
	Study Selenium		
	Sleep		
3	Then users closes browser	PASSED	1.397 s

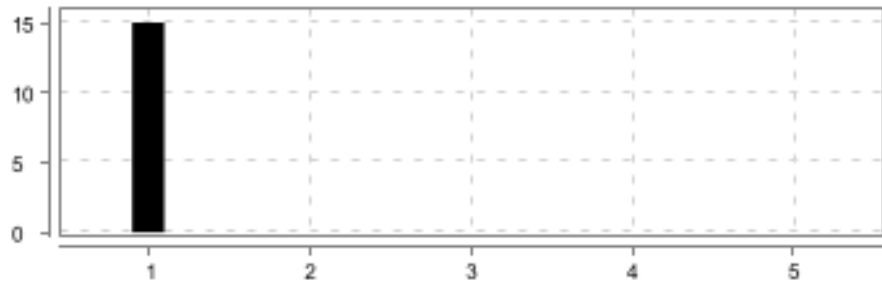

Form Page Data Table List<List<>>

<div>FAILED</div>	<div>DURATION - 3.269 s</div>	<div></div>	<div>Steps</div> <div>Total - 2</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 0</div>	<div></div>
<div>/ 1:40:28.380 AM // 1:40:31.649 AM /</div>				
<div>Parallel Run Task</div>				
<div>@Task_37</div>				

#	Step / Hook Details	Status	Duration									
1	Given user goes to home page	PASSED	3.215 s									
2	When user enters username ,user enters password ,user enters comment	FAILED	0.016 s									
	<table><tr><td>john_doe</td><td>John.123</td><td>Hello I am John</td></tr><tr><td>ali_can</td><td>Ali.123</td><td>Hello I am Ali</td></tr><tr><td>ayse_han</td><td>Ayse.123</td><td>Hello I am Ayse</td></tr></table> <p>io.cucumber.core.exception.CucumberException: Step [user enters username ,user enters password ,user enters comment] is defined with 0 parameters at 'StepDefinitions.ParallelStepDefinitions.userEntersUsernameUserEntersPasswordUserEntersComment()'. However, the gherkin step has 1 arguments: * Table: john_doe John.123 Hello I am John ali_can Ali.123 Hello I am Ali ayse_han Ayse.123 Hello I am Ayse Step text: user enters username ,user enters password ,user enters comment at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p>	john_doe	John.123	Hello I am John	ali_can	Ali.123	Hello I am Ali	ayse_han	Ayse.123	Hello I am Ayse		
john_doe	John.123	Hello I am John										
ali_can	Ali.123	Hello I am Ali										
ayse_han	Ayse.123	Hello I am Ayse										

#	Step / Hook Details	Status	Duration
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)		
	AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.85 (3f98d690ad7e..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:57515}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:57515/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at Utilities.Driver.getDriver(Driver.java:46) at StepDefinitions.Hooks.tearDown(Hooks.java:28)	FAILED	0.026 s

Positive Login

<div>FAILED</div>	<div>DURATION - 15.078 s</div>		<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
<div>/ 1:40:31.748 AM // 1:40:46.826 AM /</div>				
<div>Parallel Run Task</div>				
<div>@Task_37</div>				

#	Step / Hook Details	Status	Duration
1	<p>When users enters username "XYZ@hotmail.com"</p> <p>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"css selector","selector":"#email"} (Session info: chrome=121.0.6167.162) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [7586f9c5ae589bd44a70399213483656, findElement {using=id, value=email}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.85 (3f98d690ad7e..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:57530}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se.cdp: ws://localhost:57530/devtoo..., se.cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 7586f9c5ae589bd44a70399213483656</p> <p>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:66) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38)</p>	FAILED	15.043 s

#	Step / Hook Details	Status	Duration
	at jdk.proxy2/jdk.proxy2.\$Proxy25.sendKeys(Unknown Source) at StepDefinitions.ContactListParallelStepDefinitions.userEntersUsername(ContactListParallelStepDefinitions.java:62) at ?.users enters username "XYZ@hotmail.com"(file:///C:/Users/MONSTER/IdeaProjects/CucumberProject/src/test/Resources/Features/Task_37.feature:28) * Not displayable characters are replaced by '?'.		
2	And users enters password "Clarusway.123"	SKIPPED	0.005 s
3	And users clicks on submit button	SKIPPED	0.002 s
4	Then users validates sign in	SKIPPED	0.001 s
5	And users closes browser	SKIPPED	0.000 s
	AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.85 (3f98d690ad7e..., userDataDir: C:\Users\MONSTER\AppData\Lo...), fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:57515}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:57515/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at Utilities.Driver.getDriver(Driver.java:46) at StepDefinitions.Hooks.tearDown(Hooks.java:28)	FAILED	0.004 s