

# Cucumber Report

Feb 16, 2024, 2:07:28 AM

Start : Feb 16, 2:06:46.024 AM

End : Feb 16, 2:07:25.518 AM

Duration : 39.494 s

Features

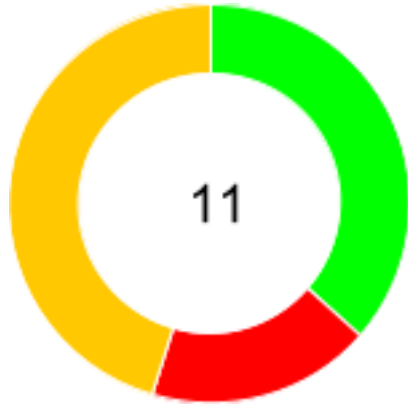
Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 1  
FAILED - 2  
SKIPPED - 0

PASSED - 4  
FAILED - 2  
SKIPPED - 5

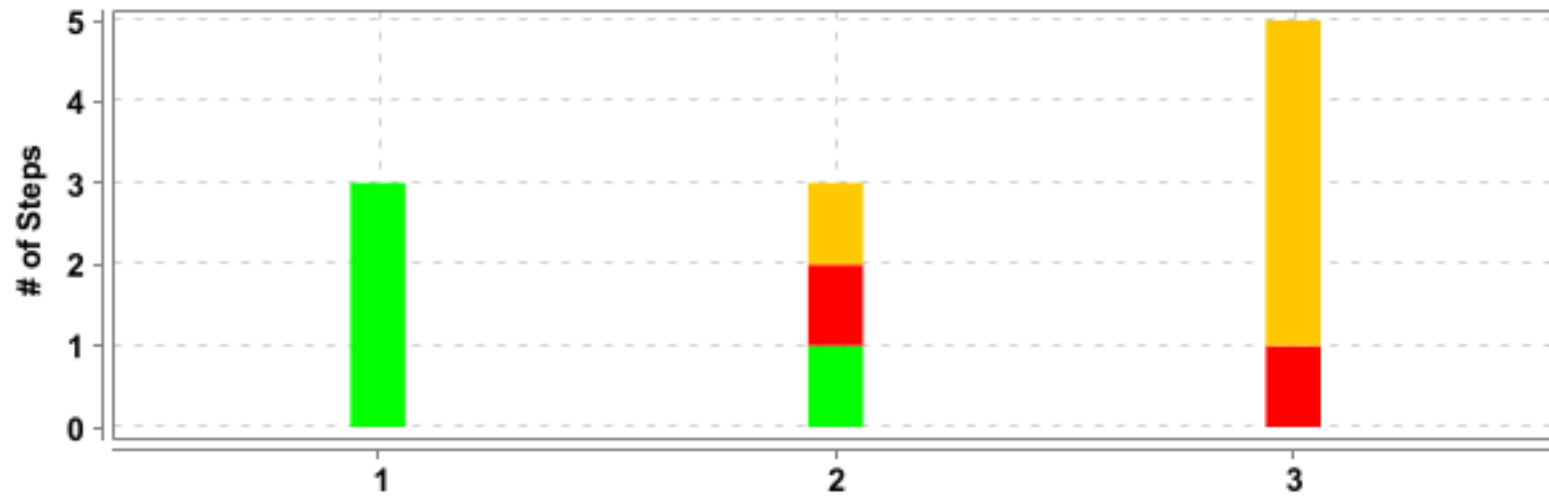


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Parallel Run Task</u>	39.494 s	3	1	2	0	11	4	2	5

<b>Tag</b>	<b>Scenario</b>				<b>Feature</b>			
<b>Name</b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>	<b><i>T</i></b>	<b><i>P</i></b>	<b><i>F</i></b>	<b><i>S</i></b>
@ParallelTestRun	3	1	2	0	1	0	1	0
@Task_37	3	1	2	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	<u>Parallel Run Task</u>	3	1	2	0	39.494 s

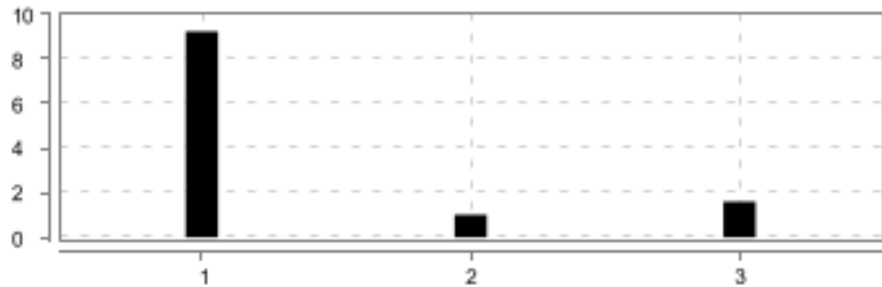



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Parallel Run Task</u>	<u>Todo List Data Table</u>	3	3	0	0	19.839 s
2	<u>Parallel Run Task</u>	<u>Form Page Data Table List&lt;List&lt;&gt;&gt;</u>	3	1	1	1	4.250 s
3	<u>Parallel Run Task</u>	<u>Positive Login</u>	5	0	1	4	15.137 s

## Parallel Run Task

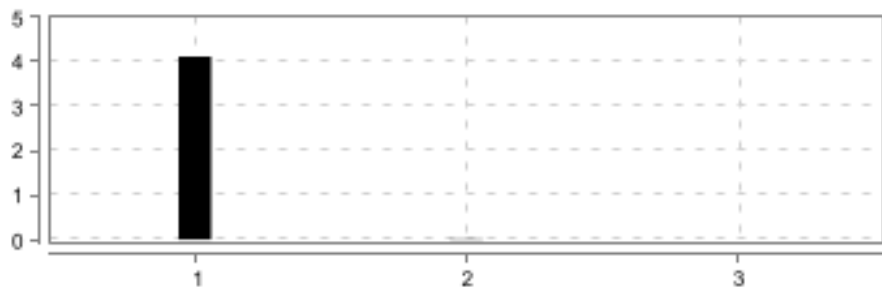

<b>FAILED</b>	<b>DURATION - 39.494 s</b>	Scenarios		Steps	
/ 2:06:46.024 AM // 2:07:25.518 AM /		Total - 3		Total - 11	
		Pass - 1		Pass - 4	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 5	

## Todo List Data Table

<div>PASSED</div>	<div>DURATION - 19.839 s</div>	<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 3</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 2:06:46.041 AM // 2:07:05.880 AM /</div>				
<div>Parallel Run Task</div>				
<div>@ParallelTestRun @Task_37</div>				

#	Step / Hook Details	Status	Duration
1	Given goes to "http://webdriveruniversity.com/To-Do-List/index.html"	PASSED	9.225 s
2	When enters todos	PASSED	1.006 s
	Prepare breakfast		
	Wash the dishes		
	Take care of baby		
	Help your kid's homework		
	Study Selenium		
	Sleep		
3	Then users closes browser	PASSED	1.601 s

## Form Page Data Table List<List<>>

<div>FAILED</div> <div>DURATION - 4.250 s</div>		<div></div>	<div>Steps</div> <div>Total - 3</div> <div>Pass - 1</div> <div>Fail - 1</div> <div>Skip - 1</div>	<div></div>
<div>/ 2:07:05.975 AM // 2:07:10.225 AM /</div>				
<div>Parallel Run Task</div>				
<div>@ParallelTestRun @Task_37</div>				

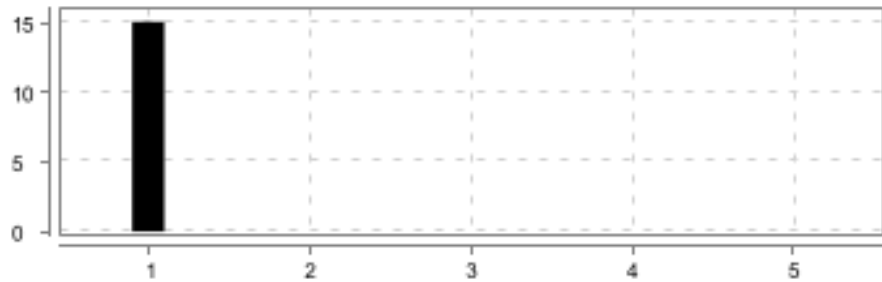

#	Step / Hook Details	Status	Duration									
1	Given user goes to home page	PASSED	4.116 s									
2	When user enters username ,user enters password ,user enters comment	FAILED	0.015 s									
	<table><tr><td>john_doe</td><td>John.123</td><td>Hello I am John</td></tr><tr><td>ali_can</td><td>Ali.123</td><td>Hello I am Ali</td></tr><tr><td>ayse_han</td><td>Ayse.123</td><td>Hello I am Ayse</td></tr></table> <p>io.cucumber.core.exception.CucumberException: Step [user enters username ,user enters password ,user enters comment] is defined with 0 parameters at 'StepDefinitions.ParallelStepDefinitions.userEntersUsernameUserEntersPasswordUserEntersComment()'. However, the gherkin step has 1 arguments: * Table:   john_doe   John.123   Hello I am John     ali_can   Ali.123   Hello I am Ali     ayse_han   Ayse.123   Hello I am Ayse   Step text: user enters username ,user enters password ,user enters comment at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)</p>	john_doe	John.123	Hello I am John	ali_can	Ali.123	Hello I am Ali	ayse_han	Ayse.123	Hello I am Ayse		
john_doe	John.123	Hello I am John										
ali_can	Ali.123	Hello I am Ali										
ayse_han	Ayse.123	Hello I am Ayse										

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) </pre>		
3	Then users closes browser	SKIPPED	0.003 s
	<p>AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)</p> <pre> org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.85 (3f98d690ad7e..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:57807}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:57807/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at Utilities.Driver.getDriver(Driver.java:46) </pre>	FAILED	0.094 s



#	Step / Hook Details	Status	Duration
	at StepDefinitions.Hooks.tearDown(Hooks.java:28)		

## Positive Login

<div>FAILED</div> <div>DURATION - 15.137 s</div>			<div>Steps</div> <div>Total - 5</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 4</div>	
/ 2:07:10.381 AM // 2:07:25.518 AM /				
Parallel Run Task				
@ParallelTestRun @Task_37				

#	Step / Hook Details	Status	Duration
1	<p>When users enters username "XYZ@hotmail.com"</p> <p>org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"css selector","selector":"#email"} (Session info: chrome=121.0.6167.162) For documentation on this error, please visit: <a href="https://www.selenium.dev/documentation/webdriver/troubleshooting/errors/#no-such-element-exception">https://www.selenium.dev/documentation/webdriver/troubleshooting/errors/#no-such-element-exception</a> Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [97265d9ca3f9567e64fdee5e1589ae7a, findElement {using=id, value=email}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.85 (3f98d690ad7e..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:57823}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:57823/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 97265d9ca3f9567e64fdee5e1589ae7a</p> <p>at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)            at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)            at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)            at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)            at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)            at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52)            at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191)            at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)            at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)            at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523)            at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165)            at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:66)            at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:360)</p>	<b>FAILED</b>	15.083 s

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:354) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy25.sendKeys(Unknown Source) at StepDefinitions.ContactListParallelStepDefinitions.userEntersUsername(ContactListParallelStepDefinitions.java:62) at ?.users enters username "XYZ@hotmail.com"(file:///C:/Users/MONSTER/IdeaProjects/CucumberProject/src/test/Resources/Features/Task_37.feature:30) * Not displayable characters are replaced by '?'.		
2	And users enters password "Clarusway.123"	SKIPPED	0.002 s
3	And users clicks on submit button	SKIPPED	0.003 s
4	And users validates sign in	SKIPPED	0.000 s
5	Then users closes browser	SKIPPED	0.001 s
	AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.85 (3f98d690ad7e..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:57807}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:57807/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at Utilities.Driver.getDriver(Driver.java:46) at StepDefinitions.Hooks.tearDown(Hooks.java:28)	FAILED	0.006 s