

# Cucumber Report

Feb 15, 2024, 5:46:16 PM

Start : Feb 15, 5:45:58.063 PM

End : Feb 15, 5:46:15.168 PM

Duration : 17.105 s

Features

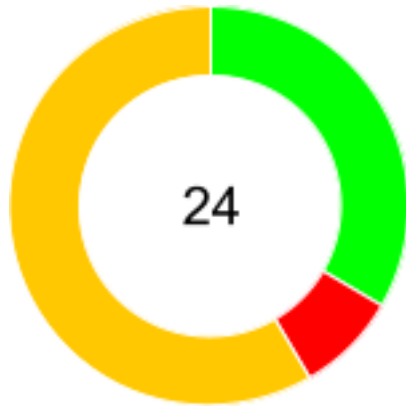
Scenarios

Steps

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 1  
FAILED - 2  
SKIPPED - 0

PASSED - 8  
FAILED - 2  
SKIPPED - 14

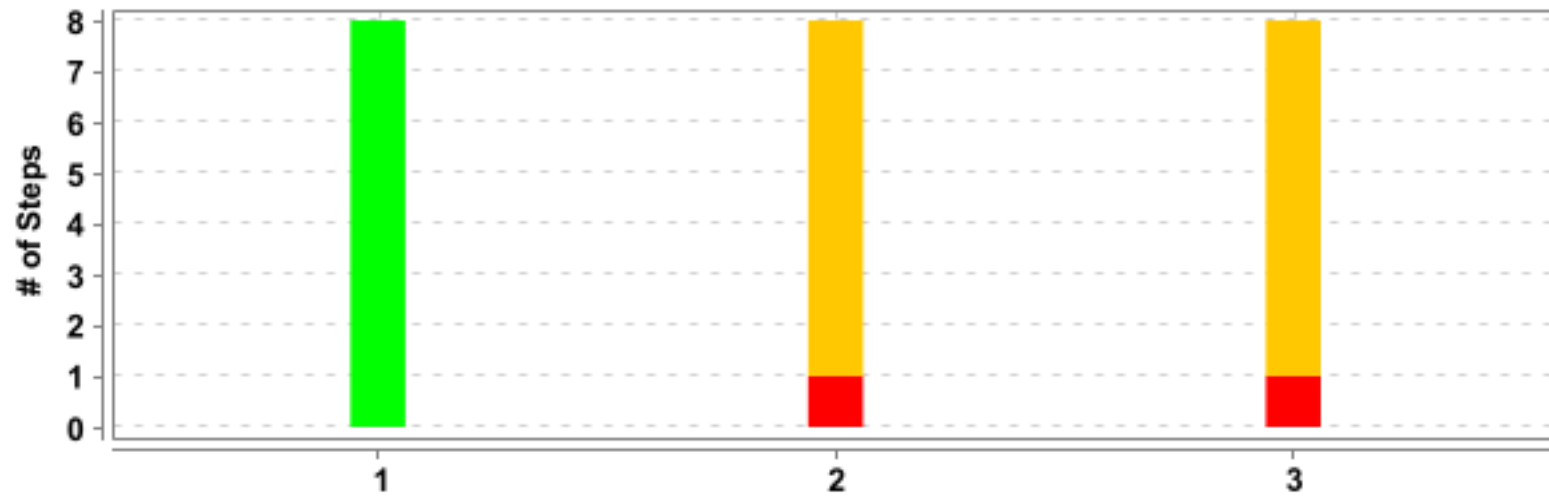


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Login Test</u>	17.105 s	3	1	2	0	24	8	2	14

Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Task_35	3	1	2	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	Login Test	3	1	2	0	17.105 s

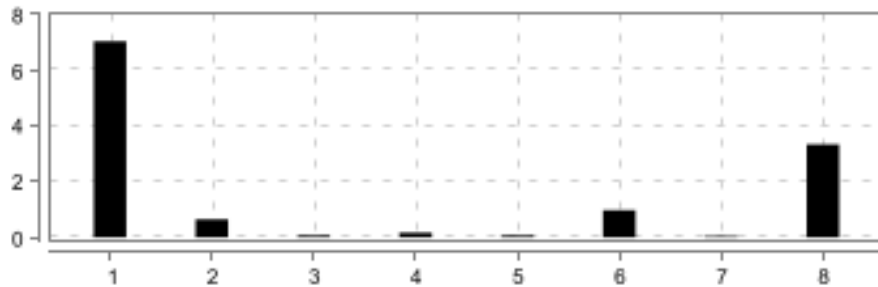



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login Test	Form Test	8	8	0	0	16.901 s
2	Login Test	Form Test	8	0	1	7	0.052 s
3	Login Test	Form Test	8	0	1	7	0.031 s

## Login Test

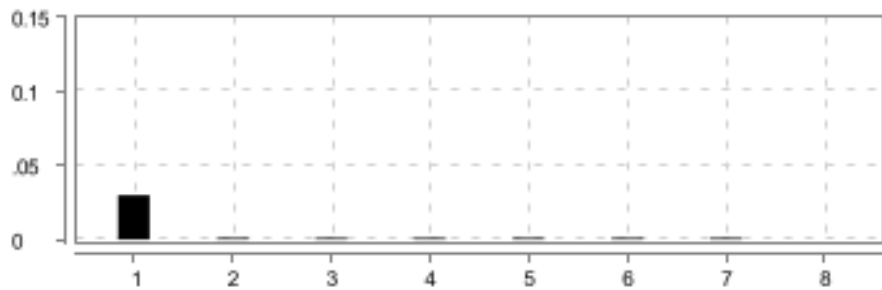

<b>FAILED</b>	DURATION - 17.105 s	Scenarios		Steps	
/ 5:45:58.063 PM // 5:46:15.168 PM /		Total - 3		Total - 24	
		Pass - 1		Pass - 8	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 14	

## Form Test

<div>PASSED</div>	<div>DURATION - 16.901 s</div>	<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 8</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 5:45:58.082 PM // 5:46:14.983 PM /</div>				
<div>Login Test</div>				
<div>@Task_35</div>				

#	Step / Hook Details	Status	Duration
1	Given user goes to page	PASSED	7.029 s
2	When enter firstname "ayse" and lastname "birincilerden"	PASSED	0.650 s
3	And enter age "21"	PASSED	0.065 s
4	And select country "Turkey"	PASSED	0.166 s
5	And enter note "ayse birinci"	PASSED	0.068 s
6	And click send button	PASSED	0.970 s
7	And user validates submission	PASSED	0.047 s
8	Then user quits browser	PASSED	3.330 s

## Form Test

<div>FAILED</div> <div>DURATION - 0.052 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	<div></div>
/ 5:46:15.041 PM // 5:46:15.093 PM /				
Login Test				
@Task_35				

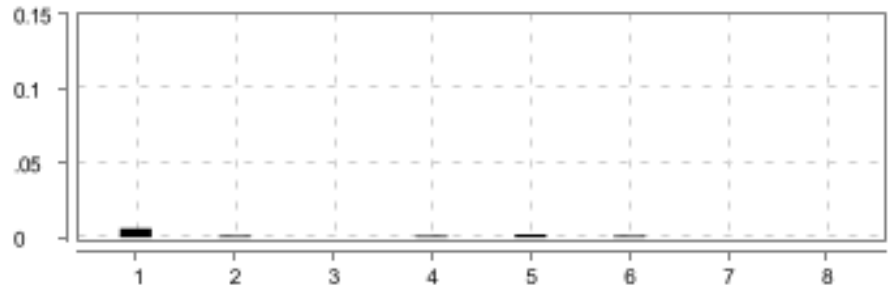

#	Step / Hook Details	Status	Duration
1	<p>Given user goes to page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class StepDefinitions.Task_35StepDefinitions  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)  at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)  at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)  at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)  at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)  at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)  at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)  at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)  at io.cucumber.core.runner.TestStep.run(TestStep.java:56)  at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)  at io.cucumber.core.runner.TestCase.run(TestCase.java:84)  at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)  at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)  at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)  at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)  at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)  at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.030 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)  at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)  at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)  at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)  at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)  at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)  at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)  at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)  at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)  at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)  at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)  at org.junit.runners.ParentRunner.run(ParentRunner.java:413)  at org.junit.runner.JUnitCore.run(JUnitCore.java:137)  at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69)  at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38)  at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11)  at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)  at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232)  at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)  Caused by: java.lang.reflect.InvocationTargetException  at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74)  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)  at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)  ... 46 more Caused by: org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51289}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51289/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523)  at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938)  at Utilities.Driver.getDriver(Driver.java:48)  at Pages.Task_35InputPage.&lt;init&gt;(Task_35InputPage.java:10)  at StepDefinitions.Task_35StepDefinitions.&lt;init&gt;(Task_35StepDefinitions.java:16) </p>		



#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When enter firstname "fatma" and lastname "ikincilerden"	SKIPPED	0.001 s
3	And enter age "32"	SKIPPED	0.001 s
4	And select country "Turkey"	SKIPPED	0.001 s
5	And enter note "fatma ikinci"	SKIPPED	0.001 s
6	And click send button	SKIPPED	0.001 s
7	And user validates submission	SKIPPED	0.001 s
8	Then user quits browser	SKIPPED	0.000 s
	AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.006 s
	<p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51289}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51289/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152)  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523)  at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938)  at Utilities.Driver.getDriver(Driver.java:48)  at StepDefinitions.Hooks.tearDown(Hooks.java:28)</p>		

## Form Test

FAILED		DURATION - 0.031 s			Steps Total - 8 Pass - 0 Fail - 1 Skip - 7			
/ 5:46:15.137 PM // 5:46:15.168 PM /								
Login Test								
@Task_35								

#	Step / Hook Details	Status	Duration
1	<p>Given user goes to page</p> <pre> io.cucumber.core.exception.CucumberException: Failed to instantiate class StepDefinitions.Task_35StepDefinitions   at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)   at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)   at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)   at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)   at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)   at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)   at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)   at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)   at io.cucumber.core.runner.TestStep.run(TestStep.java:56)   at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)   at io.cucumber.core.runner.TestCase.run(TestCase.java:84)   at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)   at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)   at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)   at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)   at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)   at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)   at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)   at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)   at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)   at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)   at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)   at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)   at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)   at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)   at org.junit.runners.ParentRunner.run(ParentRunner.java:413)   at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)   at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)   at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)   at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)   at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)   at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)   at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)   at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)   at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)   at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)   at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)   at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) </pre>	FAILED	0.006 s

#	Step / Hook Details	Status	Duration
	<pre> at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 46 more Caused by: org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51289}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51289/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at Utilities.Driver.getDriver(Driver.java:48) at Pages.Task_35InputPage.&lt;init&gt;(Task_35InputPage.java:10) at StepDefinitions.Task_35StepDefinitions.&lt;init&gt;(Task_35StepDefinitions.java:16) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) </pre>		
2	When enter firstname "hayriye" and lastname "ucunculerden"	SKIPPED	0.001 s
3	And enter age "43"	SKIPPED	0.000 s
4	And select country "Turkey"	SKIPPED	0.001 s
5	And enter note "hayriye ucuncu"	SKIPPED	0.002 s
6	And click send button	SKIPPED	0.001 s
7	And user validates submission	SKIPPED	0.000 s
8	Then user quits browser	SKIPPED	0.000 s
	AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.003 s

#	Step / Hook Details	Status	Duration
	<p>org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, setTimeout {implicit=10000}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51289}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51289/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}</p> <p>at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteTimeouts.implicitlyWait(RemoteWebDriver.java:938) at Utilities.Driver.getDriver(Driver.java:48) at StepDefinitions.Hooks.tearDown(Hooks.java:28)</p>		