

Cucumber Report

Feb 15, 2024, 5:44:52 PM

Start : Feb 15, 5:44:38.450 PM

End : Feb 15, 5:44:51.045 PM

Duration : 12.595 s

Features

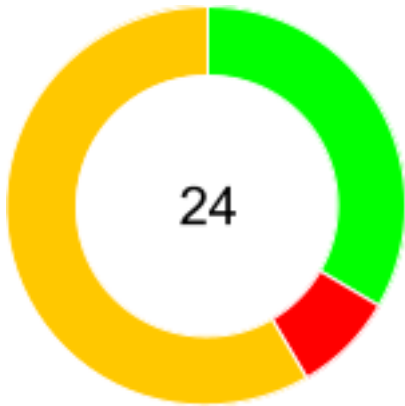
Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 1
FAILED - 2
SKIPPED - 0

PASSED - 8
FAILED - 2
SKIPPED - 14

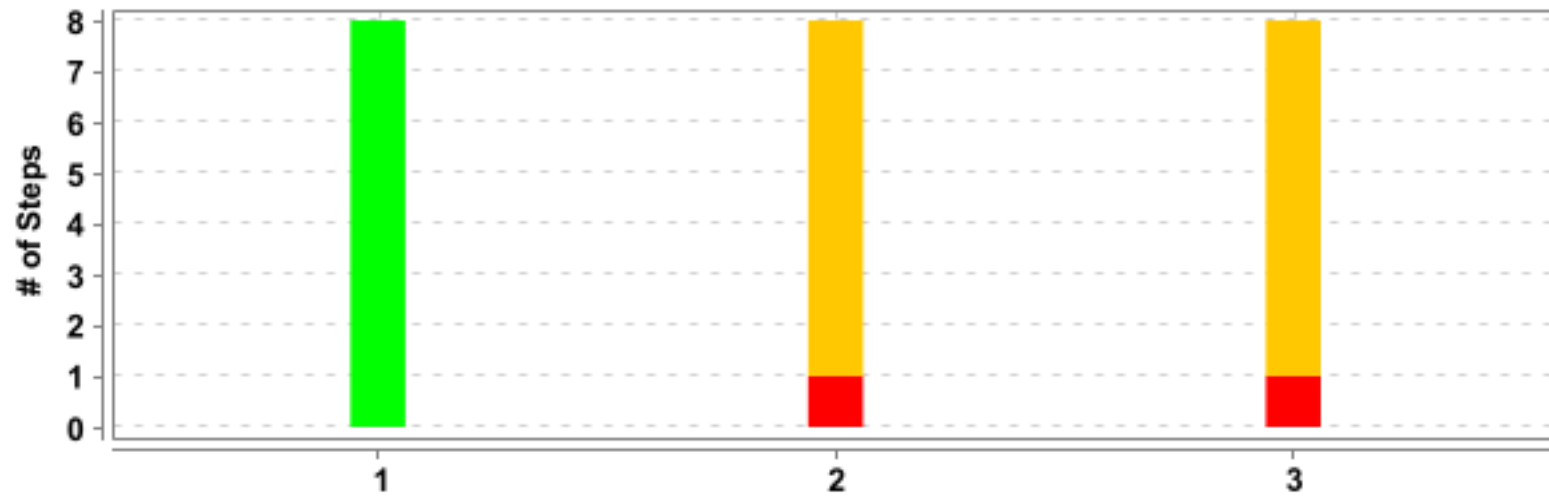


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Login Test</u>	12.595 s	3	1	2	0	24	8	2	14

Tag	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Task_35	3	1	2	0	1	0	1	0





#	Feature Name	T	P	F	S	Duration
1	Login Test	3	1	2	0	12.595 s

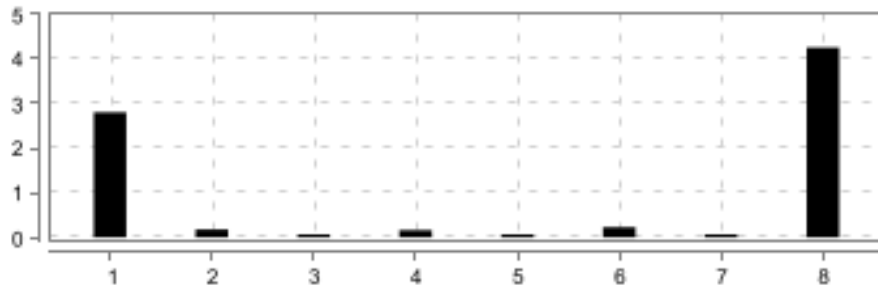



#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Login Test</u>	<u>Form Test</u>	8	8	0	0	12.395 s
2	<u>Login Test</u>	<u>Form Test</u>	8	0	1	7	0.068 s
3	<u>Login Test</u>	<u>Form Test</u>	8	0	1	7	0.026 s

Login Test

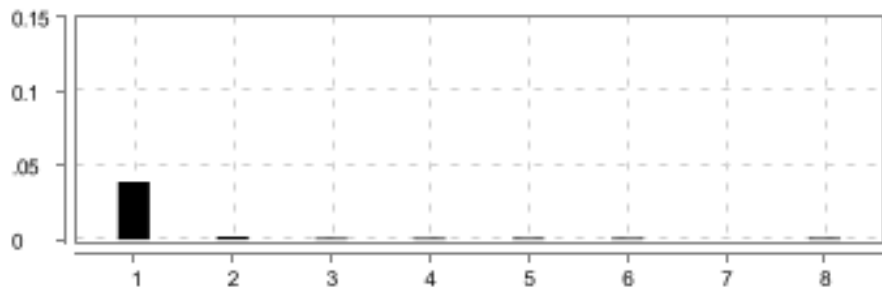

FAILED	DURATION - 12.595 s	Scenarios		Steps	
/ 5:44:38.450 PM // 5:44:51.045 PM /		Total - 3		Total - 24	
		Pass - 1		Pass - 8	
		Fail - 2		Fail - 2	
		Skip - 0		Skip - 14	

Form Test

<div>PASSED</div> <div>DURATION - 12.395 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 8</div> <div>Fail - 0</div> <div>Skip - 0</div>	<div></div>
<div>/ 5:44:38.465 PM // 5:44:50.860 PM /</div>				
<div>Login Test</div>				
<div>@Task_35</div>				

#	Step / Hook Details	Status	Duration
1	Given user goes to page	PASSED	2.802 s
2	When enter firstname "ayse" and lastname "birincilerden"	PASSED	0.176 s
3	And enter age "21"	PASSED	0.068 s
4	And select country "Turkey"	PASSED	0.160 s
5	And enter note "ayse birinci"	PASSED	0.068 s
6	And click send button	PASSED	0.230 s
7	And user validates submission	PASSED	0.063 s
8	Then user quits browser	PASSED	4.254 s

Form Test

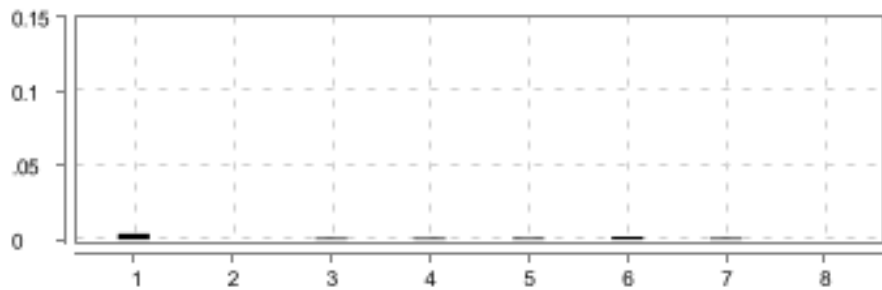

<div>FAILED</div> <div>DURATION - 0.068 s</div>		<div></div>	<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	<div></div>
<div>/ 5:44:50.911 PM // 5:44:50.979 PM /</div>				
<div>Login Test</div>				
<div>@Task_35</div>				

#	Step / Hook Details	Status	Duration
1	<p>Given user goes to page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class StepDefinitions.Task_35StepDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.039 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 46 more Caused by: org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, maximizeCurrentWindow {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51229}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51229/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteWindow.maximize(RemoteWebDriver.java:1039) at Utilities.Driver.getDriver(Driver.java:45) </p>		

#	Step / Hook Details	Status	Duration
	at Pages.Task_35InputPage.<init>(Task_35InputPage.java:10) at StepDefinitions.Task_35StepDefinitions.<init>(Task_35StepDefinitions.java:16) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When enter firstname "fatma" and lastname "ikincilerden"	SKIPPED	0.002 s
3	And enter age "32"	SKIPPED	0.001 s
4	And select country "Turkey"	SKIPPED	0.001 s
5	And enter note "fatma ikinci"	SKIPPED	0.001 s
6	And click send button	SKIPPED	0.001 s
7	And user validates submission	SKIPPED	0.000 s
8	Then user quits browser	SKIPPED	0.001 s
	AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, maximizeCurrentWindow {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51229}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51229/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteWindow.maximize(RemoteWebDriver.java:1039) at Utilities.Driver.getDriver(Driver.java:45) at StepDefinitions.Hooks.tearDown(Hooks.java:28)	FAILED	0.005 s

Form Test

<div>FAILED</div> <div>DURATION - 0.026 s</div>			<div>Steps</div> <div>Total - 8</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 7</div>	
/ 5:44:51.019 PM // 5:44:51.045 PM /				
Login Test				
@Task_35				

#	Step / Hook Details	Status	Duration
1	<p>Given user goes to page</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class StepDefinitions.Task_35StepDefinitions at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67) at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)</p>	FAILED	0.004 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148) at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163) at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146) at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486) at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53) ... 46 more Caused by: org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, maximizeCurrentWindow {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51229}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51229/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteWindow.maximize(RemoteWebDriver.java:1039) at Utilities.Driver.getDriver(Driver.java:45) </p>		

#	Step / Hook Details	Status	Duration
	at Pages.Task_35InputPage.<init>(Task_35InputPage.java:10) at StepDefinitions.Task_35StepDefinitions.<init>(Task_35StepDefinitions.java:16) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When enter firstname "hayriye" and lastname "ucunculerden"	SKIPPED	0.000 s
3	And enter age "43"	SKIPPED	0.001 s
4	And select country "Turkey"	SKIPPED	0.001 s
5	And enter note "hayriye ucuncu"	SKIPPED	0.001 s
6	And click send button	SKIPPED	0.002 s
7	And user validates submission	SKIPPED	0.001 s
8	Then user quits browser	SKIPPED	0.000 s
	AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario) org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [null, maximizeCurrentWindow {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb..., userDataDir: C:\Users\MONSTER\AppData\Lo...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51229}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51229/devtoo..., se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteWindow.maximize(RemoteWebDriver.java:1039) at Utilities.Driver.getDriver(Driver.java:45) at StepDefinitions.Hooks.tearDown(Hooks.java:28)	FAILED	0.003 s