


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Login Test	11.695 s	3	1	2	0	24	8	2	14


Tag	Scenario				Fea	ture		
Name	T	P	F	S	Т	P	F	S
@Task_35	3	1	2	0	1	0	1	0

FEATURES SUMMARY

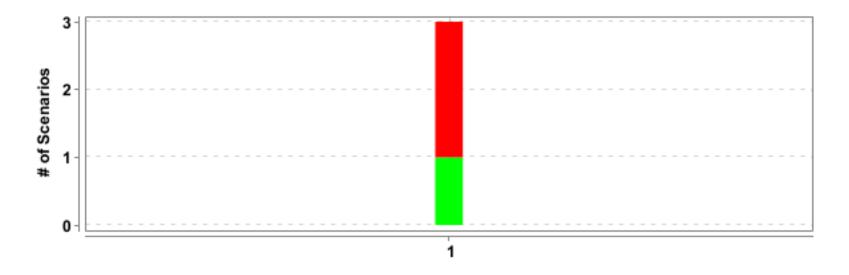

#	Feature Name	T	P	F	S	Duration
1	Login Test	3	1	2	0	11.695 s

SCENARIOS SUMMARY

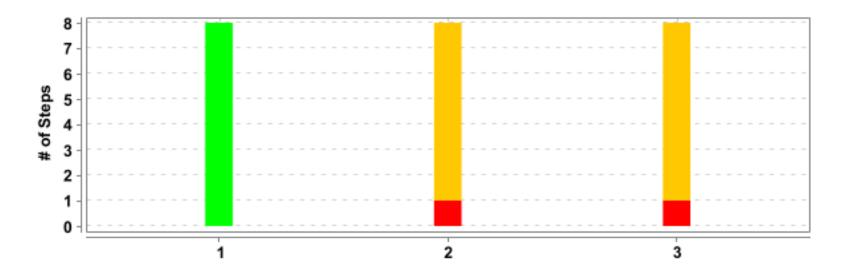


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Login Test	Form Test	8	8	0	0	11.501 s
2	Login Test	Form Test	8	0	1	7	0.057 s
3	Login Test	Form Test	8	0	1	7	0.032 s

DETAILED SECTION -- 6 --

Login Test

FAILED	DURATION - 11.695 s	Scenarios		Steps	
		Total - 3		Total - 24	
/ 5:43:42.063 PM // 5	5:43:53.758 PM /	Pass - 1	3	Pass - 8	24
		Fail - 2	J J	Fail - 2	
		Skip - 0		Skip - 14	


Form Test

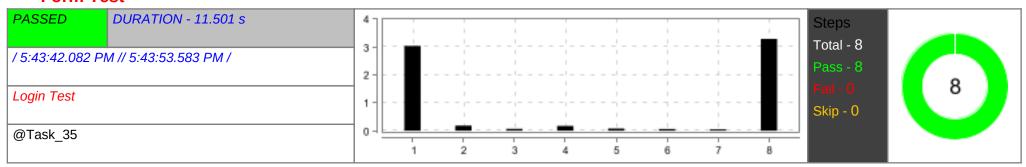

#	Step / Hook Details	Status	Duration
1	Given user goes to page	PASSED	3.037 s
2	When enter firstname "ayse" and lastname "birinci"	PASSED	0.184 s
3	And enter age "21"	PASSED	0.066 s
4	And select country "Turkey"	PASSED	0.169 s
5	And enter note "ayse birinci"	PASSED	0.076 s
6	And click send button	PASSED	0.060 s
7	And user validates submission	PASSED	0.048 s
8	Then user quits browser	PASSED	3.291 s

Form Test

DETAILED SECTION -- 7 --

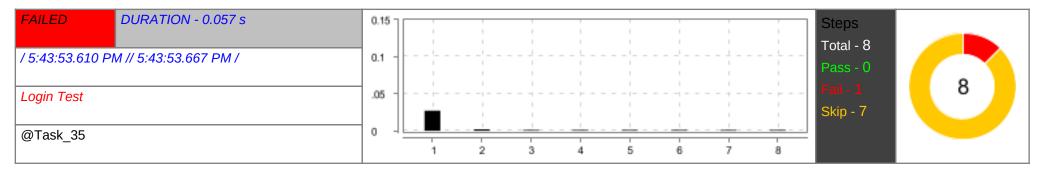

#	Step / Hook Details	Status	Duration
1	Given user goes to page	FAILED	0.027 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class StepDefinitions.Task_35StepDefinitions		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		


#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)		
	at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)		
	at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.junit.runner.JUnitCore.run(JUnitCore.java:137)		
	at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38)		
	at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)		
	at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232)		
	at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	46 more Caused by: org.openga.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info:		
	version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver		
	info: org.openqa.selenium.chrome.ChromeDriver Command: [null, maximizeCurrentWindow {}] Capabilities {acceptInsecureCerts: false,		
	browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb, userDataDir:		
	C:\Users\MONSTER\AppData\Lo}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51180},		
	networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51180/devtoo,		
	se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,		
	webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}		
	at org.openga.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152)		
	at org.openqa.selenium.remote.rntpcommandExecutor.execute(httpcommandExecutor.java.132) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.nrvokeExecute(DriverCommandExecutor.java:200)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:173)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java.525) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java.596)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java.596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java.600)		
	at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteWindow.maximize(RemoteWebDriver.java:1039)		
	at Utilities.Driver.getDriver(Driver.java:45)		

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
	at Pages.Task_35InputPage. <init>(Task_35InputPage.java:10)</init>		
	at StepDefinitions.Task_35StepDefinitions. <init>(Task_35StepDefinitions.java:16) at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)</init>		
		OLUBBER	0.000
2	When enter firstname "fatma" and lastname "ikinci"	SKIPPED	0.002 s
3	And enter age "32"	SKIPPED	0.001 s
4	And select country "Turkey"	SKIPPED	0.001 s
5	And enter note "fatma ikinci"	SKIPPED	0.001 s
6	And click send button	SKIPPED	0.001 s
7	And user validates submission	SKIPPED	0.001 s
8	Then user quits browser	SKIPPED	0.001 s
	AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.005 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium. chrome.ChromeDriver Command: [null, maximizeCurrentWindow {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb, userDataDir: C:\UserSiMONSTERIAppData\Lo}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51180}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51180/devtoo, se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:largeBlob: true, at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:1039) at Utilities.Driver.getDriver(Driver.java:45) at StepDefinitions.Hooks.tearDown(Hooks.java:28)		

Form Test

DETAILED SECTION -- 10 --

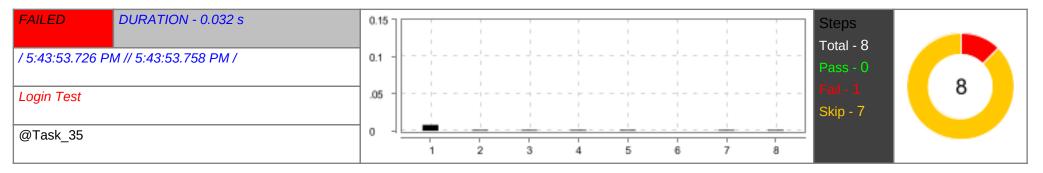

#	Step / Hook Details	Status	Duration
1	Given user goes to page	FAILED	0.008 s
	io.cucumber.core.exception.CucumberException: Failed to instantiate class StepDefinitions.Task_35StepDefinitions		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:67)		
	at io.cucumber.core.backend.DefaultObjectFactory.getInstance(DefaultObjectFactory.java:45)		
	at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47)		
	at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29)		
	at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66)		
	at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63)		
	at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10)		
	at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84)		
	at io.cucumber.core.runner.TestStep.run(TestStep.java:56)		
	at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51)		
	at io.cucumber.core.runner.TestCase.run(TestCase.java:84)		
	at io.cucumber.core.runner.Runner.runPickle(Runner.java:75)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:137)		
	at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:137)		
	at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144)		
	at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137)		
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196)		

DETAILED SECTION -- 11 --

#	Step / Hook Details	Status	Duration
	at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89)		
	at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331)		
	at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79)		
	at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329)		
	at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66)		
	at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293)		
	at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runFeatures\$6(CucumberExecutionContext.java:148)		
	at io.cucumber.core.runtime.CucumberExecutionContext.execute(CucumberExecutionContext.java:163)		
	at io.cucumber.core.runtime.CucumberExecutionContext.runFeatures(CucumberExecutionContext.java:146)		
	at io.cucumber.junit.Cucumber\$StartAndFinishTestRun.evaluate(Cucumber.java:226)		
	at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306)		
	at org.junit.runners.ParentRunner.run(ParentRunner.java:413)		
	at org.junit.runner.JUnitCore.run(JUnitCore.java:137)		
	at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38)		
	at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11)		
	at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35)		
	at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:232)		
	at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:55)		
	Caused by: java.lang.reflect.InvocationTargetException		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:74)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:502)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:486)		
	at io.cucumber.core.backend.DefaultObjectFactory.cacheNewInstance(DefaultObjectFactory.java:53)		
	46 more Caused by: org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info:		
	ersion: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver		
	nfo: org.openqa.selenium.chrome.ChromeDriver Command: [null, maximizeCurrentWindow {}] Capabilities {acceptInsecureCerts: false,		
	rowserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb, userDataDir:		
	C:\Users\MONSTER\AppData\Lo\}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51180},		
	etworkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51180/devtoo, e:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000},		
	inhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,		
	vebauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true}		
'	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600)		
	at org.openqa.selenium.remote.RemoteWebDriver\$RemoteWebDriverOptions\$RemoteWindow.maximize(RemoteWebDriver.java:1039)		
	at Utilities.Driver.getDriver.java:45)		

DETAILED SECTION -- 12 --

#	Step / Hook Details	Status	Duration
	at Pages.Task_35InputPage. <init>(Task_35InputPage.java:10)</init>		
	at StepDefinitions.Task_35StepDefinitions. <init>(Task_35StepDefinitions.java:16)</init>		
	at java.base/jdk.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62)		
2	When enter firstname "hayriye" and lastname "ucuncu"	SKIPPED	0.001 s
3	And enter age "43"	SKIPPED	0.001 s
4	And select country "Turkey"	SKIPPED	0.001 s
5	And enter note "hayriye ucuncu"	SKIPPED	0.001 s
6	And click send button	SKIPPED	0.000 s
7	And user validates submission	SKIPPED	0.001 s
8	Then user quits browser	SKIPPED	0.001 s
	AFTER - StepDefinitions.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.004 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.16.1', revision: '9b4c83354e' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.2' Driver info: org.openqa.selenium. chrome.ChromeDriver Command: [null, maximizeCurrentWindow {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 121.0.6167.162, chrome: {chromedriverVersion: 121.0.6167.184 (057a8ae7deb, userDataDir: C:UsersIMONSTERIAppData\Lo}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51180}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51180/devtoo, se:cdpVersion: 121.0.6167.162, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:reft true, webauthn:virtualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:152) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:523) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:600) at org.openqa.selenium.remote.RemoteWebDriver*RemoteWebDriverOptions*RemoteWindow.maximize(RemoteWebDriver.java:1039) at Utilities.Driver.getDriver(Driver.java:45) at StepDefinitions.Hooks.tearDown(Hooks.java:28)		