

ARTI 403 – Image Processing

STUDENT PROCEDURAL MANUAL – Lab 2

Name: Abdullah Alnaji

ID: 2240007157

Step#1: Import the libraries

```
In [1]: import cv2
import numpy as np
from PIL import Image
import matplotlib.pyplot as plt

def show(img, title=''):
    """Displays an image inside the notebook (PIL's .show() opens an
    external viewer and shows nothing in Jupyter)."""
    plt.figure(figsize=(4, 4))
    plt.imshow(np.asarray(img), cmap='gray', vmin=0, vmax=255)
    plt.title(title)
    plt.axis('off')
    plt.show()
```

Step#2: Define Functions

```
In [2]: def sample_image(image, factor):
    """
    Downsamples the image by the given factor.
    Args:
        image (numpy array): Original image.
        factor (int): Factor by which to downsample.
    Returns:
        numpy array: Downsampled image.
    """
    height, width = image.shape[:2]
    sampled_image = cv2.resize(image, (width // factor, height // factor),
                               interpolation=cv2.INTER_NEAREST)
    return sampled_image
```

```
In [3]: def quantize_image(image, levels):
    """
    Reduces the number of grayscale levels in the image.
    Args:
        image (numpy array): Original image.
        levels (int): Number of grayscale levels.
    Returns:
        numpy array: Quantized image.
    """
    quantized_image = np.floor(image / (256 // levels)) * (256 // levels)
    quantized_image = quantized_image.astype(np.uint8)
    return quantized_image
```

```
In [4]: def plot_images(original, sampled, quantized):
    """
    Plots the original, sampled, and quantized images side by side.
    Args:
        original (numpy array): Original image.
        sampled (numpy array): Sampled image.
        quantized (numpy array): Quantized image.
    """
    plt.figure(figsize=(12, 4))
    plt.subplot(1, 3, 1)
    plt.imshow(original, cmap='gray')
    plt.title('Original Image')
    plt.axis('off')
    plt.subplot(1, 3, 2)
    plt.imshow(sampled, cmap='gray')
    plt.title('Sampled Image')
```

```
plt.axis('off')
plt.subplot(1, 3, 3)
plt.imshow(quantized, cmap='gray')
plt.title('Quantized Image')
plt.axis('off')
plt.show()
```

Step#3: Import the image and set the parameters

```
In [5]: image_path = 'lena_gray_256.tif'
sampling_factor = 14
quantization_levels = 9

# Load image in grayscale
original_image = cv2.imread(image_path, cv2.IMREAD_GRAYSCALE)
if original_image is None:
    print(f"Error: Unable to load image at {image_path}")

# Sample and quantize
sampled_image = sample_image(original_image, sampling_factor)
quantized_image = quantize_image(original_image, quantization_levels)

# Plot results
plot_images(original_image, sampled_image, quantized_image)
```

Original Image



Sampled Image



Quantized Image



Arithmetic Operations

```
In [6]: img1 = Image.open('lena_gray_256.tif')
img2 = Image.open('cameraman.tif')

resize = (400, 400)
img1 = img1.resize(resize, Image.Resampling.LANCZOS)
img2 = img2.resize(resize, Image.Resampling.LANCZOS)

im1arr = np.asarray(img1)
im2arr = np.asarray(img2)

addition = im1arr + im2arr
show(addition, 'Addition')
```

Addition



Sets and Logical Operations

```
In [7]: def load_shape(path, size=(400, 400)):
        """Loads a PNG with transparency as a binary (0/255) image."""
        img = Image.open(path)
        mask = img.getchannel('A') if 'A' in img.mode else img.convert('L')
        mask = mask.resize(size, Image.Resampling.LANCZOS)
        return np.where(np.asarray(mask) > 127, 255, 0).astype(np.uint8)


        im3arr = load_shape('A.png')
        im4arr = load_shape('B.png')

        show(im3arr, 'A')
        show(im4arr, 'B')

        union = im4arr | im3arr
        show(union, 'Union (A | B)')
```

A



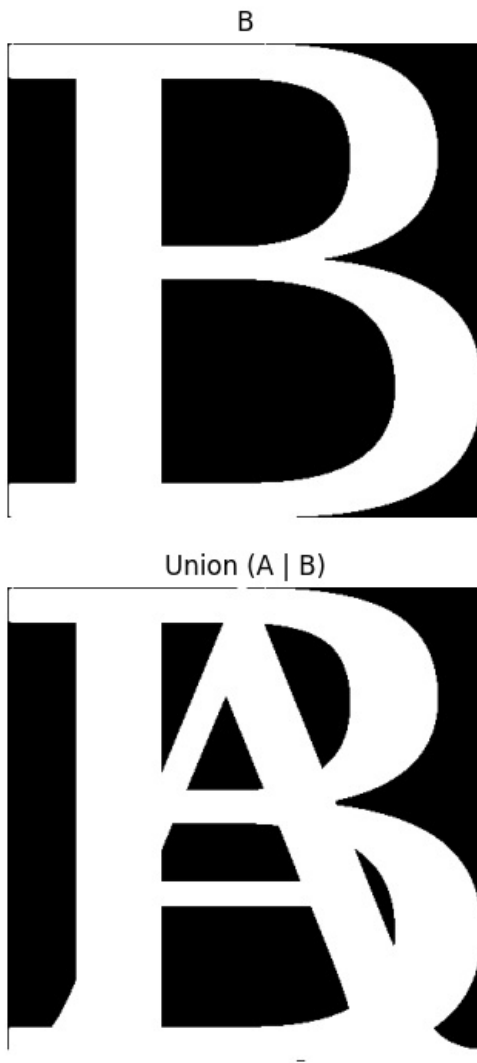

Tasks

Task#1: Change the sampling and quantization parameters and observe the effects

```
In [8]: image_path = 'lena_gray_256.tif'
original_image = cv2.imread(image_path, cv2.IMREAD_GRAYSCALE)

# Try different combinations of sampling factor and quantization levels
parameter_sets = [
    (2, 64),
    (4, 16),
    (8, 9),
    (14, 4),
    (20, 2),
```

```

]

for factor, levels in parameter_sets:
    sampled_image = sample_image(original_image, factor)
    quantized_image = quantize_image(original_image, levels)
    print(f"Sampling factor = {factor}, Quantization levels = {levels}")
    plot_images(original_image, sampled_image, quantized_image)

```

Sampling factor = 2, Quantization levels = 64

Original Image



Sampled Image



Quantized Image



Sampling factor = 4, Quantization levels = 16

Original Image



Sampled Image



Quantized Image



Sampling factor = 8, Quantization levels = 9

Original Image



Sampled Image



Quantized Image



Sampling factor = 14, Quantization levels = 4

Original Image




Sampled Image



Quantized Image



Sampling factor = 20, Quantization levels = 2

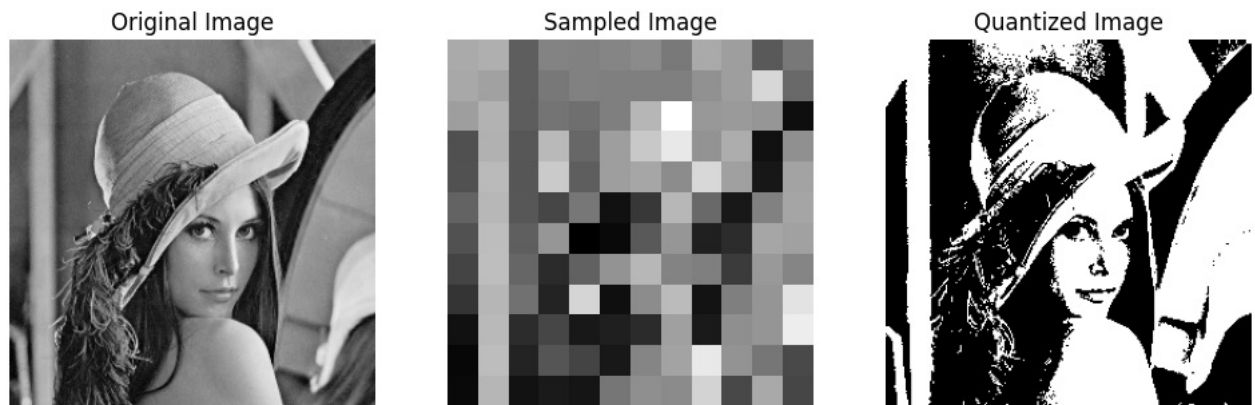

Task#2: Read two images, convert them into arrays, and perform the following operations on them

Read the two images and convert them into arrays

```
In [9]: img1 = Image.open('lena_gray_256.tif')
img2 = Image.open('cameraman.tif')

resize = (400, 400)
img1 = img1.resize(resize, Image.Resampling.LANCZOS)
img2 = img2.resize(resize, Image.Resampling.LANCZOS)

im1arr = np.asarray(img1)
im2arr = np.asarray(img2)
```

2.1 Subtract two images and display the result

```
In [10]: subtraction = im1arr - im2arr
show(subtraction, 'Subtraction')
```



2.2 Add one image with a constant value of 175 and display it

```
In [11]: constant_value = 175
addition_const = im1arr + constant_value
show(addition_const, 'Image + 175')
```

Image + 175



2.3 Apply the set difference operation on two Gray-Scale images

```
In [12]: set_difference = im1arr & ~im2arr  
show(set_difference, 'Set difference (A - B)')
```

Set difference (A - B)



2.4 Apply the symmetric difference operation on two Gray-Scale images

```
In [13]: symmetric_difference = im1arr ^ im2arr  
show(symmetric_difference, 'Symmetric difference (A XOR B)')
```

Symmetric difference (A XOR B)



2.5 Apply Intersection operations on two Gray-Scale images

```
In [14]: intersection = im1arr & im2arr  
show(intersection, 'Intersection (A AND B)')
```

Intersection (A AND B)

