

Address	
PK	<u>addressID(int, auto_increment)</u>
FK1	customerID(from customer table)
FK2	countryID(from countries table)
FK3	cityID(from cities table)
FK4	townID(from town table)
FK5	districtID(from district table)
	postalCode(varchar(15))
	addressText(varchar(500))

Cities	
PK	<u>cityID(int, auto_increment)</u> 
FK	countryID(from countries table) 
	cityName(varchar(100))

Countries	
PK	<u>countryID(int, auto_incremet)</u>
	countryName(varchar(75))

Credit Status	
PK	<u>statusID(int auto increment)</u>
	creditStatus(varchar(50))

Customers	
PK	<u>customerID(int, auto incremet)</u>
	customerName(varchar(50))
	customerSurname(varchar(50))
	email(varchar(50))
	gender(varchar(1))
	birthDate(DATE)
	phoneNumber(varchar(20))
FK	addresID(from Address table)

District	
PK	<u>districtID(int, auto increment)</u>
FK	townID(from town table)
	districtName(varchar(100))

Measure	
PK	<u>measureID(int, autoincrement)</u>
++	measureName(varchar(50))

Order Status	
PK	<u>statusID(int, auto increment)</u>
	orderStatus(varchar(25))


Orders		++
PK	<u>orderID(int auto increment)</u>	➤
FK1	customerID(from customers table)	++
FK2	productID(from product table)	
FK3	addressID(from address table)	➤
	orderDate(Date)	
	totalPrice(float)	
FK4	statusID(from order status table)	
	totalPrice(float)	


Payment Type	
PK	<u>paymentID(int auto increment)</u>
	type(varchar(25))

Product Categories	
PK	<u>categoryID(int, auto increment</u>
	categoryName(varchar(100))

Products	
PK	<u>productID(int, auto increment)</u>
	productName(varchar(100))
FK1	categoryID(from categories table)
FK2	supplierID(from suppliers table)
	price(int)
	stockAmount(int)
	reorderLevel(tiny int)
FK3	measureID(from measure table)

Purchases	
PK	<u>purchasesID(int, auto increment)</u>
	productID(from product table)
	supplierID(from suppliers table)
	purchasesDate(Date)
	quantityPurchases(int)
	unitPrice(float)
	totalPrice(float)

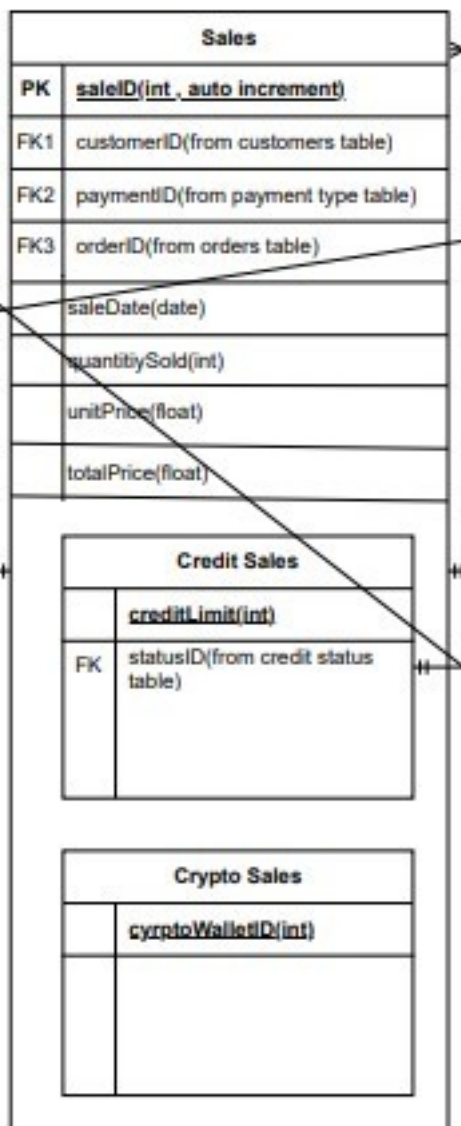

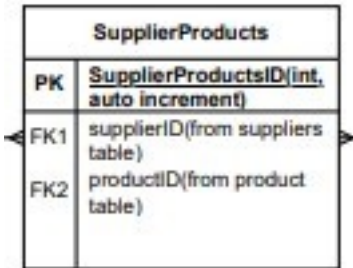

Suppliers	
PK	<u>supplierID(int, auto increment)</u>
	supplierName(varchar(100))
	phoneNumber(varchar(20))

Towns	
PK	<u>townID(int, auto increment)</u>
FK	cityID(from city table)
	townName(varchar(100))