


Lahore Garrison University

DHA Phase 6 Lahore



Student Name	Abdullah Khalid
Student Roll No	Fa23/BSCS/166
Section	E
Subject	Cloud Computing
Instructor Name	Sir Shahid Raza


1. AWS CLI Configuration:

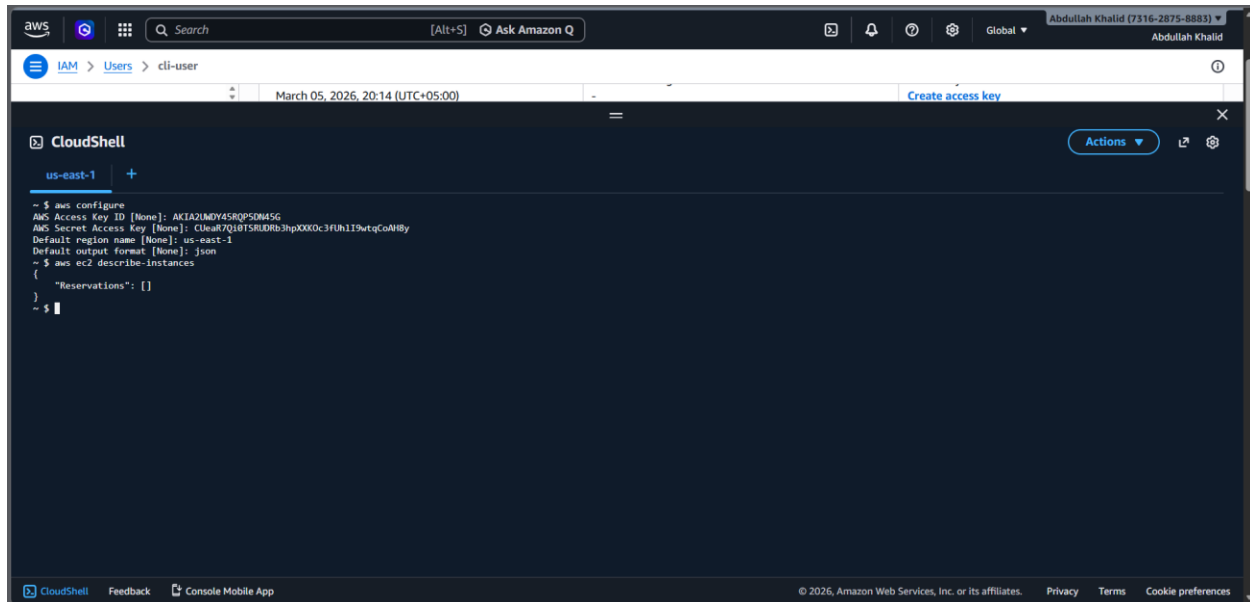

The screenshot shows the AWS CloudShell interface with the terminal output of the `aws configure` command. The configuration is successful, showing the Access Key ID, Secret Access Key, default region name (us-east-1), and default output format (json). The `aws ec2 describe-instances` command is also executed, returning an empty list of reservations.

```
~ $ aws configure
AWS Access Key ID [None]: AKIA2LMDY4SRQP5DM4SG
AWS Secret Access Key [None]: CQear7Q10TSRU0Rb3hpXXXXc3FUh1I9wtqCoAH8y
Default region name [None]: us-east-1
Default output format [None]: json
~ $ aws ec2 describe-instances
{
  "Reservations": []
}
~ $
```

2. S3 Bucket Creation & Listing Buckets:

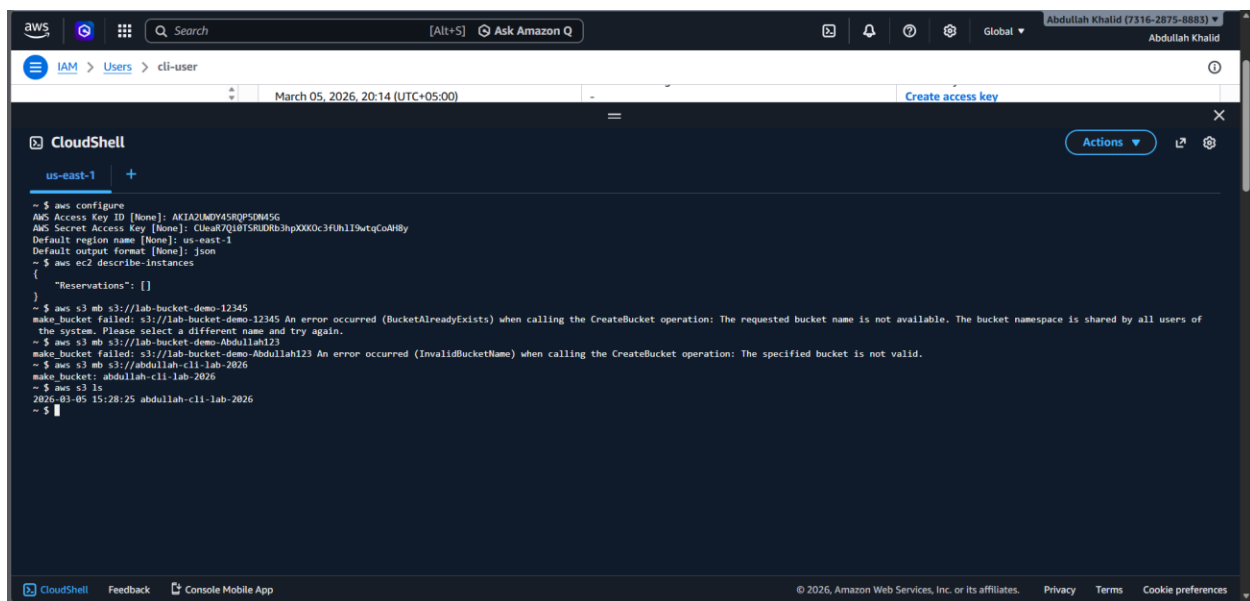

The screenshot shows the AWS CloudShell terminal with several commands related to S3 bucket creation and listing. The `aws s3 mb` command is used to create buckets. The first attempt fails with an error: `make_bucket: failed: s3://lab-bucket-demo-12345 An error occurred (BucketAlreadyExists) when calling the CreateBucket operation: The requested bucket name is not available. The bucket namespace is shared by all users of the system. Please select a different name and try again.` The second attempt also fails with an error: `make_bucket: failed: s3://lab-bucket-demo-Abdullah123 An error occurred (InvalidBucketName) when calling the CreateBucket operation: The specified bucket is not valid.` The third attempt is successful: `make_bucket: abdullah-cii-lab-2026`. Finally, the `aws s3 ls` command is used to list the buckets, showing the output: `2026-03-05 15:28:25 abdullah-cii-lab-2026`.

```
~ $ aws s3 mb s3://lab-bucket-demo-12345
make_bucket: failed: s3://lab-bucket-demo-12345 An error occurred (BucketAlreadyExists) when calling the CreateBucket operation: The requested bucket name is not available. The bucket namespace is shared by all users of the system. Please select a different name and try again.
~ $ aws s3 mb s3://lab-bucket-demo-Abdullah123
make_bucket: failed: s3://lab-bucket-demo-Abdullah123 An error occurred (InvalidBucketName) when calling the CreateBucket operation: The specified bucket is not valid.
~ $ aws s3 mb s3://abdullah-cii-lab-2026
make_bucket: abdullah-cii-lab-2026
~ $ aws s3 ls
2026-03-05 15:28:25 abdullah-cii-lab-2026
~ $
```


3. Removing Buckets:

```
~ $ aws configure
AWS Access Key ID [None]: AKIAZLMY5SRQPS0M456
AWS Secret Access Key [None]: CLeat7Q10TSRU0Rb3hpXX0c3fUk1l9wtqCoAH8y
Default region name [None]: us-east-1
Default output format [None]: json
~ $ aws ec2 describe-reservations
{
  "Reservations": []
}
~ $ aws s3 mb s3://lab-bucket-demo-12345
make_bucket failed: s3://lab-bucket-demo-12345 An error occurred (BucketAlreadyExists) when calling the CreateBucket operation: The requested bucket name is not available. The bucket namespace is shared by all users of the system. Please select a different name and try again.
~ $ aws s3 mb s3://lab-bucket-demo-Abdullah123
make_bucket failed: s3://lab-bucket-demo-Abdullah123 An error occurred (InvalidBucketName) when calling the CreateBucket operation: The specified bucket is not valid.
~ $ aws s3 mb s3://abdullah-cli-lab-2026
make_bucket: abdullah-cli-lab-2026
~ $ aws s3 ls
2026-03-05 15:28:25 abdullah-cli-lab-2026
~ $ aws s3 rb s3://abdullah-cli-lab-2026
remove_bucket: abdullah-cli-lab-2026
~ $
```

4. Creating an EC2 Instance Using AWS CLI:

```
~ $ aws ec2 run-instances \
> --image-id ami-0c02fb59596c7d316 \
> --count 1 \
> --instance-type t3.micro
{
  "ReservationId": "r-0e5ac333c33efe5fe",
  "OwnerId": "731628758883",
  "Groups": [],
  "Instances": [
    {
      "Architecture": "x86_64",
      "BlockDeviceMappings": [],
      "ClientToken": "13c22aa7-8rhd-4dbc-ba22-f87018dada80",
      "EbsOptimized": false,
      "EnaSupport": true,
      "Hypervisor": "xen",
      "NetworkInterfaces": [
        {
          "Attachment": {
            "AttachTime": "2026-03-05T15:36:45+00:00",
            "AttachmentId": "eni-attach-0e7281b14ce94f5d8",
            "DeleteOnTermination": true,
            "DeviceIndex": 0,
            "Status": "attaching",
            "NetworkCardIndex": 0
          },
          "Description": "",
          "Groups": [
            {
              "GroupId": "sg-0a93c1927ef8d42cd",
              "GroupName": "default"
            }
          ]
        }
      ]
    }
  ]
}
```

5. Listing an EC2 Instance:

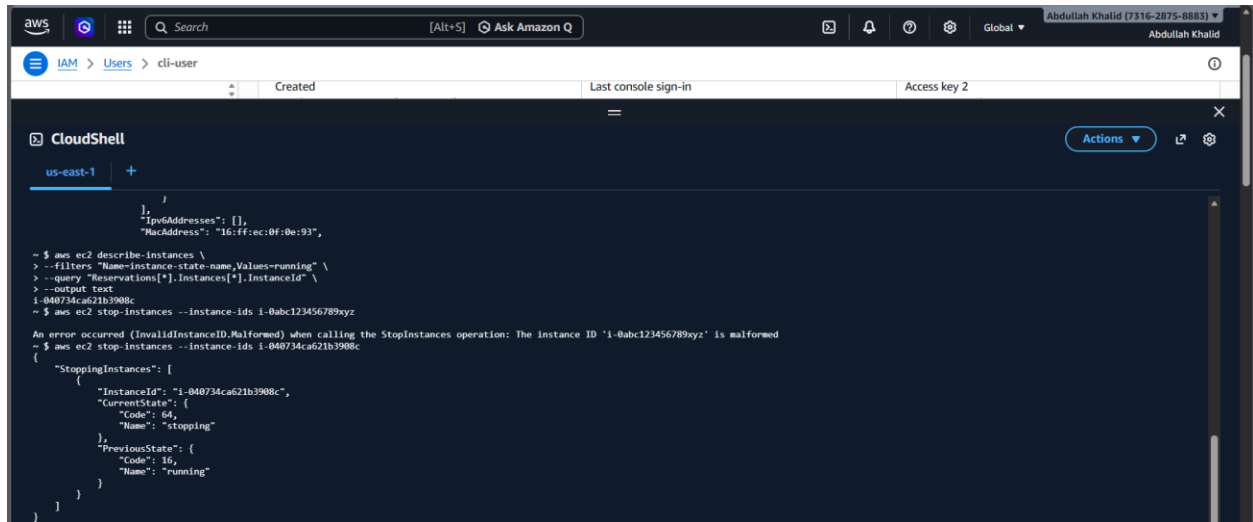


```
~$ aws ec2 describe-instances \
> --filters "Name=instance-state-name,Values=running" \
> --query "Reservations[*].Instances[*].InstanceId" \
> --output text
i-040734ca621b3908c

~$ aws ec2 stop-instances --instance-ids i-0abc123456789xyz

An error occurred (InvalidInstanceID.Malformed) when calling the StopInstances operation: The instance ID 'i-0abc123456789xyz' is malformed
~$ aws ec2 stop-instances --instance-ids i-040734ca621b3908c
{
  "StoppingInstances": [
    {
      "InstanceId": "i-040734ca621b3908c",
      "CurrentState": {
        "Code": 64,
        "Name": "stopping"
      },
      "PreviousState": {
        "Code": 16,
        "Name": "running"
      }
    }
  ]
}
```

6. Stopping an EC2 Instance:

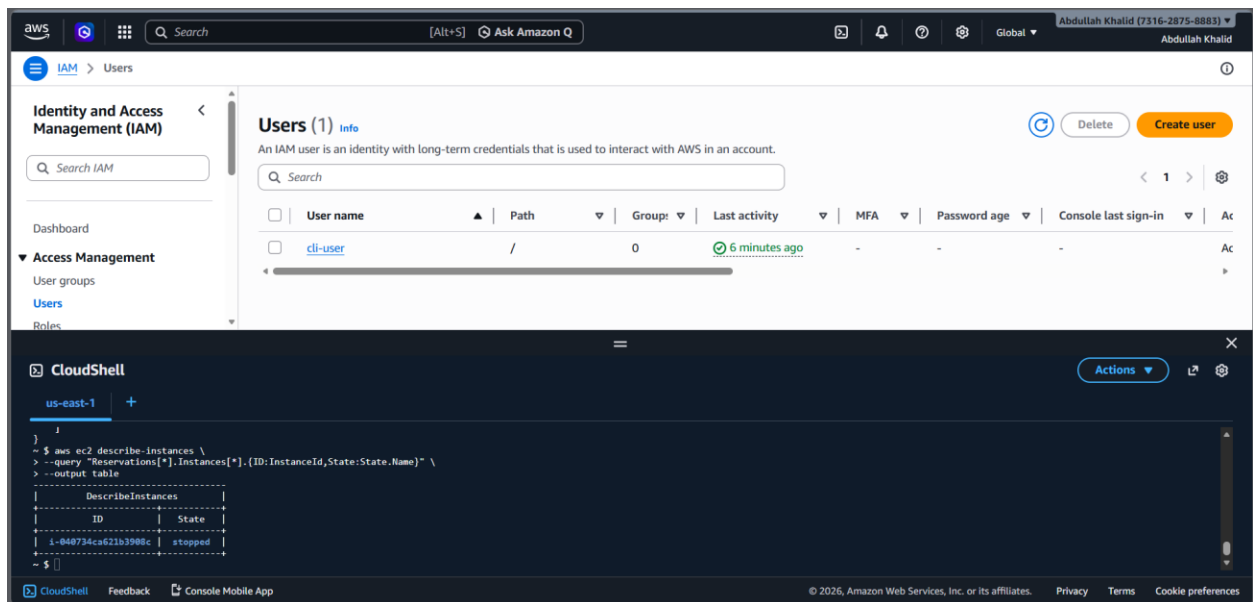

Identity and Access Management (IAM)

Users (1) info

An IAM user is an identity with long-term credentials that is used to interact with AWS in an account.

User name	Path	Group	Last activity	MFA	Password age	Console last sign-in	Ac
cli-user	/	0	6 minutes ago	-	-	-	Ac

CloudShell

```
~$ aws ec2 describe-instances \
> --query "Reservations[*].Instances[*].{ID:InstanceId,State:State.Name}" \
> --output table
+-----+-----+
| DescribeInstances |
+-----+-----+
| ID           | State |
+-----+-----+
| i-040734ca621b3908c | stopped |
+-----+-----+
~$
```