


# Chapter 3: Processes

---



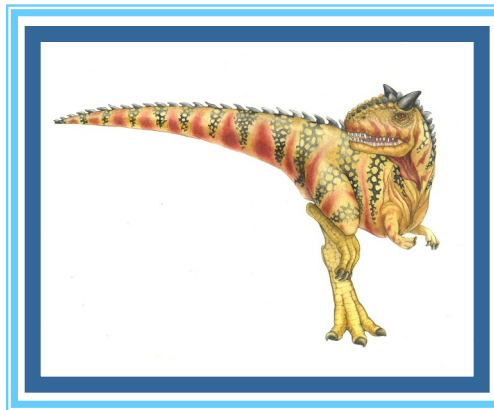

# Chapter 3: Processes

---

- Process Concept
- Process Scheduling
- Operations on Processes
- Interprocess Communication
- Examples of IPC Systems





# Process Concept

---

- **Process** – a program in execution; process execution must progress in sequential fashion
- A process has multiple parts
  - The program code, also called **text section**
  - Current activity including **program counter**, processor registers
  - **Stack** containing temporary data
    - 4 Function parameters, return addresses, local variables
  - **Data section** containing global variables
  - **Heap** containing memory dynamically allocated during run time





# Process Concept (Cont.)


---

- Program is **passive** entity stored on disk (**executable file**), process is **active**
  - Program becomes process when executable file loaded into memory
- Execution of program started via GUI mouse clicks, command line entry of its name, etc
- One program can be several processes
  - Consider multiple users executing the same program





# Process in Memory

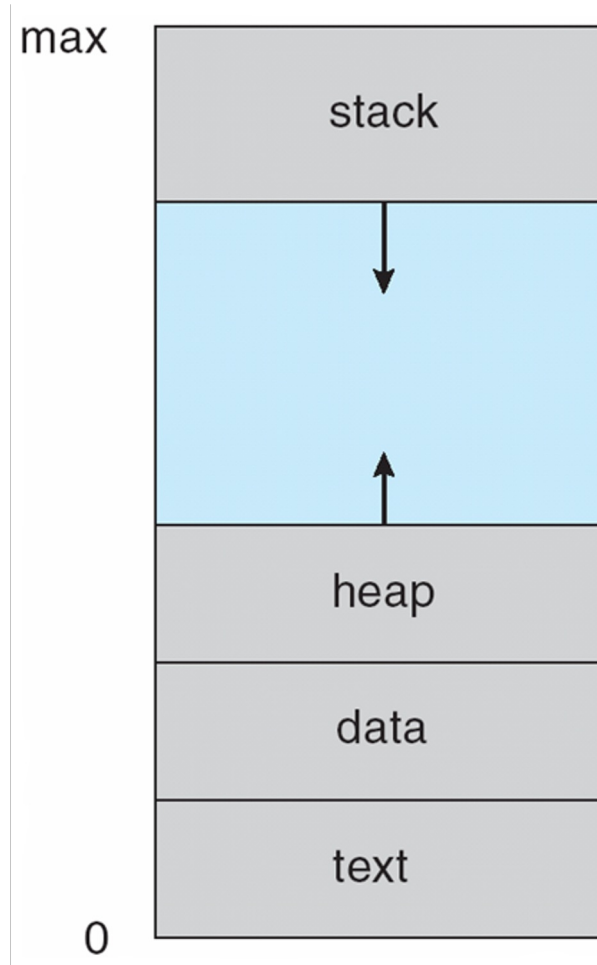



# Process State



---

- As a process executes, it changes **state**
  - **new**: The process is being created
  - **running**: Instructions are being executed
  - **waiting**: The process is waiting for some event to occur
  - **ready**: The process is waiting to be assigned to a processor
  - **terminated**: The process has finished execution





# Diagram of Process State

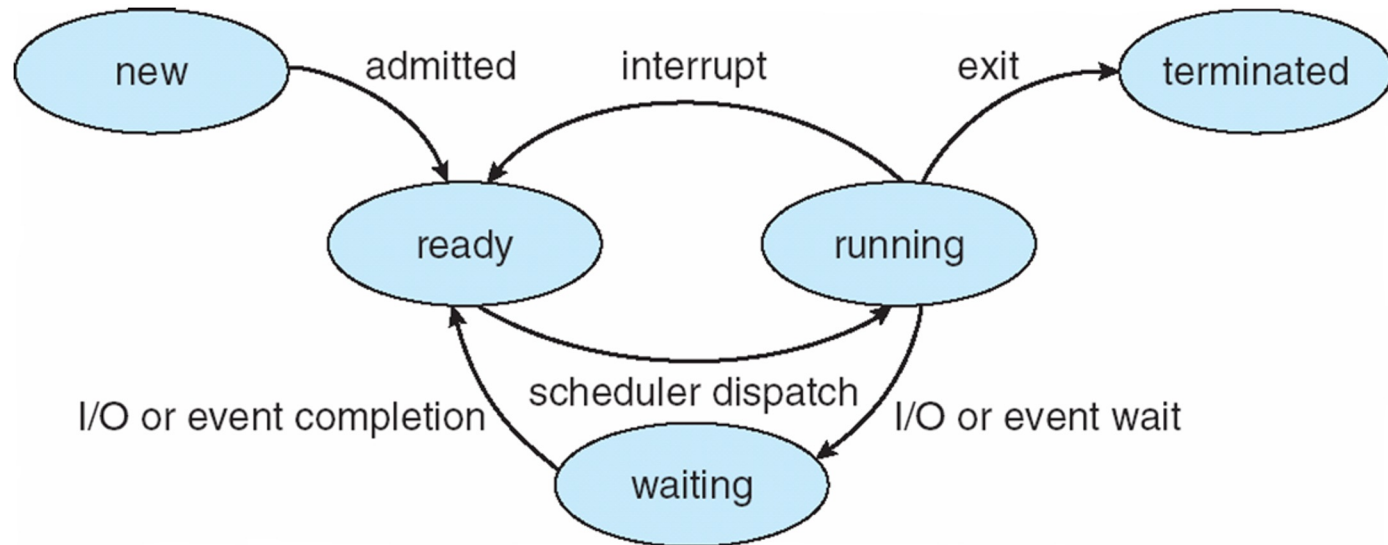




# Process Control Block (PCB)

Information associated with each process  
(also called **task control block**)


- **Process state** – running, waiting, etc
- **Program counter** – location of instruction to next execute
- **CPU registers** – contents of all process-centric registers
- **CPU scheduling information** – priorities, scheduling queue pointers
- **Memory-management information** – memory allocated to the process
- **Accounting information** – CPU used, clock time elapsed since start, time limits
- **I/O status information** – I/O devices allocated to process, list of open files

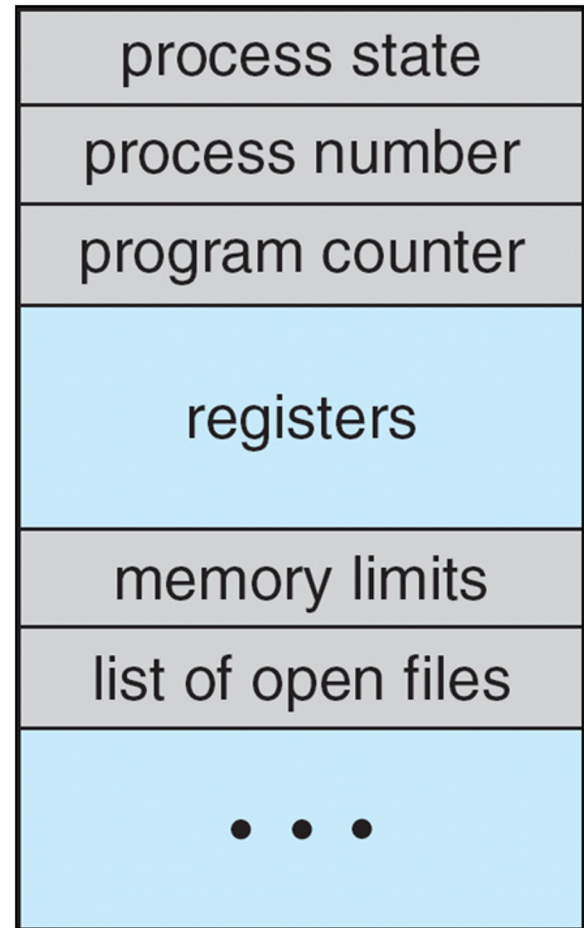





# CPU Switch from Process to Process

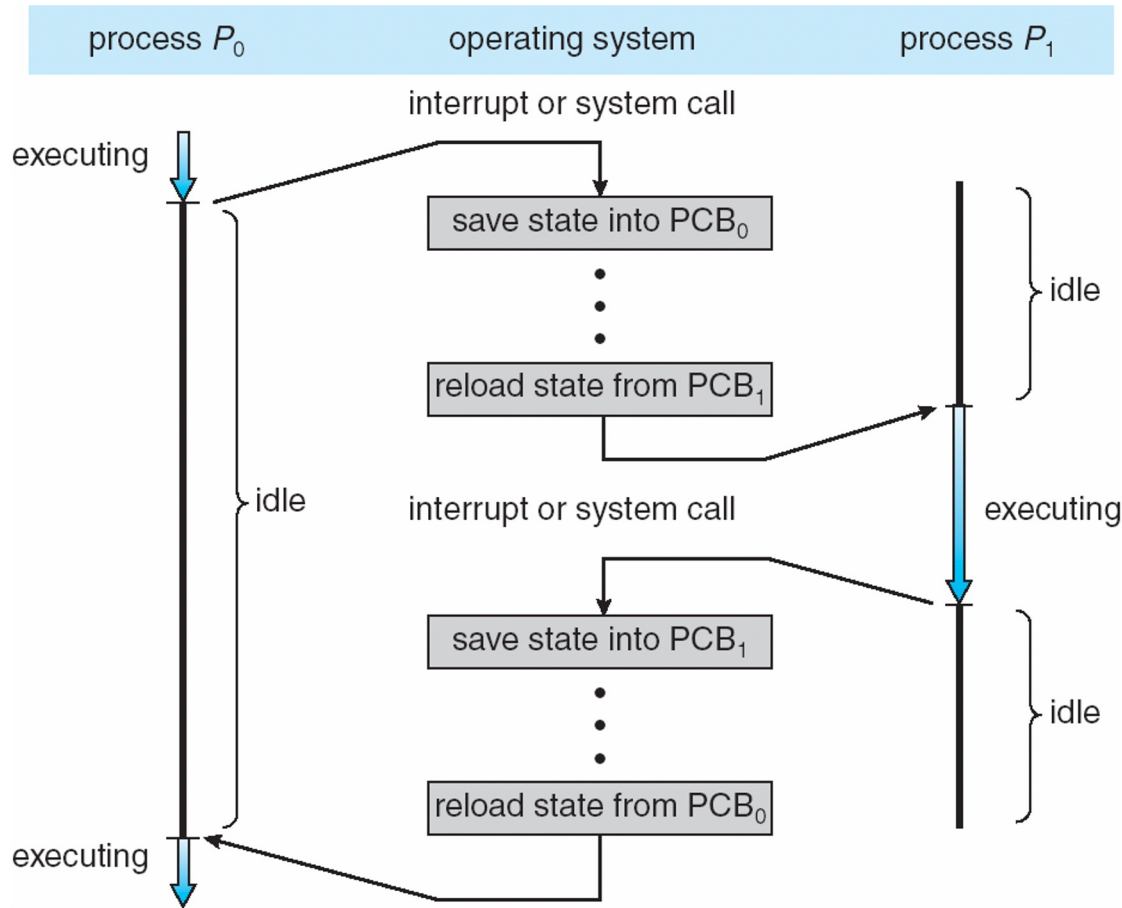



# Threads

---

- So far, process has a single thread of execution
- Consider having multiple program counters per process
  - Multiple locations can execute at once
  - 4 Multiple threads of control -> **threads**
- Must then have storage for thread details, multiple program counters in PCB
- See next chapter






# Process Representation in Linux

Represented by the C structure `task_struct`

```
pid t_pid; /* process identifier */
long state; /* state of the process */
unsigned int time_slice /* scheduling information */
struct task_struct *parent; /* this process's parent */
struct list_head children; /* this process's children */
struct files_struct *files; /* list of open files */
struct mm_struct *mm; /* address space of this process */
```

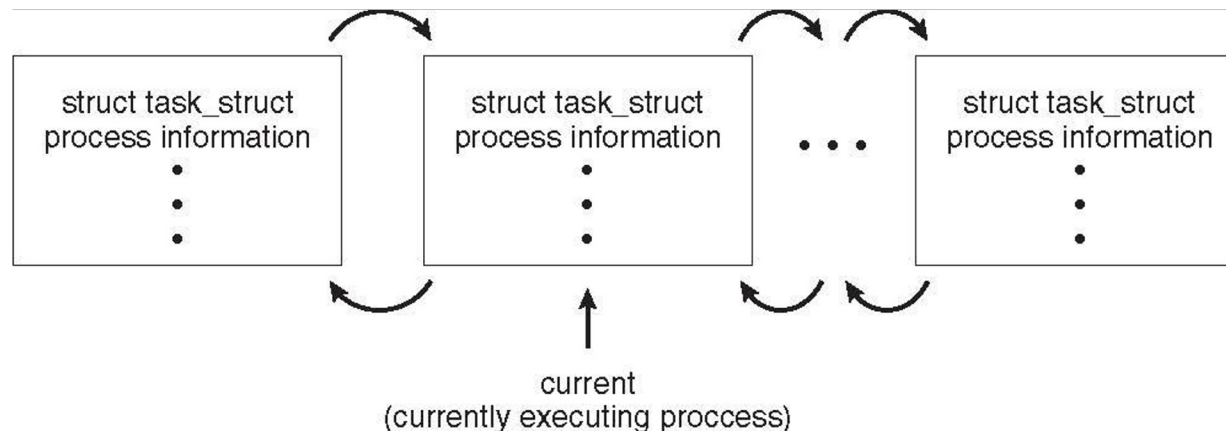




# Process Scheduling


---

- Maximize CPU use, quickly switch processes onto CPU for time sharing
- **Process scheduler** selects among available processes for next execution on CPU
- Maintains **scheduling queues** of processes
  - **Job queue** – set of all processes in the system
  - **Ready queue** – set of all processes residing in main memory, ready and waiting to execute
  - **Device queues** – set of processes waiting for an I/O device
  - Processes migrate among the various queues






# Ready Queue and Various I/O Device Queues

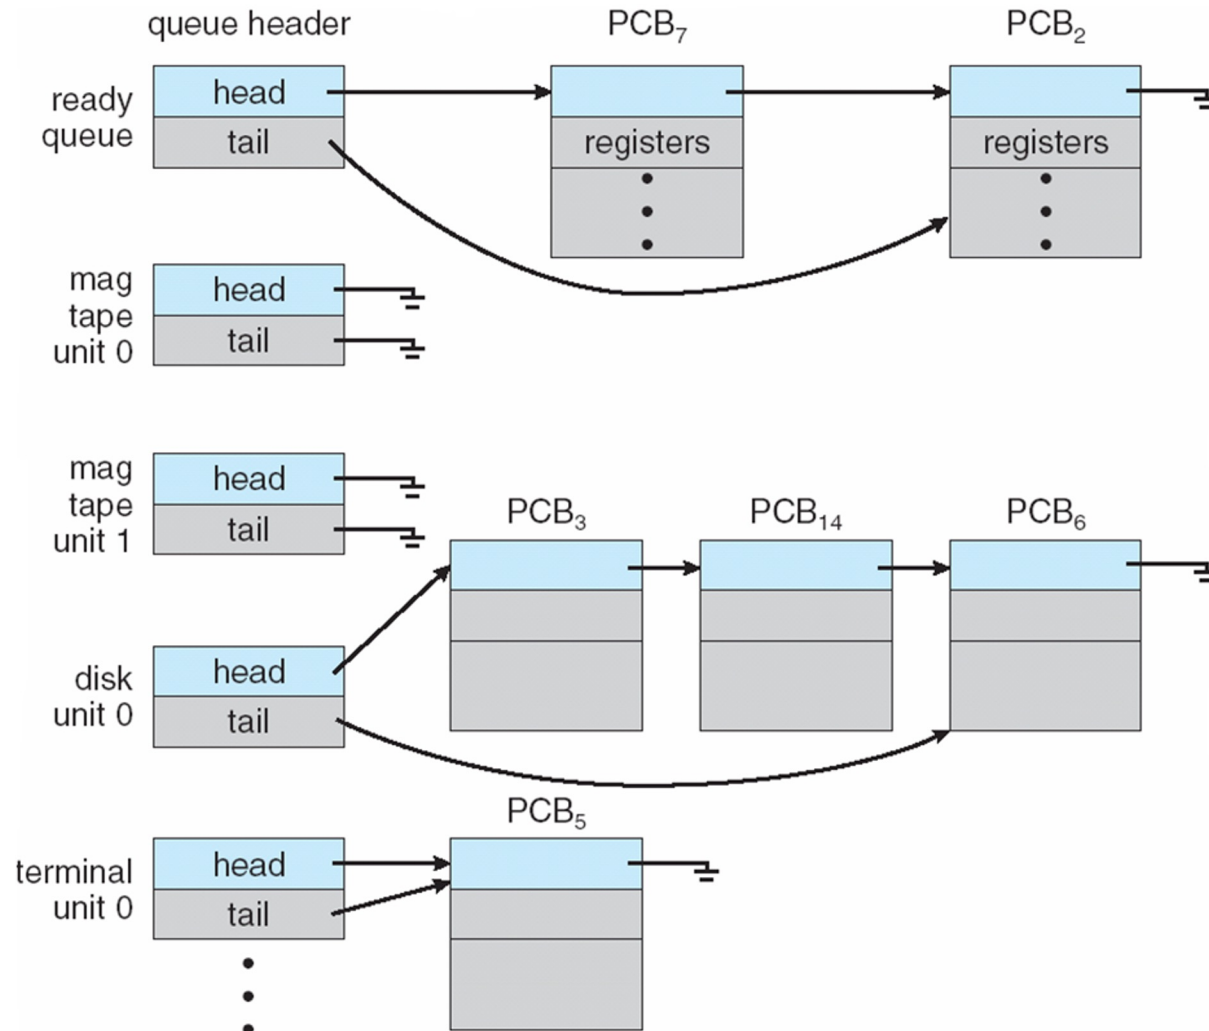



# Representation of Process Scheduling

- **Queueing diagram** represents queues, resources, flows

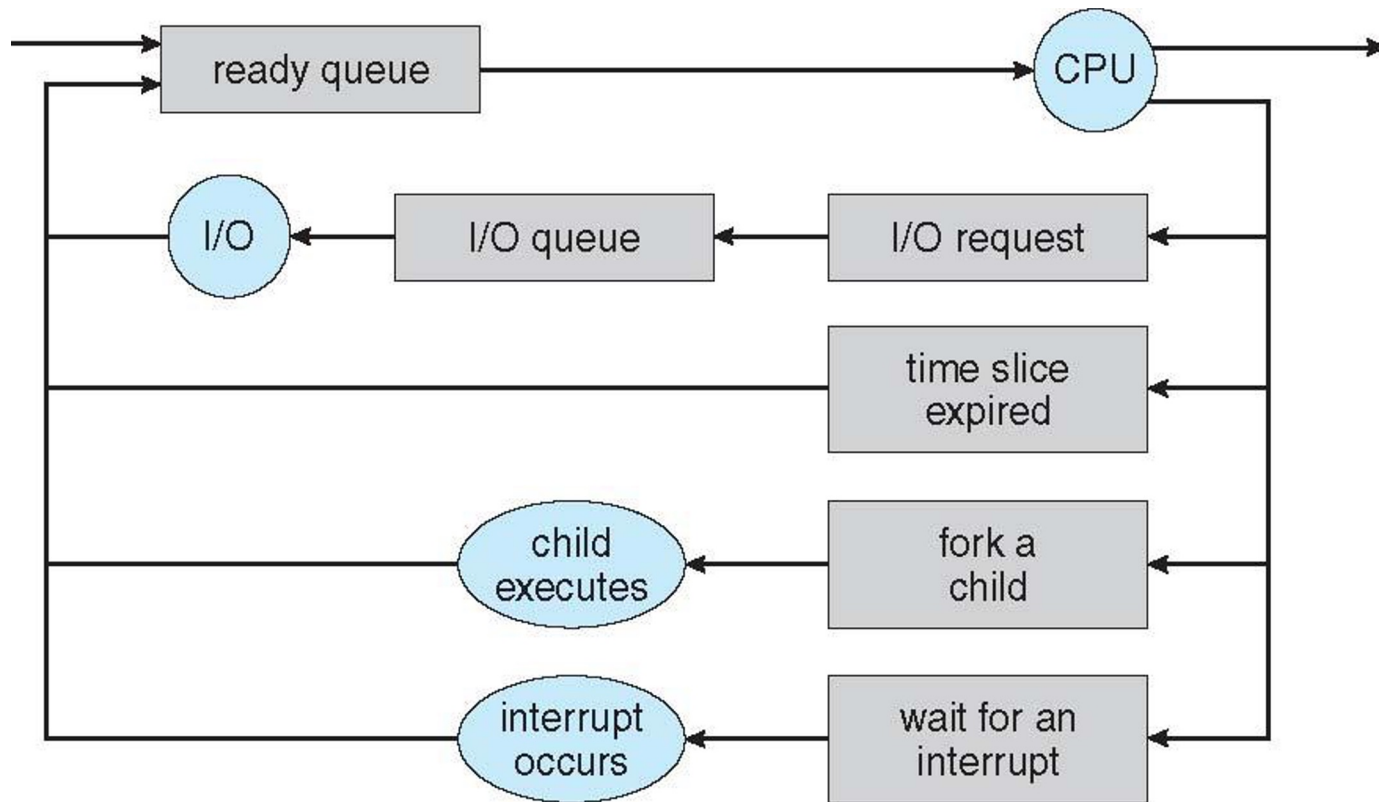



# Schedulers


- **Short-term scheduler** (or **CPU scheduler**) – selects which process should be executed next and allocates CPU
  - Sometimes the only scheduler in a system
  - Short-term scheduler is invoked frequently (milliseconds) ⇒ (must be fast)
- **Long-term scheduler** (or **job scheduler**) – selects which processes should be brought into the ready queue
  - Long-term scheduler is invoked infrequently (seconds, minutes) ⇒ (may be slow)
  - The long-term scheduler controls the **degree of multiprogramming**
- Processes can be described as either:
  - **I/O-bound process** – spends more time doing I/O than computations, many short CPU bursts
  - **CPU-bound process** – spends more time doing computations; few very long CPU bursts
- Long-term scheduler strives for good **process mix**





# Addition of Medium Term Scheduling

- **Medium-term scheduler** can be added if degree of multiple programming needs to decrease
  - Remove process from memory, store on disk, bring back in from disk to continue execution: **swapping**

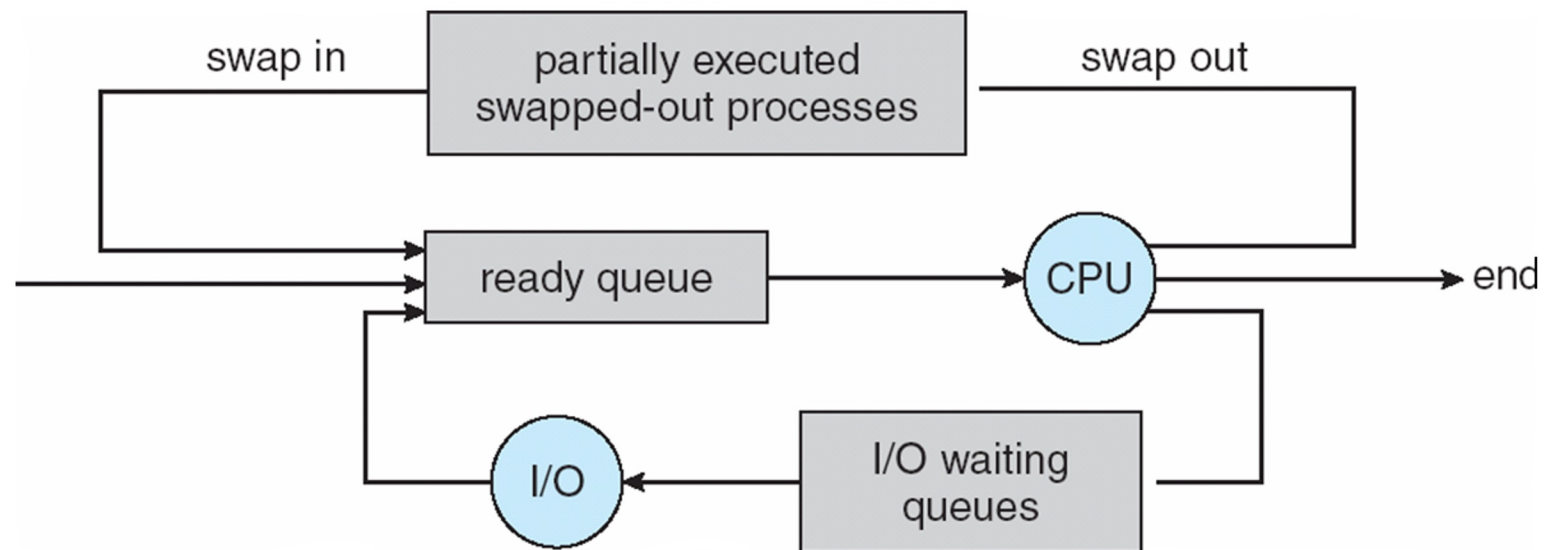





# Context Switch

- When CPU switches to another process, the system must save the state of the old process and load the saved state for the new process via a context switch
- Context of a process represented in the PCB
- Context-switch time is overhead; the system does no useful work while switching
  - The more complex the OS and the PCB  $\square$  the longer the context switch
- Time dependent on hardware support
  - Some hardware provides multiple sets of registers per CPU  $\square$  multiple contexts loaded at once





# Operations on Processes

---

- System must provide mechanisms for:
  - process creation,
  - process termination,
  - and so on as detailed next





# Process Creation

---


- **Parent** process create **children** processes, which, in turn create other processes, forming a **tree** of processes
- Generally, process identified and managed via a **process identifier (pid)**
- Resource sharing options
  - Parent and children share all resources
  - Children share subset of parent's resources
  - Parent and child share no resources
- Execution options
  - Parent and children execute concurrently
  - Parent waits until children terminate





# Process Creation (Cont.)

- Address space
  - Child duplicate of parent
  - Child has a program loaded into it
- UNIX examples
  - **fork()** system call creates new process
  - **exec()** system call used after a **fork()** to replace the process' memory space with a new program

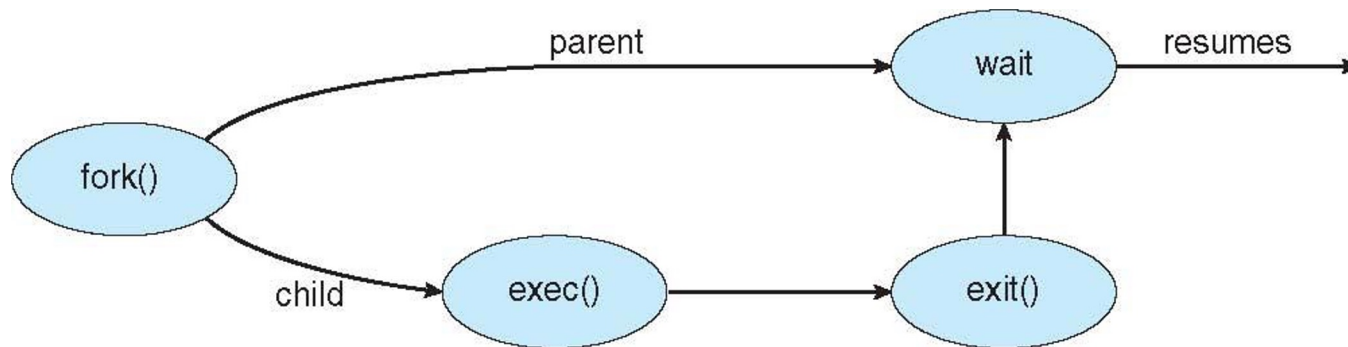



# Process Termination

---

- Process executes last statement and then asks the operating system to delete it using the `exit()` system call.
  - Returns status data from child to parent (via `wait()`)
  - Process' resources are deallocated by operating system
- Parent may terminate the execution of children processes using the `abort()` system call. Some reasons for doing so:
  - Child has exceeded allocated resources
  - Task assigned to child is no longer required
  - The parent is exiting and the operating systems does not allow a child to continue if its parent terminates





# Process Termination

- Some operating systems do not allow child to exist if its parent has terminated. If a process terminates, then all its children must also be terminated.
  - **cascading termination.** All children, grandchildren, etc. are terminated.
  - The termination is initiated by the operating system.
- The parent process may wait for termination of a child process by using the `wait()` system call. The call returns status information and the pid of the terminated process

```
pid = wait(&status);
```
- If no parent waiting (did not invoke `wait()`) process is a **zombie**
- If parent terminated without invoking `wait`, process is an **orphan**





# Multiprocess Architecture – Chrome Browser

- Many web browsers ran as single process (some still do)
  - If one web site causes trouble, entire browser can hang or crash
- Google Chrome Browser is multiprocess with 3 different types of processes:
  - **Browser** process manages user interface, disk and network I/O
  - **Renderer** process renders web pages, deals with HTML, Javascript. A new renderer created for each website opened
    - 4 Runs in **sandbox** restricting disk and network I/O, minimizing effect of security exploits
  - **Plug-in** process for each type of plug-in





# Interprocess Communication

- Processes within a system may be ***independent*** or ***cooperating***
- Cooperating process can affect or be affected by other processes, including sharing data
- Reasons for cooperating processes:
  - Information sharing
  - Computation speedup
  - Modularity
  - Convenience
- Cooperating processes need **interprocess communication (IPC)**
- Two models of IPC
  - **Shared memory**
  - **Message passing**









# Communications Models

(a) Message passing.

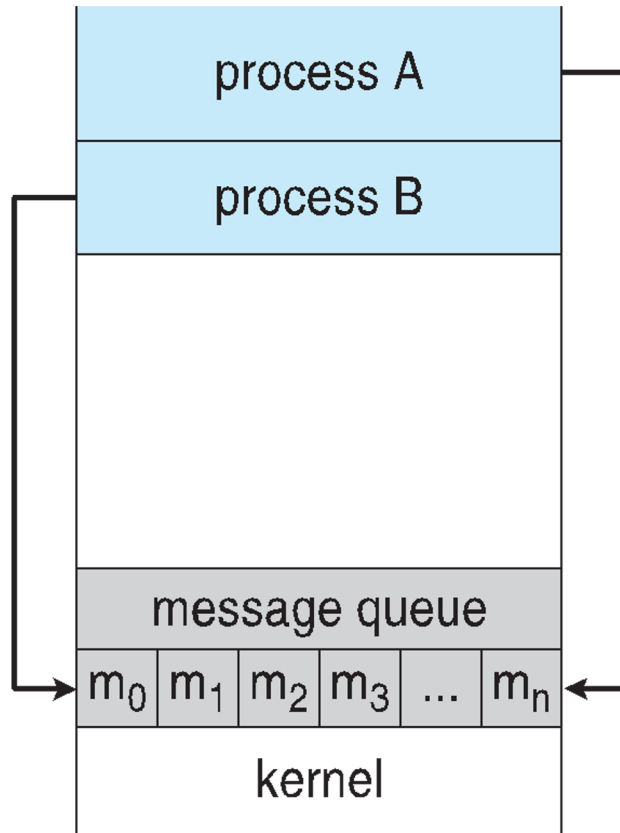

(a)

(b) shared memory.

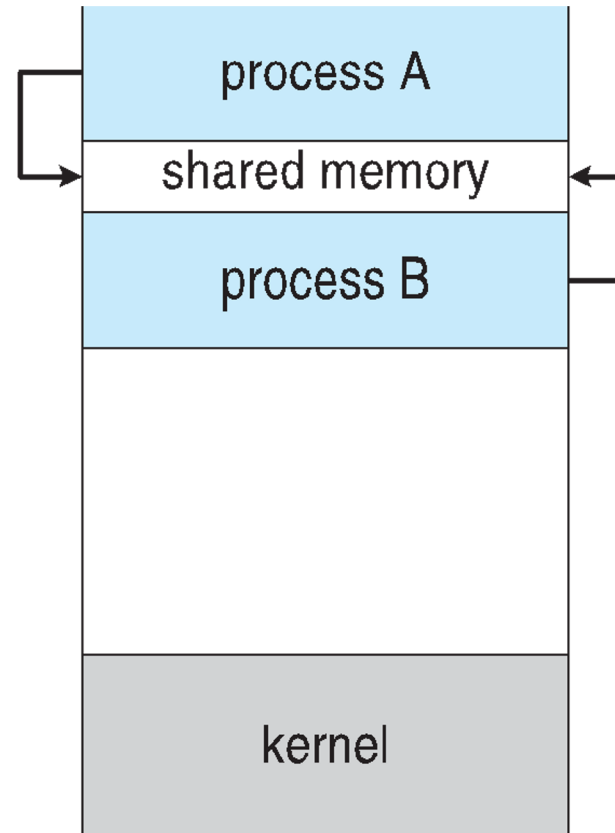

(b)





# Synchronization

- Message passing may be either blocking or non-blocking
- **Blocking** is considered **synchronous**
  - **Blocking send** -- the sender is blocked until the message is received
  - **Blocking receive** -- the receiver is blocked until a message is available
- **Non-blocking** is considered **asynchronous**
  - **Non-blocking send** -- the sender sends the message and continue
  - **Non-blocking receive** -- the receiver receives:
    - A valid message, or
    - Null message
- Different combinations possible
  - If both send and receive are blocking, we have a **rendezvous**



# End of Chapter 3

---

