


Exercise list of UML Interface Specification

Exercises:

October 18, 2017

1. By using OCL, let specify the operation: `consigueDetallesCliente(in_cliente: IdentificadorCliente): DetallesCliente` of the interface `GestionClientes`, which class diagram is shown in figure below.

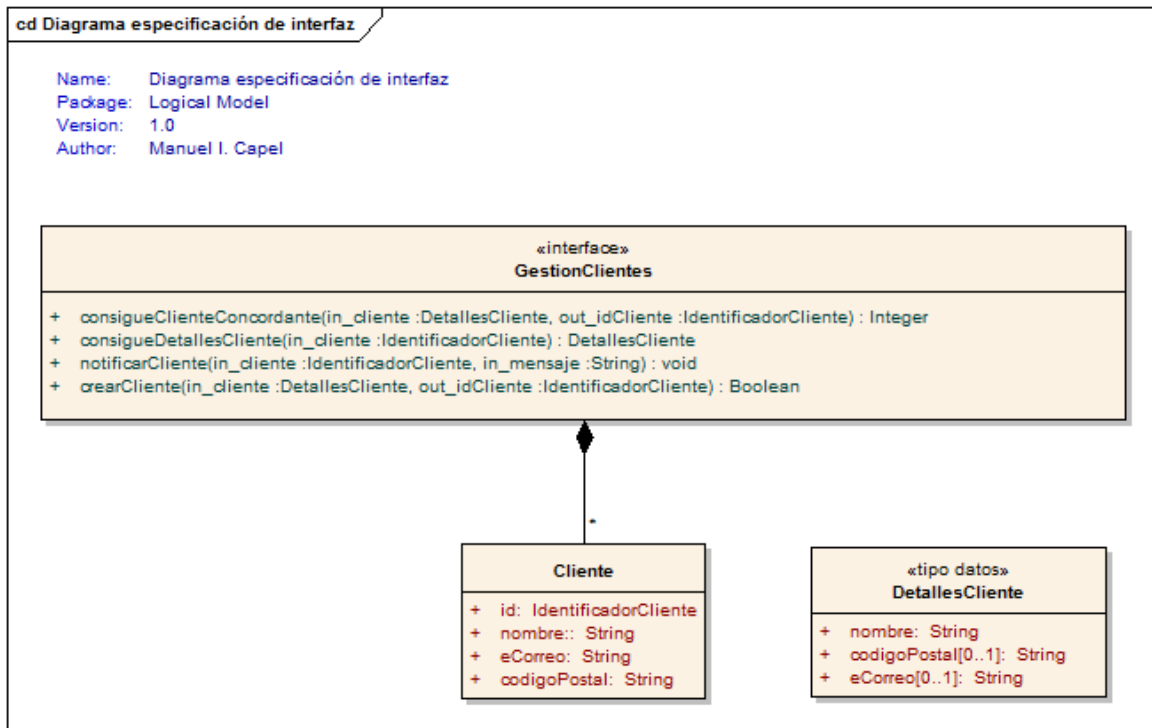

Note: OCL operations reference guide can be found at https://wiki.eclipse.org/Accelerio/OCL_Operations_Reference


2. We need to develop an *interface information model* (IIM) of a enrollment system for universities around the World. The name of the interface will be `IEnrollment`:
 - `getUniversity(Imagine which parameters has to have this operation):UniversityDetails`
 - `getCourse(Imagine which parameters has to have this operation):void`
 - `makeEnrollment(Imagine which parameters has to have this operation):enrollmentAcknowledged`

Other entities in the asked IIM to be defined:

- University
 - Name
 - Identifier
 - Shanghai ranking
 - Tuition fee per year
 - Any missing other that could be important too

- College or Faculty
 - Name
 - Application dates range
 - Any missing other that could be important too
- Course
 - Name
 - Teaching dates
 - SeatsAvailableAtDate
 - Any missing other that could be important too
- Enrollment
 - Reference
 - CourseCode[1..n] courses
 - Any missing other that could be important too
- Student
 - Name
 - e-Mail
 - postCode
 - Any missing other that could be important too

3. By using OCL, let specify the operation `getStudentDetails(in_student : StudentIdentifier)` is an operation of the interface `StudentManagement`, which is included in a UML Interface Diagram to the one shown in figure below (interface class for general student management):

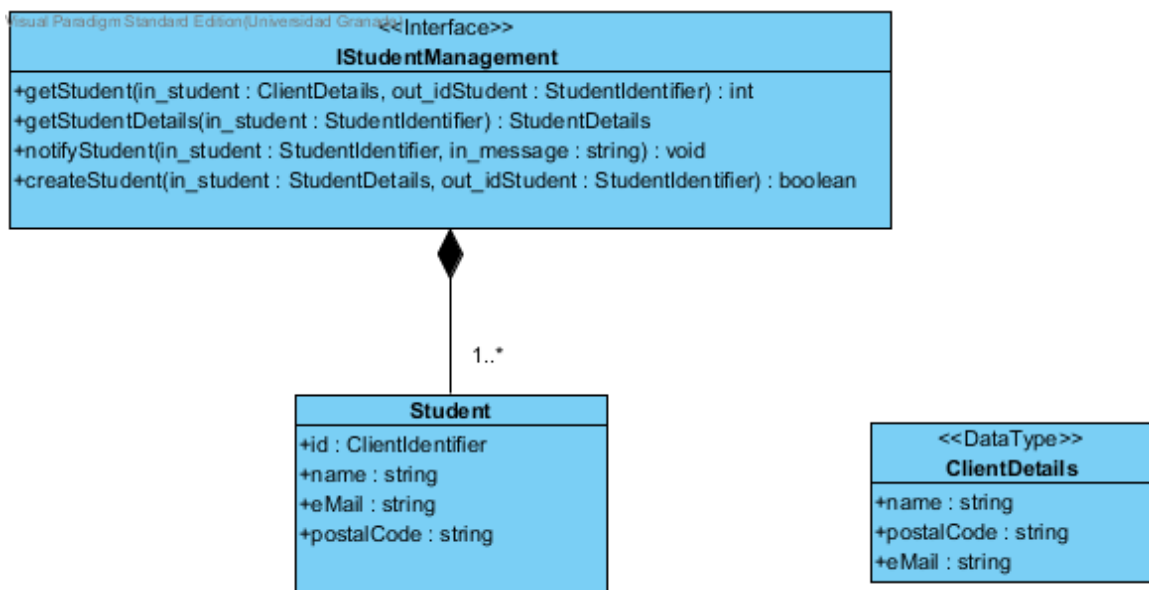

4. Specify the operation `IHotel::MgtmakeReservation` by using OCL and the operator listed in table below: `exists`, `select`, `asSequence`, `first`:

Note: in the precondition it's necessary to make sure that `id_student` represents a valid student identifier and, in the postcondition, that the returned details by the operation match with the student details whose identifier is `in_student`

OCL operator	meaning
exists	existential quantifier(predicate)
select	select an element from a range, fulfilling a condition given
in	comes before the specification of the postcondition result
asSequence	Returns a Sequence containing all elements of self. Element ordering is preserved when
first	Returns the first element of self

- Factorize the common information elements of interfaces: `IMakeReservation` and `ITakeUpReservation` and put them in a new interface: `IReservationSystem`. Then, the interfaces `IMakeReservation` and `ITakeUpReservation` inherit from `IReservationSystem`.
- Make the class diagrams of the interfaces `IReservationSystem` and rebuild the `IMakeReservation` one.
- Write the correct code of a Maven component that performs the *managed bean* `MensajeBean` injection into the *bean* `HolaMundo2`, such as when the second one gets executed yields the following output:
 - When the page `http://localhost:8080/holamundo2/` is opened, we get the following message: `Hola a todo el Mundo y parte del extranjero!`
 - The console of our IDE will show: `Hola Mundo-2 ha comenzado! Nada aun!`

```

1 import java.io.Serializable;
2 import javax.faces.bean.ManagedBean;
3 import javax.faces.bean.ManagedProperty;
4 import javax.faces.bean.RequestScoped;
5
6 //Bean management instructions and the scope of the managed ben have been omitted
7 public class HolaMundo2 implements Serializable {
8
9     //The annotation used to program a property dependency injection is missed
10
11     private MensajeBean mensajeBean;
12     private String mensaje="Nada_aun!";
13
14     public HolaMundo2(){
15         System.out.println("Hola_Mundo-2_ha_comenzado!");
16         System.out.println(mensaje);
17     }
18 //Complete the following code so that the program runs correctly
19 }
20 import java.io.Serializable;
21 import javax.faces.bean.ManagedBean;
22 import javax.faces.bean.ManagedProperty;
23 import javax.faces.bean.RequestScoped;
24
25 //Bean management instructions and the scope of the managed ben have been omitted
26 public class MensajeBean implements Serializable{
27     private String mensaje= "Hola_a_todo_el_Mundo_y_parte_del_extranjero!";
28 //Complete the following code so that the program runs correctly
29 }

```