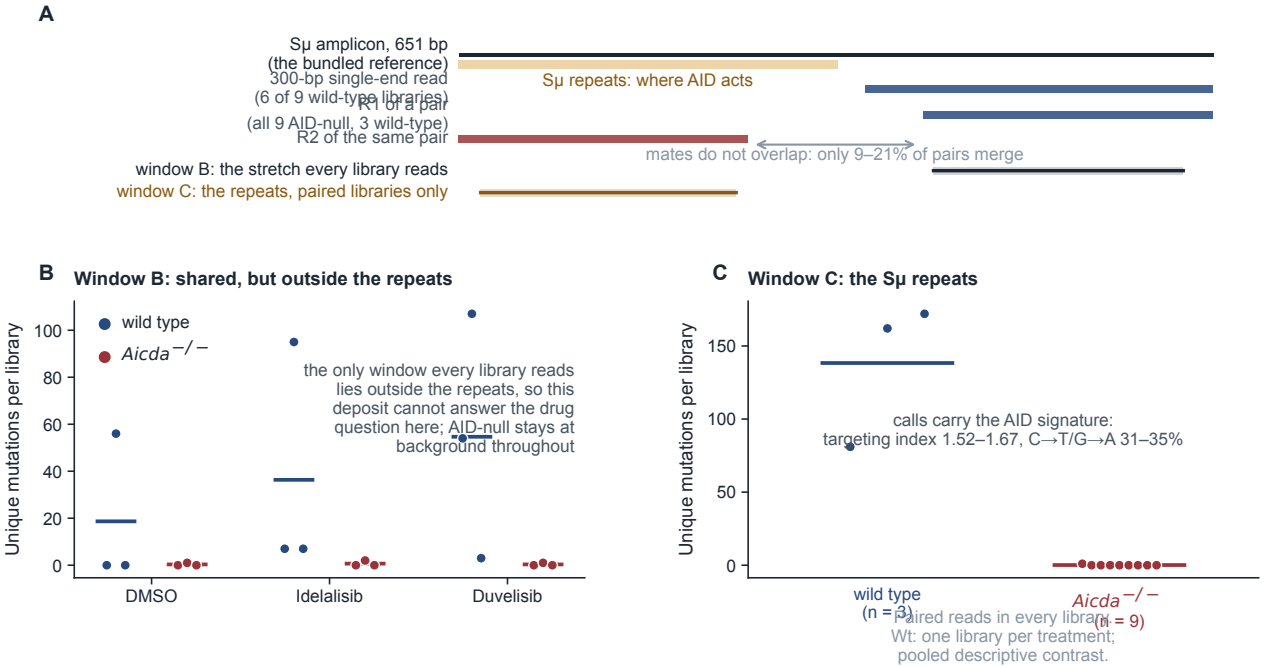


B uses the interval shared by all libraries; C uses the repeat interval in paired-read libraries only.