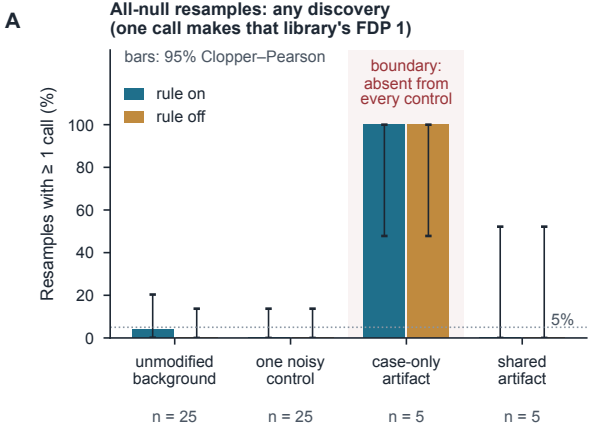
A
All-null resamples: any discovery
(one call makes that library's FDP 1)
bars: 95% Clopper–Pearson
rule on
rule off
boundary:
absent from
every control
Resamples with ≥ 1 call (%)
100
80
60
40
20
0
5%
unmodified
background
one noisy
control
case-only
artifact
shared
artifact
n = 25
n = 25
n = 5
n = 5

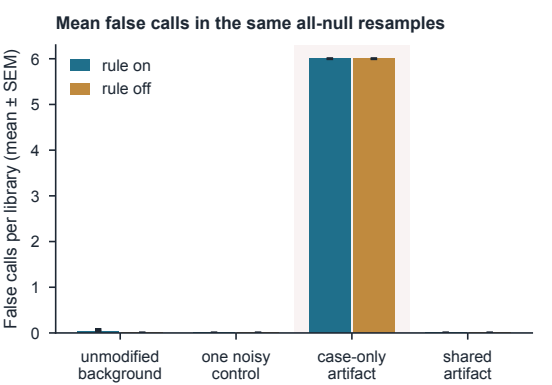
B
Mean false calls in the same all-null resamples
rule on
rule off
False calls per library (mean ± SEM)
6
5
4
3
2
1
0
unmodified
background
one noisy
control
case-only
artifact
shared
artifact

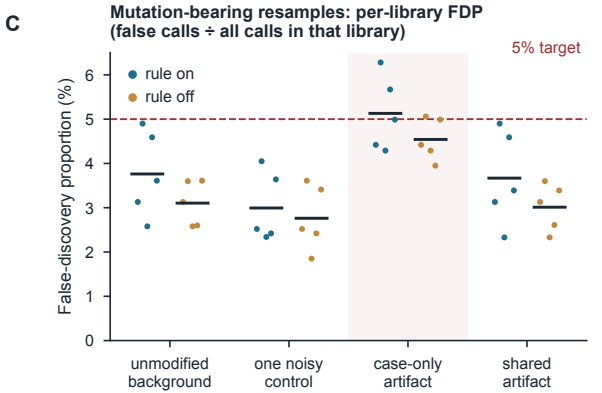
C
Mutation-bearing resamples: per-library FDP
(false calls ÷ all calls in that library)
5% target
rule on
rule off
False-discovery proportion (%)
6
5
4
3
2
1
0
unmodified
background
one noisy
control
case-only
artifact
shared
artifact

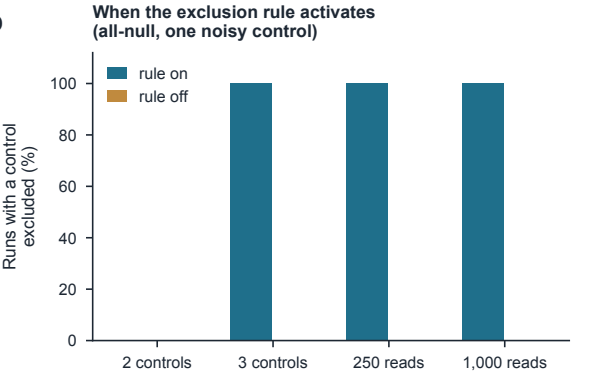
D
When the exclusion rule activates
(all-null, one noisy control)
rule on
rule off
Runs with a control
excluded (%)
100
80
60
40
20
0
2 controls
3 controls
250 reads
1,000 reads