

UGOS Pro Firmware Update Guide

1. Preparations Before UGOS Pro Firmware Update

This section provides a detailed guide on the preparations and considerations needed before updating the UGOS Pro firmware. To ensure a smooth update process, please read the following information carefully.

1.1 Applicable Models

This ISO image is applicable for the following UGREEN NAS products:

- DH2600
- DX4600*: DX4600、DX4600+、DX4600 Pro;
- DXP Series: DXP2800、DXP4800、DXP4800 Plus、DXP6800 Plus、DXP6800 Pro、DXP8800、DXP8800 Plus、DXP8800 Pro、DXP480T Plus。

For other products, please contact UGREEN's official technical support for assistance.

1.2 Data Backup

Before updating, it is crucial to back up all important personal data to the cloud or a computer. There are risks involved in this process, and improper operations may lead to data loss or device malfunction.


1.3 Obtain the Official ISO Image

1. Contact UGREEN NAS official technical support and provide the device serial number (SN).
2. Download the ISO image using the link provided by technical support (the link is valid for one download).

1.4 Create a Bootable USB Drive

This step requires using a disk writing tool on your computer to burn the image file onto a USB drive. The USB drive can be removed after the installation is complete. You can choose from disk writing tools such as Rufus, Balenaetcher, etc. The following example uses Rufus:

1. Insert the USB drive and open the Rufus software, which will automatically recognize the USB drive connected to your computer.
2. Click "Select" to choose the downloaded system ISO image, use the FAT file system, and leave other options at their default settings.
3. Click "Start," and once the progress bar turns completely green, the process is complete, and you can remove the USB drive.

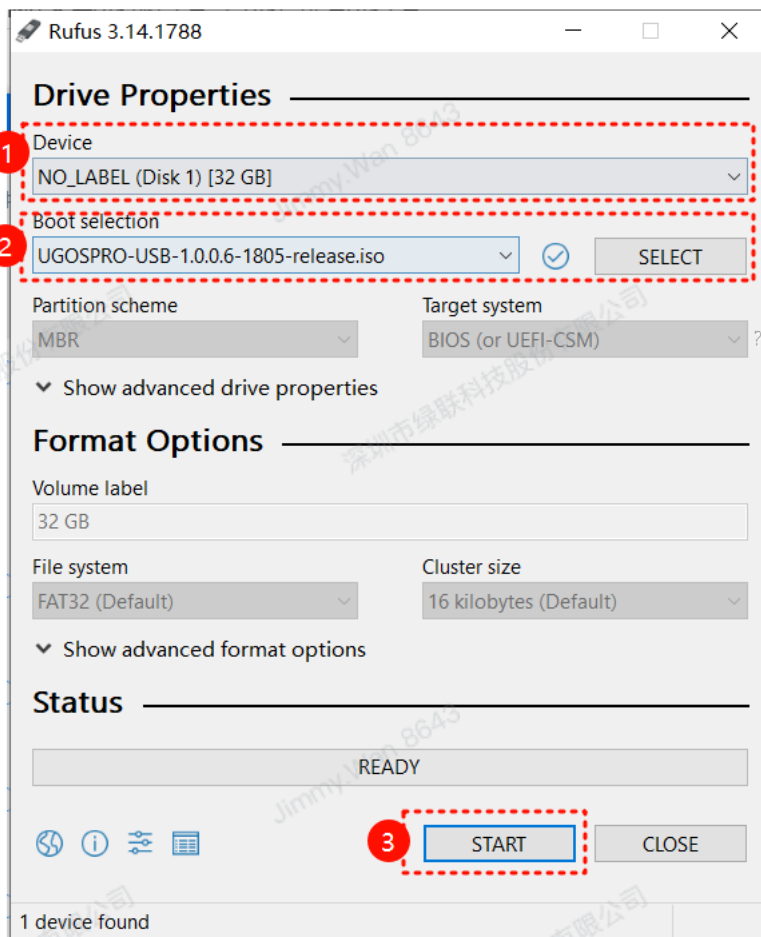

Note: It is recommended to use a USB drive with more than 4GB of available space for creating the system disk.

1.5 Precautions

1. **Official Image:** Only obtain the latest system ISO image link from official technical support to avoid downloading from unknown sources, which could result in virus or malware infection.

2. **Network Environment:** Ensure that your NAS device and the current computer are on the same local area network (LAN) and connected to the internet with a stable connection. Network fluctuations or interruptions may cause data transmission errors, affecting the device update.
3. **Power Supply:** Ensure a stable power supply during the update process to prevent power outages that could lead to update failure or device malfunction.
4. **Follow the Guide:** Strictly follow the tutorial instructions for each step and do not skip any part. It is advisable to read the entire guide before starting the process.
5. **Be Patient:** Depending on the device, the process may take several minutes to several tens of minutes. Do not interrupt the connection or force a restart during this time.

2. UGOS Pro Firmware Update Procedure


2.1 Access the Update Interface

1. Insert the prepared bootable USB drive into the NAS and connect a USB keyboard.
2. Power on and press the shortcut key to launch the update program. The shortcut keys vary by device model:

DXP Series: CTRL+F10


DX4600*: CTRL+F5

DH2600: SHIFT+F11
3. Release the shortcut key after hearing one beep and wait for the second beep, indicating the start of the update program.
4. Enter `<NAS Address>: 9999` in a browser to access the installation interface, for example, enter `192.168.31.70:9999` .

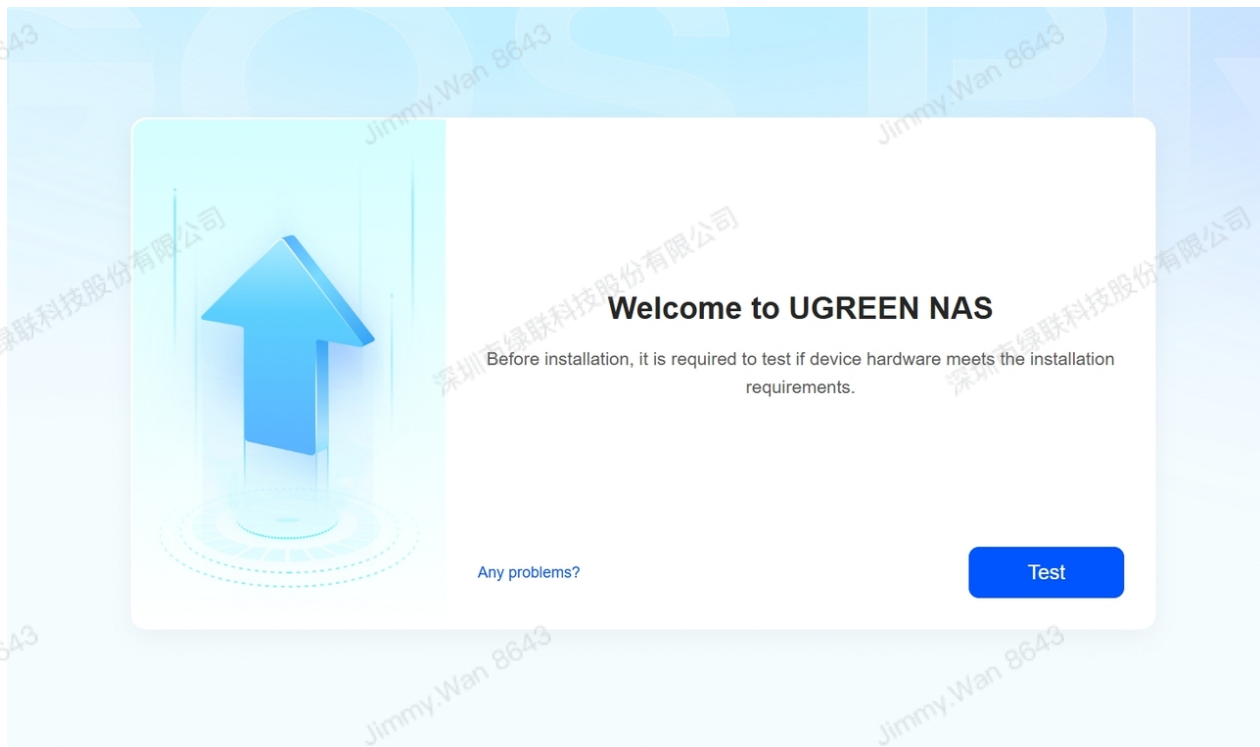

Query the Device's IP Address


After launching the update program, the PC or mobile client "UGREEN NAS" can search for the device in the LAN and query its IP address.

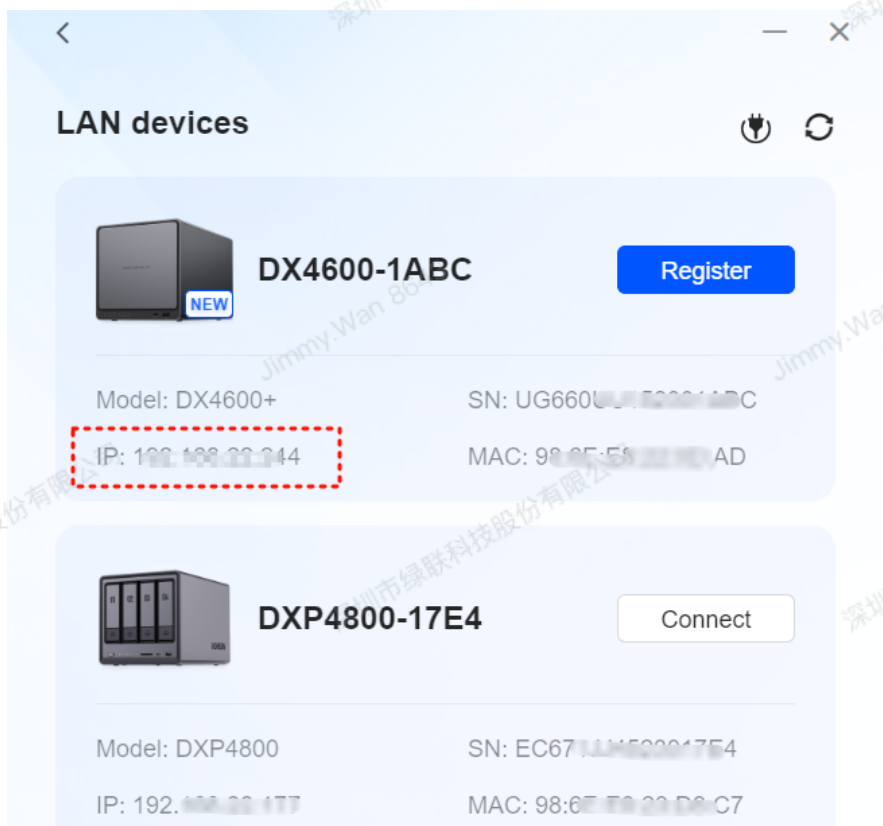


Note: The client version must be updated to the latest version. Client download address: <https://nas.ugreen.com/pages/app-download>

2.2 Update Steps


1. Click "Start Detection" on the installation interface to begin checking if the device's hardware meets the installation requirements.

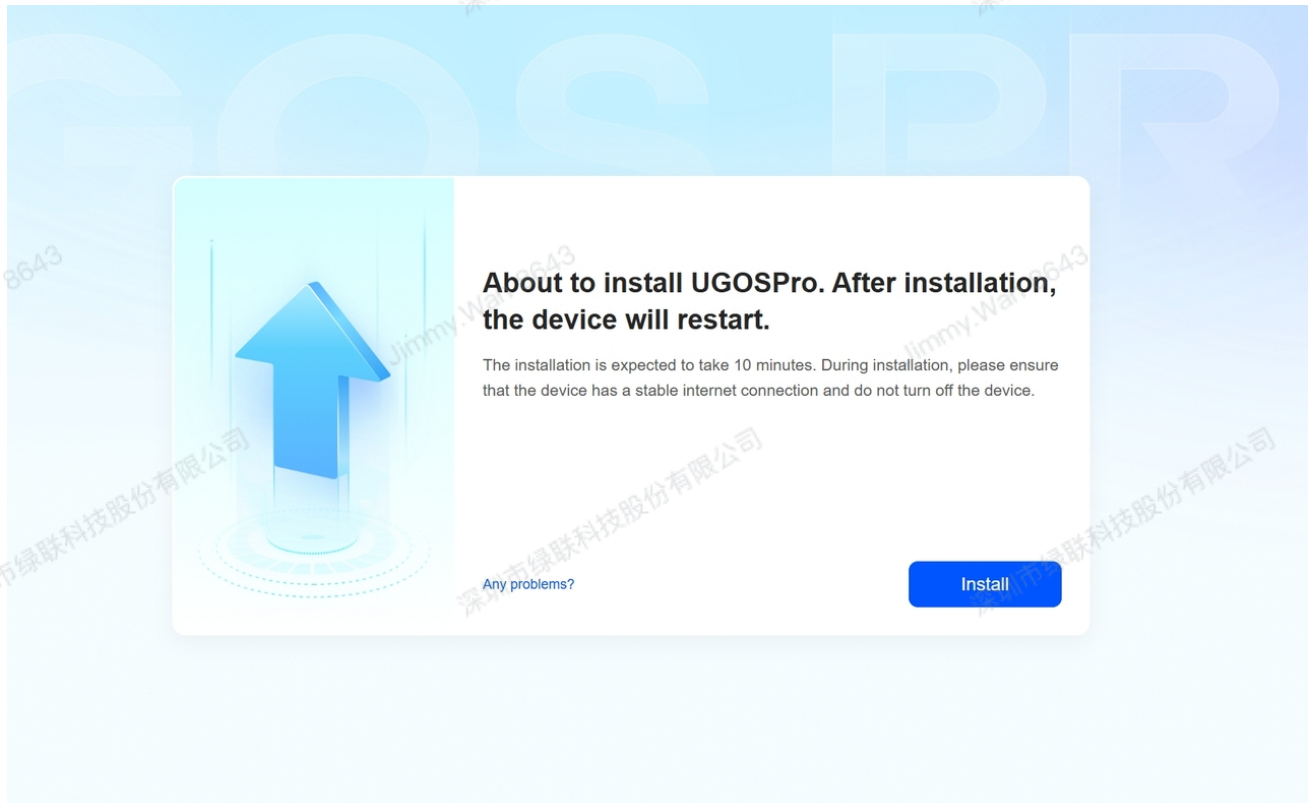


2. After the hardware detection is complete, click "Start Installation" on the installation interface and enter your device's SN in the pop-up window to confirm the installation.

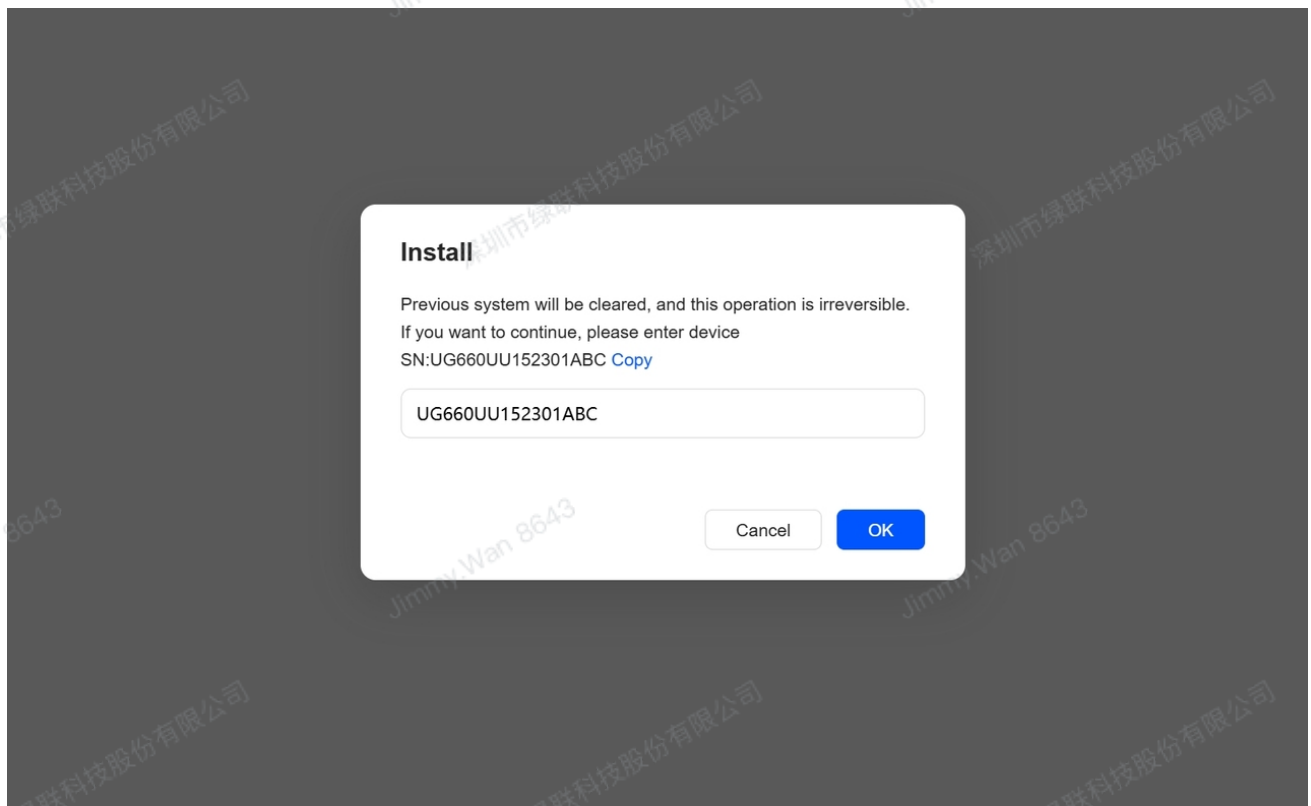

3. After confirming the installation, the system will automatically verify the installation package.

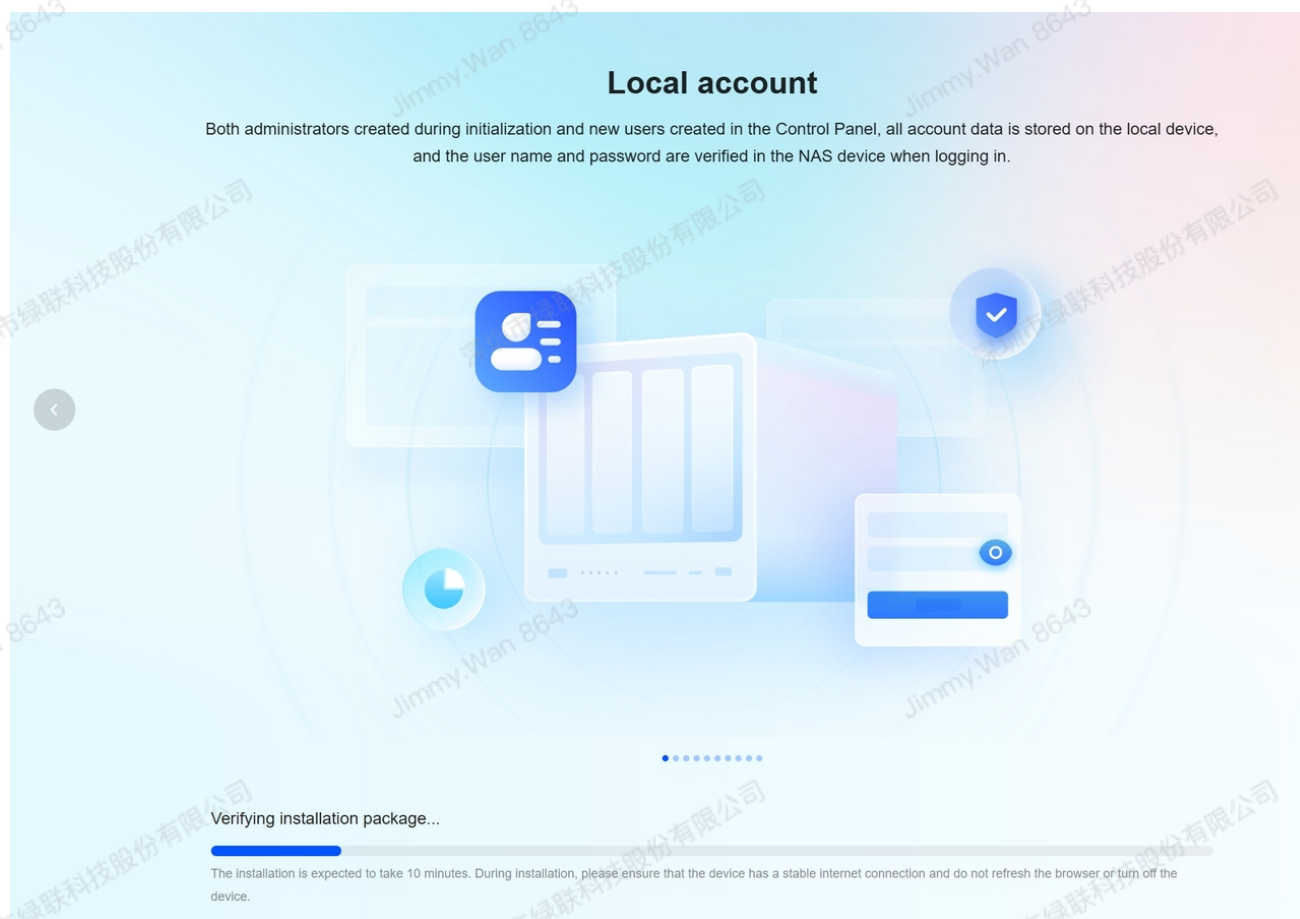


4. Once the package verification is complete, the system will proceed with the automatic installation.

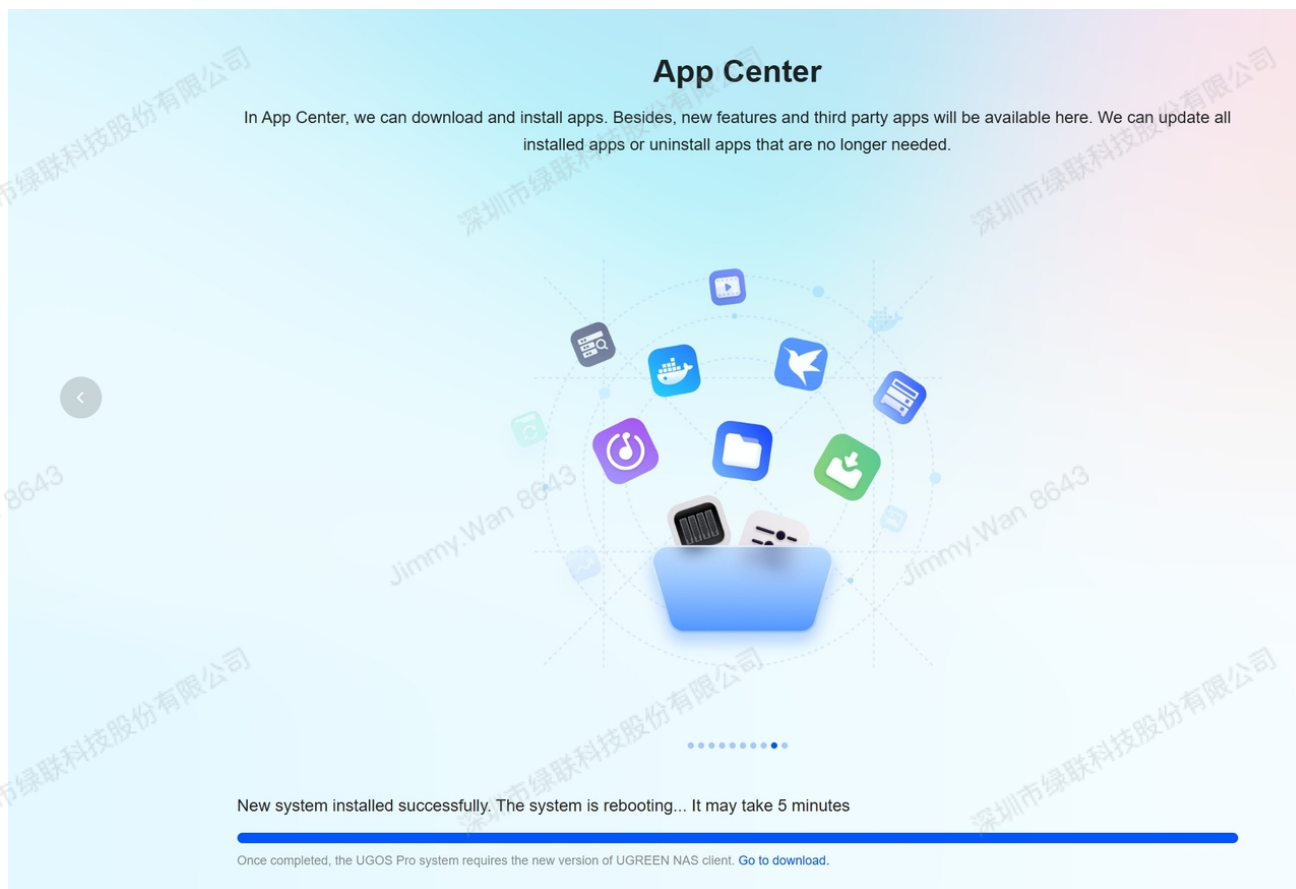

Note: The installation is expected to take approximately 10 minutes. Ensure the device remains in a stable network environment and do not power off the device.

5. After the system installation is complete, the page will automatically redirect to the UGREEN NAS initialization page, where you can register and log in to the new device. For details, refer to the [New User Guide](#).

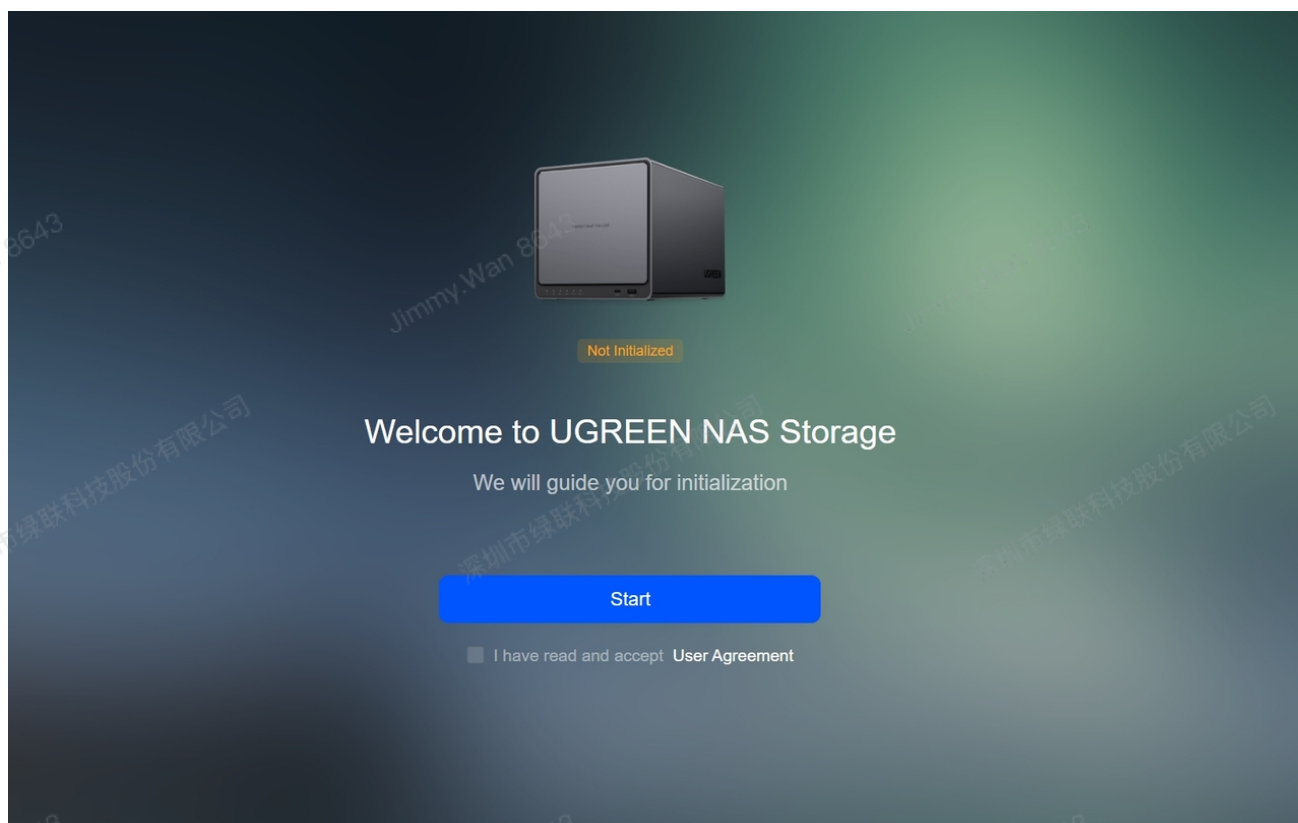

3. FAQ

3.1 What to do if the device fails the detection or the installation?

Answer:

1. Check the device's network connection to ensure a stable environment during the update process.
2. If the device has less than 8GB of memory, upgrade the memory before proceeding with the installation.
3. If there is no eMMC or M.2 slot for system installation, contact technical support.
4. For other issues, contact technical support.

3.2 On which platforms can the update be performed?

Answer: After the boot program starts, only web-based operations are supported; mobile devices will prompt users to switch to a web browser after detecting the device.

3.3 Client Unable to Detect the Device for Firmware Update

Answer:

1. Please ensure that the device for firmware update and the client (PC/Mobile) are on the same local area network (LAN).
2. Please ensure that the client is updated to the latest version.

3.4 Why is it necessary to provide the SN (Serial Number) to technical support before updating?

Answer: Users contact technical support and provide the device's SN, which allows the support team to add the SN to the firmware update whitelist in the backend management system and generate an ISO image link. This ISO image is only available for that specific device and cannot be used by other devices for the update. If another update is needed after a successful update, the SN must be provided again to request a new ISO image link.

3.5 Is the ISO image link only valid for one use?

Answer: The provided ISO image download link is valid for one download. Once the download is complete, the link will no longer work for subsequent downloads.

3.6 What are the risks associated with updating?

Answer: Updating may result in the device becoming unbootable (bricked). If the update fails and the hardware is not damaged, the update can be attempted repeatedly until successful.

3.7 Where is the system updated to?

Answer: The system is updated to the device's built-in eMMC or SSD, and the process will erase the existing data.

3.8 How can you determine if the update was successful?

Answer: If the device can start and run the new system normally, it generally indicates a successful update. Check the device's functionality and network connectivity.

3.9 Can you revert to the previous system after updating to UGOS Pro?

Answer: It is not possible to revert to the previous system after updating.

3.10 Can a mobile hard drive be used as a boot drive instead of a USB drive?

Answer: It is possible, but some devices may not recognize solid-state drives, so it is not recommended.