

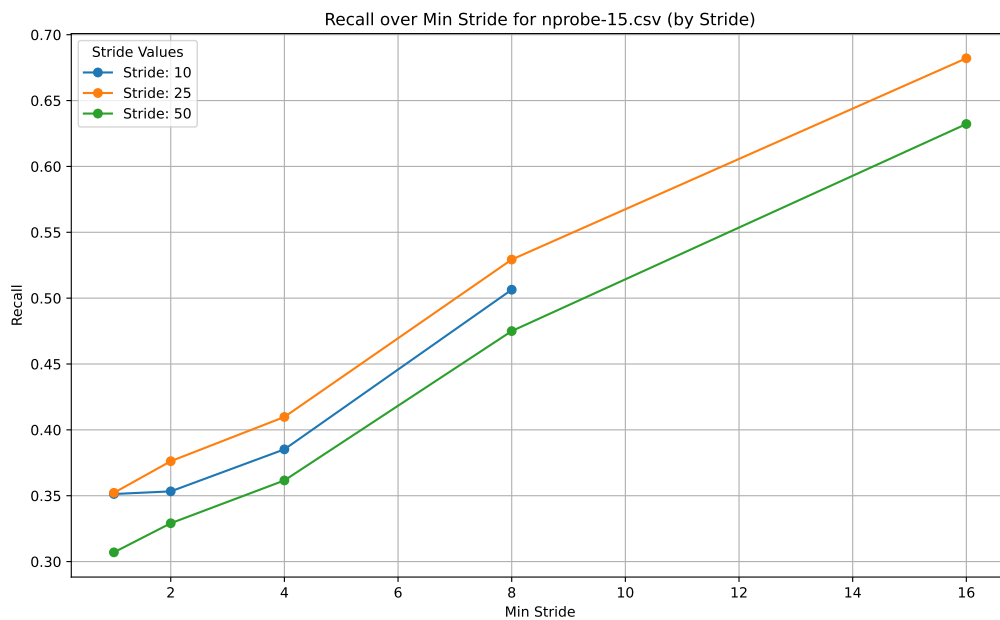



Report on new BSIVF nprobe based implementation



A new implementation for the bsivf index has been added. In this implementation, a new parameter nprobe has been added to the bsivf index so as to make binary search based on the number of probes.

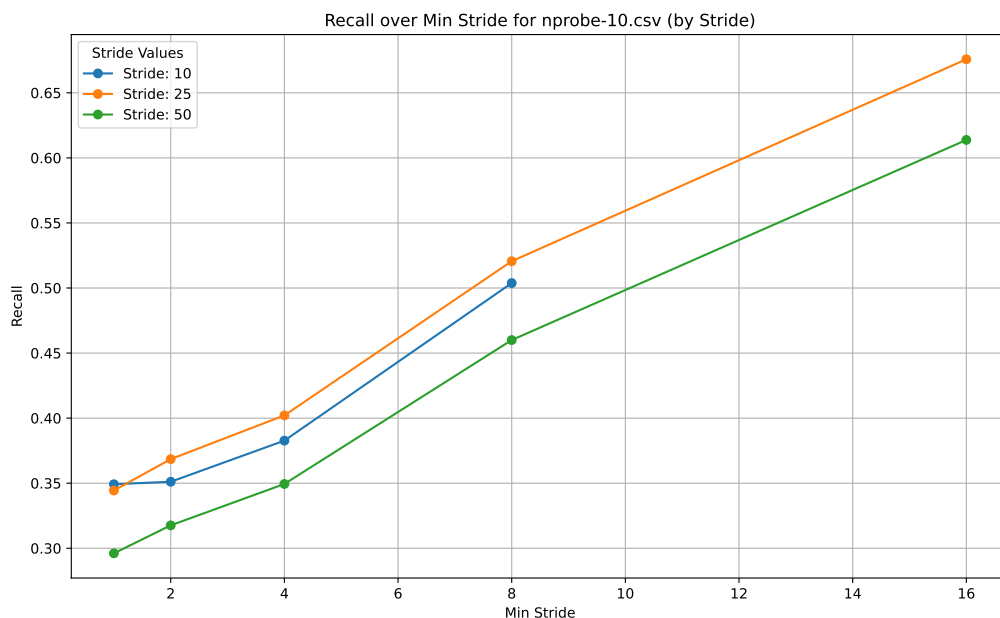

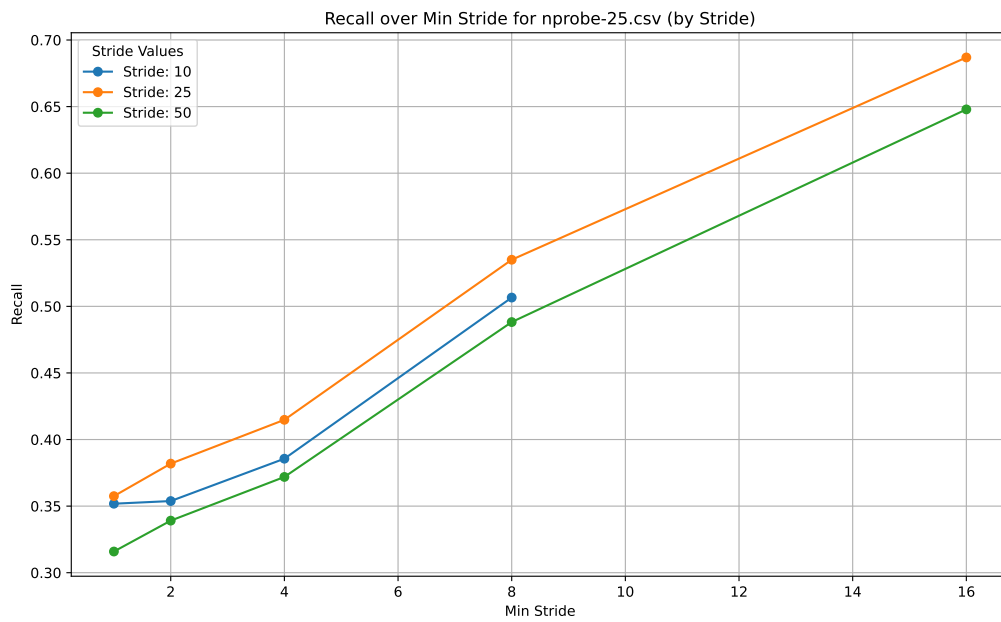

In addition, to that I made calculations for recall based on a tolerance value, i.e. how many points fall within a certain distance – tolerance – from the ground truth. Here are the plots based on the tolerance value: 10.

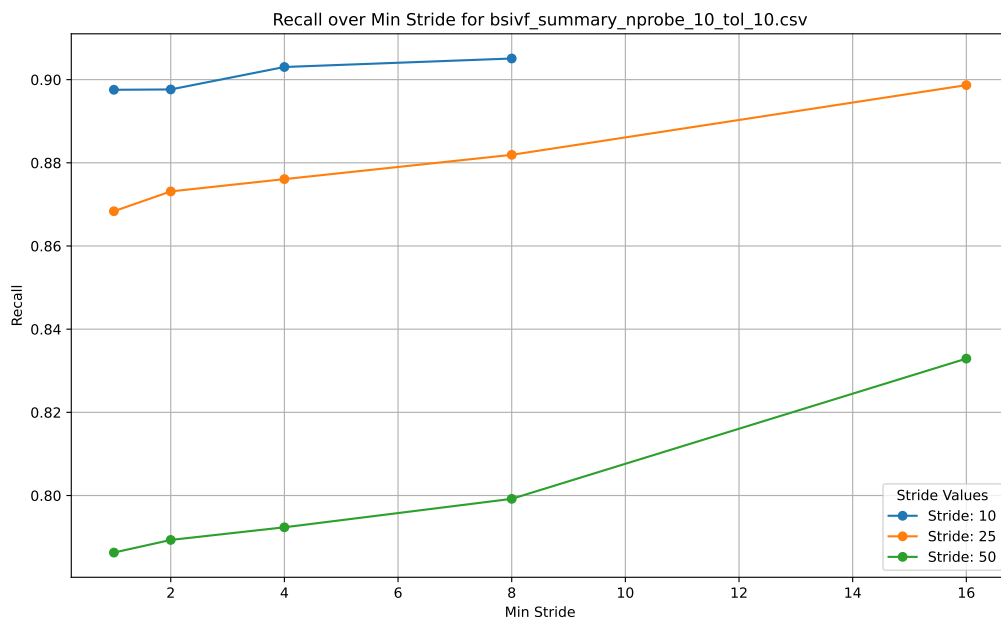

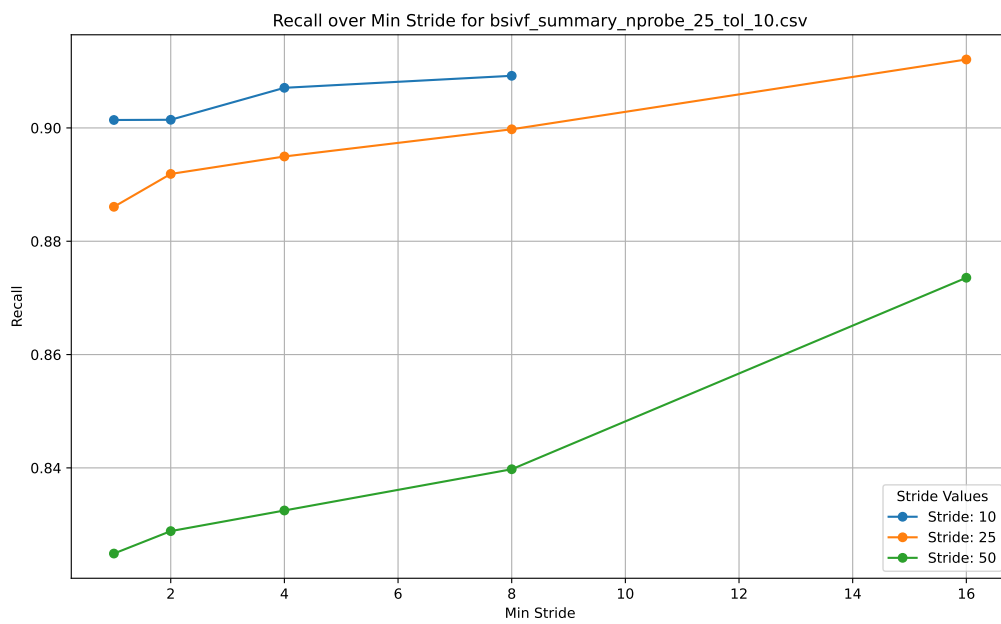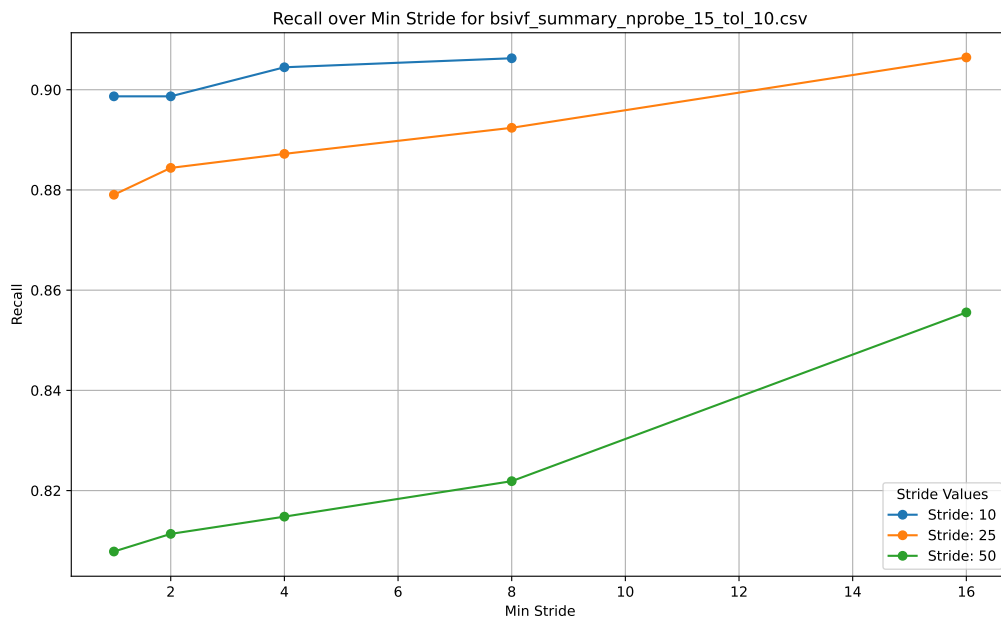

From the above it is quite clear that $n_{\text{probe}} = 25$ is the optimal value for the number of probes. In that case, the following plot shows recall plot for different strides but with the strides as the tolerance value.

