



### There were issues affecting this run of Lighthouse:


- Chrome extensions negatively affected this page's load performance. Try auditing the page in incognito mode or from a Chrome profile without extensions.
- There may be stored data affecting loading performance in this location: IndexedDB. Audit this page in an incognito window to prevent those resources from affecting your scores.
- The page may not be loading as expected because your test URL (http://localhost:4000/feed) was redirected to http://localhost:4000/feed/. Try testing the second URL directly.



## Performance

Values are estimated and may vary. The <u>performance score is calculated</u> directly from these metrics. <u>See calculator.</u>

**▲** 0–49 50–89 90–100

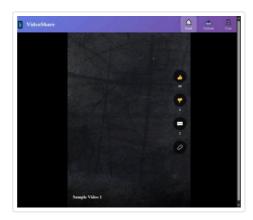

about:blank 1/36

.

METRICS Expand view

First Contentful Paint

0.8 s

Largest Contentful Paint

0.9 s

Total Blocking Time

30 ms

**Cumulative Layout Shift** 

0

Speed Index

0.9 s





Later this year, insights will replace performance audits. <u>Learn more and provide feedback</u>

Try insights

<u>here</u>.

Show audits relevant to: All FCP LCP TBT CLS

## DIAGNOSTICS

▲ Enable text compression — Est savings of 251 KiB

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. <u>Learn more about text compression</u>. FCP LCP

URL	Transfer Size	Est Savings
localhost 1st Party	366.8 KiB	251.1 KiB
/chunk-U2HEBNT5.js (localhost)	161.0 KiB	107.1 KiB
/chunk-TRYMGPEF.js (localhost)	93.2 KiB	66.6 KiB
/polyfills-B6TNHZQ6.js (localhost)	33.8 KiB	21.7 KiB
/chunk-GBLJV6R3.js (localhost)	22.2 KiB	16.4 KiB

about:blank 2/36

URL	Transfer Size	Est Savings
/chunk-VR726JLD.js (localhost)	20.3 KiB	13.8 KiB
/feed/ (localhost)	14.6 KiB	11.1 KiB
/chunk-URNNZLLD.js (localhost)	11.6 KiB	7.7 KiB
/main-FUE2OV3A.js (localhost)	10.3 KiB	6.8 KiB

## ▲ Avoid multiple page redirects — Est savings of 190 ms

Redirects introduce additional delays before the page can be loaded. Learn how to avoid page redirects. LCP FCP

URL	Time Spent
localhost 1st Party	190 ms
/feed (localhost)	190 ms
/feed/ (localhost)	0 ms

## ▲ Serve images in next-gen formats — Est savings of 110 KiB

about:blank

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. <u>Learn more about modern image formats</u>. <u>FCP</u> <u>LCP</u>

	URL	Resource Size	Est Savings
AdBlocker Ultimate Chrome Extension		101.4 KiB	86.4 KiB
	<pre>chrome- extension://ohahllgiabjaoigichmmfljhkcfi keof/static-web-accessible- resources/bochko.png</pre>	89.3 KiB	77.1 KiB
	<pre>chrome- extension://ohahllgiabjaoigichmmfljhkcfi keof/static-web-accessible- resources/stars.png</pre>	12.0 KiB	9.2 KiB
ds.at		28.7 KiB	12.1 KiB

3/36

	URL	Resource Size	Est Savings
<pre>Ciri</pre>	04/40bd7a64-7614-4724-be79- ee5437267e1b.jpeg (i.ds.at)	28.7 KiB	12.1 KiB
dailygame.at		65.5 KiB	11.2 KiB
<pre>Geralt  <img _ngcontent-ng-c1991951668="" alt="Geralt" class="avatar" src="https://dailygame.at/wp- content/uploads/2022/08/the-witcher-3- wild-hunt-cd"/></pre>	08/the-witcher-3-wild-hunt-cd-projekt-765x470.jpg (dailygame.at)	65.5 KiB	11.2 KiB

▲ Properly size images — Est savings of 92 KiB

Serve images that are appropriately-sized to save cellular data and improve load time. <u>Learn how to size images</u>. FCP LCP



Consider using the BreakpointObserver utility in the Component Dev Kit (CDK) to manage image breakpoints. <u>Learn more</u>.

	URL	Resource Size	Es Saving:
dailygame.at		65.5 KiB	64.3 KiE
Geralt <pre><img _ngcontent-ng-c1991951668="" alt="Geralt" class="avatar" src="https://dailygame.at/wp- content/uploads/2022/08/the- witcher-3-wild-hunt-cd"/></pre>	08/the-witcher-3-wild-hunt-cd-projekt-765x470.jpg (dailygame.at)	65.5 KiB	64.3 KiE
ds.at		28.7 KiB	28.1 Kil
<pre>Ciri</pre>	04/40bd7a64-7614-4724-be79- ee5437267e1b.jpeg (i.ds.at)	28.7 KiB	28.1 Kil

about:blank 4/36

▲ Reduce unused JavaScript — Est savings of 1,393 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. <u>Learn how to reduce unused JavaScript</u>. FCP LCP



If you are using Angular CLI, include source maps in your production build to inspect your bundles. <u>Learn more</u>.

✓ Show 3rd-party resources (5)

	Show sta par	ty resources (5)
URL	Transfer Size	Est Savings
YouTube Summary with ChatGPT & Claude Chrome Extension	1,195.7 KiB	792.8 KiB
chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/user-agent-77bb2fbd.js	384.6 KiB	358.1 KiB
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/firebase-ff85c8b4.js</pre>	395.7 KiB	244.5 KiB
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/user-provider- a77bc62d.js</pre>	214.9 KiB	123.5 KiB
chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/youtube-1196a170.js	200.5 KiB	66.6 KiB
Unattributable	823.3 KiB	475.0 KiB
chrome-extension://bmnlcjabgnpnenekpadlanbbkooimhnj/h1-check.js	731.0 KiB	449.0 KiB
<pre>chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/vendor/@eyeo/webext-ad- filtering-solution/content.js</pre>	92.2 KiB	26.0 KiB
/adblockpluscore/lib/content/elemHideEmulation.js	12.7 KiB	9.8 KiB
//vendor/webextension-polyfill/src/browser-polyfill.js	7.1 KiB	6.7 KiB
/adblockpluscore/lib/patterns.js	3.2 KiB	1.5 KiB
/adblockpluscore/lib/common.js	2.0 KiB	1.5 KiB
/src/content/element-collapsing.js	1.8 KiB	1.3 KiB
localhost 1st Party	254.2 KiB	85.8 KiB
/chunk-U2HEBNT5.js (localhost)	161.0 KiB	53.0 KiB
/chunk-TRYMGPEF.js (localhost)	93.2 KiB	32.8 KiB
AdBlocker Ultimate Chrome Extension	175.4 KiB	39.5 KiB
<pre>chrome-extension://ohahllgiabjaoigichmmfljhkcfikeof/content-scripts.js</pre>	175.4 KiB	39.5 KiB

about:blank 5/36

Minify JavaScript — Est savings of 229 KiB

Minifying JavaScript files can reduce payload sizes and script parse time. <u>Learn how to minify JavaScript</u>. FCP LCP

✓ Show 3rd-party resources (1)

URL	Transfer Size	Est Savings
Unattributable	199.8 KiB	119.3 KiB
<pre>chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/vendor/@eyeo/webext-ad- filtering-solution/content.js</pre>	92.2 KiB	75.0 KiB
chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/globals-front.js	26.9 KiB	14.6 KiB
chrome-extension://cmedhionkhpnakcndndgjdbohmhepckk/contentscript.js	33.2 KiB	5.9 KiB
chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/polyfill.js	10.6 KiB	5.7 KiB
chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/polyfill.js	10.6 KiB	5.7 KiB
<pre>chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/cookie-banner- detection.preload.js</pre>	10.3 KiB	5.5 KiB
chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/adblock-picreplacement.js	9.1 KiB	3.8 KiB
<pre>chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/adblock-functions.js</pre>	6.9 KiB	3.2 KiB
YouTube Summary with ChatGPT & Claude Chrome Extension	395.7 KiB	110.1 KiB
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/firebase-ff85c8b4.js</pre>	395.7 KiB	110.1 KiB

Serve static assets with an efficient cache policy — 1 resource found

A long cache lifetime can speed up repeat visits to your page. Learn more about efficient cache policies.

URL	Cache TTL	Transfer Size
dailygame.at		66 KiB
08/the-witcher-3-wild-hunt-cd-projekt-765x470.jpg (dailygame.at)	30d	66 KiB

about:blank 6/36

Does not use passive listeners to improve scrolling performance

Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. <u>Learn more about adopting passive event listeners</u>.

Source

localhost 1st Party

polyfills-B6TNHZQ6.js:1

Eliminate render-blocking resources — Est savings of 0 ms

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. <u>Learn how to eliminate render-blocking resources</u>. FCP [LCP]

URL	Transfer Size	Est Savings
localhost (1st Party)	0.3 KiB	70 ms
/styles-5INURTSO.css (localhost)	0.3 KiB	70 ms

Remove duplicate modules in JavaScript bundles — Est savings of 21 KiB

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP

Source	Transfer Size	Est Savings
node_modules/webextension-polyfill		20 KiB
chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/polyfill.js	10 KiB	
<pre>chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/cookie-banner- detection.preload.js</pre>	10 KiB	
chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/globals-front.js	10 KiB	
chrome-extension://gighmmpiobklfepjocnamgkkbiglidom/polyfill.js	10 KiB	

Avoid serving legacy JavaScript to modern browsers — Est savings of 1 KiB

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile <u>Baseline</u> features, unless you know you must

about:blank 7/36

support legacy browsers. Learn why most sites can deploy ES6+ code without transpiling FCP LCP



Avoid enormous network payloads — Total size was 3,794 KiB

Large network payloads cost users real money and are highly correlated with long load times. <u>Learn how to reduce payload sizes</u>.



Apply <u>route-level code splitting</u> to minimize the size of your JavaScript bundles. Also, consider precaching assets with the <u>Angular service worker</u>.

✓ Show 3rd-party resources (4)

URL	Transfer Size
videezy.com	3,312.1 KiB
original/playing_in_the_blackboard.mp4 (static.videezy.com)	1,728.8 KiB
original/playing_in_the_blackboard.mp4 (static.videezy.com)	1,583.3 KiB
localhost (1st Party)	347.1 KiB
/chunk-U2HEBNT5.js (localhost)	161.3 KiB
/chunk-TRYMGPEF.js (localhost)	93.5 KiB
/polyfills-B6TNHZQ6.js (localhost)	34.1 KiB
/chunk-GBLJV6R3.js (localhost)	22.5 KiB
/chunk-VR726JLD.js (localhost)	20.6 KiB
/favicon.ico (localhost)	15.0 KiB
dailygame.at	65.9 KiB

about:blank 8/36

URL	Transfer Size
08/the-witcher-3-wild-hunt-cd-projekt-765x470.jpg (dailygame.at)	65.9 KiB
ds.at	29.2 KiB
04/40bd7a64-7614-4724-be79-ee5437267e1b.jpeg (i.ds.at)	29.2 KiB

## O Avoid long main-thread tasks — 5 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. <u>Learn how to avoid long main-thread tasks</u> (TBT)

URL	Start Time	Duration
Unattributable		360 ms
chrome-extension://bmnlcjabgnpnenekpadlanbbkooimhnj/h1-check.js	576 ms	292 ms
Unattributable	885 ms	68 ms
localhost 1st Party		314 ms
/feed/ (localhost)	364 ms	179 ms
/chunk-U2HEBNT5.js (localhost)	953 ms	79 ms
/feed/ (localhost)	308 ms	56 ms

## O User Timing marks and measures — 41 user timings

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. <u>Learn more about User Timing marks</u>.

Name	Туре	Start Time	Duration
Zone	Measure	402.81 ms	0.51 ms
Zone:ZoneAwarePromise	Measure	403.57 ms	1.00 ms
Zone:toString	Measure	404.68 ms	0.14 ms
Zone:util	Measure	404.92 ms	0.52 ms

Name	Туре	Start Time	Duration
Zone:legacy	Measure	405.68 ms	0.11 ms
Zone:timers	Measure	405.81 ms	0.46 ms
Zone:requestAnimationFrame	Measure	406.31 ms	0.32 ms
Zone:blocking	Measure	406.74 ms	0.72 ms
Zone:EventTarget	Measure	407.55 ms	2.36 ms
Zone:MutationObserver	Measure	409.98 ms	0.66 ms
Zone:IntersectionObserver	Measure	410.74 ms	0.72 ms
Zone:FileReader	Measure	411.56 ms	0.48 ms
Zone:on_property	Measure	412.10 ms	29.91 ms
Zone:customElements	Measure	442.10 ms	0.52 ms
Zone:XHR	Measure	442.65 ms	0.51 ms
Zone:geolocation	Measure	443.19 ms	0.25 ms
Zone:PromiseRejectionEvent	Measure	443.47 ms	0.14 ms
Zone:queueMicrotask	Measure	443.64 ms	0.12 ms
Zone	Mark	402.81 ms	
Zone:ZoneAwarePromise	Mark	403.57 ms	
Zone:toString	Mark	404.68 ms	
Zone:util	Mark	404.92 ms	
Zone:legacy	Mark	405.68 ms	
Zone:timers	Mark	405.81 ms	
Zone:requestAnimationFrame	Mark	406.31 ms	
Zone:blocking	Mark	406.74 ms	

about:blank 10/36

Name	Туре	Start Time	Duration
Zone:EventTarget	Mark	407.55 ms	
Zone:MutationObserver	Mark	409.98 ms	
Zone:IntersectionObserver	Mark	410.74 ms	
Zone:FileReader	Mark	411.56 ms	
Zone:on_property	Mark	412.10 ms	
Zone:customElements	Mark	442.10 ms	
Zone:XHR	Mark	442.65 ms	
Zone:geolocation	Mark	443.19 ms	
Zone:PromiseRejectionEvent	Mark	443.47 ms	
Zone:queueMicrotask	Mark	443.64 ms	
mark_feature_usage	Mark	459.29 ms	
mark_feature_usage	Mark	463.07 ms	
mark_feature_usage	Mark	465.69 ms	
mark_feature_usage	Mark	466.07 ms	
mark_feature_usage	Mark	494.40 ms	

• Avoid non-composited animations — 1 animated element found

Animations which are not composited can be janky and increase CLS. <u>Learn how to avoid non-composited animations</u> <u>CLS</u>

Element		Name
	Feed <a _ngcontent-ng-c2193908431="" class="nav-link active" href="/feed" routerlink="/feed" routerlinkactive="active"></a>	
Unsupported CSS Pro	oerty: background-color	background- color

Element	Name
Unsupported CSS Property: background-color	background- color
Unsupported CSS Property: color	color
Unsupported CSS Property: color	color
Unsupported CSS Property: box-shadow	box-shadow
Unsupported CSS Property: box-shadow	box-shadow

## Avoid chaining critical requests — 3 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. Learn how to avoid chaining critical requests.

Maximum critical path latency: 205.866 ms

Initial Navigation

/feed (localhost)

/feed/ (localhost)

/styles-5INURTSO.css (localhost) - 58.392 ms, 0.31 KiB

/polyfills-B6TNHZQ6.js (localhost) - 66.142 ms, 34.10 KiB

/main-FUE2OV3A.js (localhost) - 74.385 ms, 10.58 KiB

### Minimize third-party usage — Third-party code blocked the main thread for 0 ms

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. <u>Learn how to minimize third-party impact</u>. <u>TBT</u>

Third-Party	Transfer Size	Main-Thread Blocking Time
videezy.com	3,312 KiB	0 ms
original/playing_in_the_blackboard.mp4 (static.videezy.com)	3,312 KiB	0 ms
YouTube Summary with ChatGPT & Claude Chrome Extension	1,240 KiB	0 ms
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/firebase- ff85c8b4.js</pre>	396 KiB	0 ms
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/user-agent- 77bb2fbd.js</pre>	385 KiB	0 ms
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/user-provider- a77bc62d.js</pre>	223 KiB	0 ms
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/youtube- 1196a170.js</pre>	218 KiB	0 ms

about:blank 12/36

Third-Party	Transfer Size	Main-Thread Blocking Time
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/browser-polyfill- 45feeee0.js</pre>	10 KiB	0 ms
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/web-helper.ts- 3e4f24a2.js</pre>	7 KiB	0 ms
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/default-user- config-0931cd17.js</pre>	1 KiB	0 ms
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/storage- 49d9ffd2.js</pre>	0 KiB	0 ms
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/use-form- 3c7c4ac2.js</pre>	0 KiB	0 ms
<pre>chrome-extension://nmmicjeknamkfloonkhhcjmomieiodli/assets/get-user-config- 4bb207c7.js</pre>	0 KiB	0 ms
AdBlocker Ultimate Chrome Extension	114 KiB	0 ms
<pre>chrome-extension://ohahllgiabjaoigichmmfljhkcfikeof/static-web-accessible- resources/bochko.png</pre>	89 KiB	0 ms
<pre>chrome-extension://ohahllgiabjaoigichmmfljhkcfikeof/static-web-accessible- resources/logo.png</pre>	12 KiB	0 ms
<pre>chrome-extension://ohahllgiabjaoigichmmfljhkcfikeof/static-web-accessible- resources/stars.png</pre>	12 KiB	0 ms
dailygame.at	66 KiB	0 ms
08/the-witcher-3-wild-hunt-cd-projekt-765x470.jpg (dailygame.at)	66 KiB	0 ms
ds.at	29 KiB	0 ms
04/40bd7a64-7614-4724-be79-ee5437267e1b.jpeg (i.ds.at)	29 KiB	0 ms

## O Largest Contentful Paint element — 940 ms

This is the largest contentful element painted within the viewport. <u>Learn more about the Largest Contentful Paint element</u> [LCP]



about:blank 13/36

Phase	% of LCP	Timing
TTFB	16%	150 ms
Load Delay	0%	0 ms
Load Time	0%	0 ms
Render Delay	84%	790 ms

More information about the performance of your application. These numbers don't <u>directly affect</u> the Performance score.

PASSED AUDITS (20)	Hide
Defer offscreen images	^
Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. <u>Learn how to defer offscreen images</u> . FCP LCP	
Minify CSS	^
Minifying CSS files can reduce network payload sizes. <u>Learn how to minify CSS</u> . FCP LCP	
Reduce unused CSS	^
Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consume network activity. <u>Learn how to reduce unused CSS</u> . <u>FCP</u> <u>LCP</u>	ed by
Efficiently encode images	^
Optimized images load faster and consume less cellular data. <u>Learn how to efficiently encode images</u> . FCP <u>LCP</u>	
Preconnect to required origins	^
Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-part origins. Learn how to preconnect to required origins. LCP FCP	у
Initial server response time was short — Root document took 10 ms	^
Keep the server response time for the main document short because all other requests depend on it. <u>Learn more abo</u>	out the

about:blank 14/36

Time to First Byte metric. FCP LCP

URL	Time Spent
localhost 1st Party	10 ms
/feed/ (localhost)	10 ms

Use HTTP/2

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. <u>Learn more about HTTP/2</u>. <u>[CP]</u>

Use video formats for animated content

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. <u>Learn more about efficient video formats FCP (LCP)</u>

Preload Largest Contentful Paint image


If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. <u>Learn more about preloading LCP elements</u>. <u>[LCP]</u>

Avoids an excessive DOM size — 67 elements

A large DOM will increase memory usage, cause longer <u>style calculations</u>, and produce costly <u>layout reflows</u>. <u>Learn how to avoid an excessive DOM size</u>. (TBT)



Consider virtual scrolling with the Component Dev Kit (CDK) if very large lists are being rendered. Learn more.

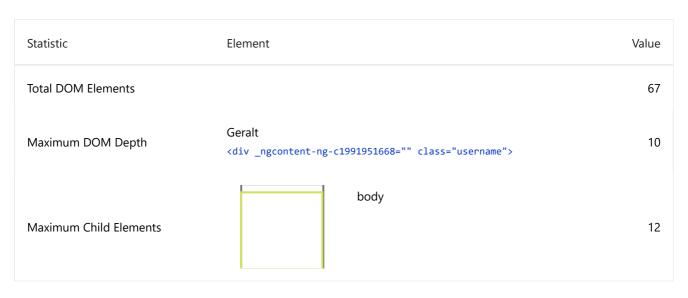

JavaScript execution time — 0.6 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to reduce Javascript execution time. TBT

about:blank 15/36

URL	Total CPU Time	Script Evaluation	Script Parse
Unattributable	581 ms	234 ms	122 ms
chrome-extension://bmnlcjabgnpnenekpadlanbbkooimhnj/h1-check.js	299 ms	157 ms	122 ms
Unattributable	282 ms	77 ms	0 ms
localhost 1st Party	473 ms	165 ms	92 ms
/feed/ (localhost)	359 ms	75 ms	91 ms
/chunk-U2HEBNT5.js (localhost)	114 ms	90 ms	0 ms

Minimizes main-thread work — 1.2 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. <u>Learn how to minimize main-thread work</u> (TBT)

Category	Time Spent
Script Evaluation	418 ms
Other	368 ms
Script Parsing & Compilation	290 ms
Style & Layout	64 ms
Parse HTML & CSS	40 ms
Rendering	6 ms
Garbage Collection	3 ms

All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. <u>Learn more about font-display</u>.

O Lazy load third-party resources with facades

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. Learn how to

about:blank 16/36

defer third-parties with a facade. (TBT)

Largest Contentful Paint image was not lazily loaded

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. <u>Learn more about optimal lazy loading.</u> [LCP]

Avoid large layout shifts

These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to <u>windowing</u>. <u>Learn how to improve CLS</u> (CLS)

Avoids document.write()

For users on slow connections, external scripts dynamically injected via document.write() can delay page load by tens of seconds. Learn how to avoid document.write().

Image elements have explicit width and height

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. <u>Learn how to set image</u> <u>dimensions</u> (CLS)

Has a <meta name="viewport"> tag with width or initial-scale

A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag.

Page didn't prevent back/forward cache restoration

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. <u>Learn more about the bfcache</u>



## **Accessibility**


These checks highlight opportunities to <u>improve the accessibility of your web app</u>. Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so <u>manual testing</u> is also encouraged.

AUDIO AND VIDEO

about:blank 17/36

video> elements contain a <track> element with [kind="captions"]

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. <u>Learn more about video captions</u>.

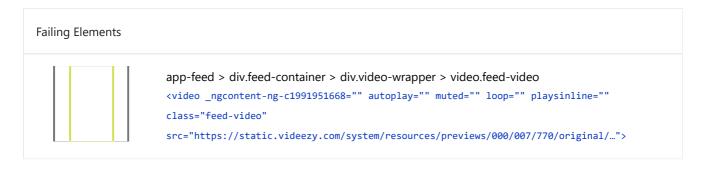

These are opportunities to provide alternative content for audio and video. This may improve the experience for users with hearing or vision impairments.

# ADDITIONAL ITEMS TO MANUALLY CHECK (10)

Interactive controls are keyboard focusable

Custom interactive controls are keyboard focusable and display a focus indicator. <u>Learn how to make custom controls</u> <u>focusable</u>.

O Interactive elements indicate their purpose and state

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. Learn how to decorate interactive elements with affordance hints.

The page has a logical tab order

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. <u>Learn more about logical tab ordering.</u>

Visual order on the page follows DOM order

DOM order matches the visual order, improving navigation for assistive technology. <u>Learn more about DOM and visual ordering</u>.

User focus is not accidentally trapped in a region

A user can tab into and out of any control or region without accidentally trapping their focus. <u>Learn how to avoid focus traps</u>.

O The user's focus is directed to new content added to the page

about:blank 18/36

Hide

. .

^

If new content, such as a dialog, is added to the page, the user's focus is directed to it. <u>Learn how to direct focus to new content</u>.

 HTML5 landmark elements are used to improve navigation Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements. Offscreen content is hidden from assistive technology Offscreen content is hidden with display: none or aria-hidden=true. Learn how to properly hide offscreen content. Custom controls have associated labels Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. Learn more about custom controls and labels. Custom controls have ARIA roles Custom interactive controls have appropriate ARIA roles. Learn how to add roles to custom controls. These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibility review. PASSED AUDITS (13) Hide [aria-hidden="true"] is not present on the document <body> Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <body>. Learn how aria-hidden affects the document body. Buttons have an accessible name When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. Learn how to make buttons more accessible. Image elements have [alt] attributes Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute. [user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5.

about:blank 19/36

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. <u>Learn more about the viewport meta tag.</u>

Background and foreground colors have a sufficient contrast ratio

Low-contrast text is difficult or impossible for many users to read. Learn how to provide sufficient color contrast.

Document has a <title> element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more about document titles.

<html> element has a [lang] attribute

If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. <u>Learn more about the lang attribute</u>.

<html> element has a valid value for its [lang] attribute

Specifying a valid <u>BCP 47 language</u> helps screen readers announce text properly. <u>Learn how to use the lang attribute</u>.

Form elements have associated labels

Labels ensure that form controls are announced properly by assistive technologies, like screen readers. <u>Learn more about form element labels</u>.

Links have a discernible name

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. <u>Learn how to make links accessible</u>.

Touch targets have sufficient size and spacing.

Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. <u>Learn more about touch targets</u>.

Heading elements appear in a sequentially-descending order

Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. <u>Learn more about heading order</u>.

Image elements do not have [alt] attributes that are redundant text.

about:blank 20/36

Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the alt attribute.

NOT APPLICABLE (43)	Hide
O [accesskey] values are unique	^
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. <u>Learn moabout access keys</u> .	<u>re</u>
O [aria-*] attributes match their roles	^
Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Le	<u>earn</u>
Uses ARIA roles only on compatible elements	^
Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. <u>Learn more about ARIA roles</u> .	е
button, link, and menuitem elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable users who rely on screen readers. <u>Learn how to make command elements more accessible</u> .	e for
ARIA attributes are used as specified for the element's role	^
Some ARIA attributes are only allowed on an element under certain conditions. <u>Learn more about conditional ARIA attributes</u> .	
O Deprecated ARIA roles were not used	^
Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles	<u>s</u> .
Elements with role="dialog" Or role="alertdialog" have accessible names.	^
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. <u>Learn how to make ARIA dialog elements more accessible</u> .	
O [aria-hidden="true"] elements do not contain focusable descendents	^
Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available.	able

to users of assistive technologies like screen readers. <u>Learn how aria-hidden affects focusable elements</u>.

about:blank 21/36

ARIA input fields have accessible names	^
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusal for users who rely on screen readers. <u>Learn more about input field labels</u> .	ble
ARIA meter elements have accessible names	^
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name meter elements</u> .	
ARIA progressbar elements have accessible names	^
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making unusable for users who rely on screen readers. <u>Learn how to label progressbar elements</u> .	ng it
Elements use only permitted ARIA attributes	^
Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to use of assistive technologies. Learn more about prohibited ARIA roles.	ısers
O [role]s have all required [aria-*] attributes	^
Some ARIA roles have required attributes that describe the state of the element to screen readers. <u>Learn more about ro</u> <u>and required attributes</u> .	<u>les</u>
Elements with an ARIA [role] that require children to contain a specific [role] have all required children.	^
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. <u>Learn more at roles and required children elements</u> .	<u>bout</u>
• [role]s are contained by their required parent element	^
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility function Learn more about ARIA roles and required parent element.	ons.
O [role] values are valid	^
ARIA roles must have valid values in order to perform their intended accessibility functions. <u>Learn more about valid ARIA roles</u> .	<u>A</u>
Elements with the role=text attribute do not have focusable descendents.	^
Adding role=text around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's	

focusable descendents will not be announced. <u>Learn more about the role=text attribute</u>.

about:blank 22/36

O ARIA toggle fields have accessible names	^
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unus for users who rely on screen readers. <u>Learn more about toggle fields</u> .	able
ARIA tooltip elements have accessible names	^
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name tooltip elements</u> .	
O ARIA treeitem elements have accessible names	^
When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making unusable for users who rely on screen readers. <u>Learn more about labeling treeitem elements</u> .	it
O [aria-*] attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. <u>Learn more about valid values</u> .	<u>alues</u>
O [aria-*] attributes are valid and not misspelled	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. <u>Learn more about valid Aattributes</u> .	<u>ıRIA</u>
The page contains a heading, skip link, or landmark region	^
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more about by blocks.	<u>(pass</u>
O <dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements.</td><td>^</td></tr><tr><td>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. <u>Learn has tructure definition lists correctly.</u></td><td>now to</td></tr><tr><td>O Definition list items are wrapped in <dl> elements</td><td>^</td></tr><tr><td>Definition list items (<dt> and <dd>) must be wrapped in a parent <dl> element to ensure that screen readers can pro announce them. <u>Learn how to structure definition lists correctly</u>.</td><td>perly</td></tr><tr><td>O ARIA IDs are unique</td><td>^</td></tr><tr><td>The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies.</td><td><u>earn</u></td></tr></tbody></table></script></dd></dt></dl>	

how to fix duplicate ARIA IDs.

about:blank 23/36

O No form fields have multiple labels	^
Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use ethe first, the last, or all of the labels. <u>Learn how to use form labels</u> .	either
O <frame/> Or <iframe> elements have a title</iframe>	^
Screen reader users rely on frame titles to describe the contents of frames. <u>Learn more about frame titles</u> .	
O <html> element has an [xml:lang] attribute with the same base language as the [lang] attribute.</html>	^
If the webpage does not specify a consistent language, then the screen reader might not announce the page's text corr Learn more about the lang attribute.	rectly.
Input buttons have discernible text.	^
Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the inbutton. Learn more about input buttons.	nput
<pre>O <input type="image"/> elements have [alt] text</pre>	^
When an image is being used as an <input/> button, providing alternative text can help screen reader users understand purpose of the button. Learn about input image alt text.	d the
Links are distinguishable without relying on color.	^
Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience tusers with low vision. Learn how to make links distinguishable.	for
O Lists contain only <li>elements and script supporting elements (<script> and <template>).</td><td>^</td></tr><tr><td>Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. <u>Learn nabout proper list structure</u>.</td><td><u>nore</u></td></tr><tr><td>O List items (<li>) are contained within <ul>, <ol> or <menu> parent elements</td><td>^</td></tr><tr><td>Screen readers require list items (<li>) to be contained within a parent <ul>, <ol> or <menu> to be announced proper <a href="Learn more about proper list structure">Learn more about proper list structure</a>.</td><td>·ly.</td></tr><tr><td>The document does not use <meta http-equiv="refresh"></td><td>^</td></tr><tr><td>Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This macreate a frustrating or confusing experience. Learn more about the refresh meta tag.</td><td>ıy</td></tr></tbody></table></script></li>	

about:blank 24/36


O <object> elements have alternate text</object>	^
Screen readers cannot translate non-text content. Adding alternate text to <object> elements helps screen read meaning to users. Learn more about alt text for object elements.</object>	ders convey
O Select elements have associated label elements.	^
Form elements without effective labels can create frustrating experiences for screen reader users. <u>Learn more abselect element</u> .	out the
O Skip links are focusable.	^
Including a skip link can help users skip to the main content to save time. <u>Learn more about skip links</u> .	
O No element has a [tabindex] value greater than 0	^
A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrexperiences for users who rely on assistive technologies. <u>Learn more about the tabindex attribute</u> .	rating
O Tables have different content in the summary attribute and <caption>.</caption>	^
The summary attribute should describe the table structure, while <caption> should have the onscreen title. Acc mark-up helps users of screen readers. Learn more about summary and caption.</caption>	urate table
O Cells in a  element that use the [headers] attribute refer to table cells within the same table.	^
Screen readers have features to make navigating tables easier. Ensuring  cells using the [headers] attribut to other cells in the same table may improve the experience for screen reader users. Learn more about the head attribute.	-
O  elements and elements with [role="columnheader"/"rowheader"] have data cells they describe.	^
Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of improve the experience for screen reader users. <u>Learn more about table headers</u> .	of cells may
O [lang] attributes have a valid value	^
Specifying a valid <u>BCP 47 language</u> on elements helps ensure that text is pronounced correctly by a screen reade	er. <u>Learn</u>

about:blank 25/36



## **Best Practices**

#### **GENERAL**

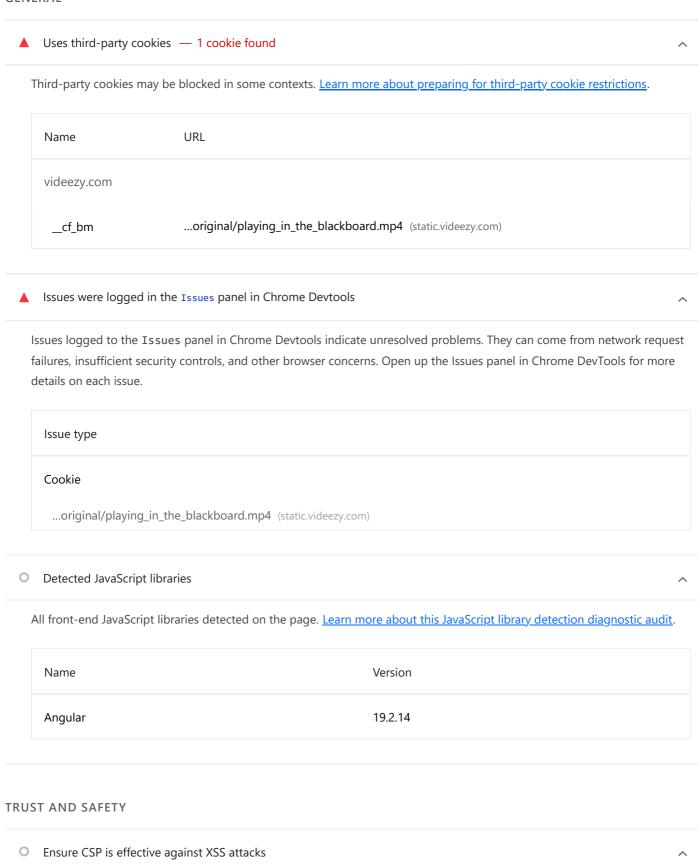

about:blank 26/36

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. <u>Learn how to use a CSP to prevent XSS</u>

Description	Directive	Severity
No CSP found in enforcement mode		High
Use a strong HSTS policy		
-	ntly reduces the risk of downgrading HTTP cor x-age is recommended. <u>Learn more about usir</u>	· · · -
Description	Directive	Severity
No HSTS header found		High
Ensure proper origin isolation with COC	)P	
The Cross-Origin-Opener-Policy (COOP) c ups. <u>Learn more about deploying the COC</u>	an be used to isolate the top-level window fro	om other documents such as pop-
		om other documents such as pop-
ups. <u>Learn more about deploying the COC</u>	DP header.	
ups. <u>Learn more about deploying the COC</u> Description	DP header.	Severity
ups. Learn more about deploying the COC  Description  No COOP header found  Mitigate clickjacking with XFO or CSP  The X-Frame-Options (XFO) header or the	Directive  Directive  These can mitigate clickjacking attacks by bloc	Severity  High Security-Policy (CSP) header
ups. Learn more about deploying the COC  Description  No COOP header found  Mitigate clickjacking with XFO or CSP  The X-Frame-Options (XFO) header or the control where a page can be embedded. To	Directive  Directive  These can mitigate clickjacking attacks by bloc	Severity  High Security-Policy (CSP) header

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding <u>mixed content</u>, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders

Uses HTTPS

about:blank 27/36

from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. <u>Learn more about HTTPS</u>.

Avoids deprecated APIs Deprecated APIs will eventually be removed from the browser. Learn more about deprecated APIs. Allows users to paste into input fields Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. Learn more about user-friendly input fields. Avoids requesting the geolocation permission on page load Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. Learn more about the geolocation permission. Avoids requesting the notification permission on page load Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more about responsibly getting permission for notifications. Displays images with correct aspect ratio Image display dimensions should match natural aspect ratio. Learn more about image aspect ratio. Serves images with appropriate resolution Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn how to provide responsive images. Has a <meta name="viewport"> tag with width or initial-scale A <meta name="viewport"> not only optimizes your app for mobile screen sizes, but also prevents a 300 millisecond delay to user input. Learn more about using the viewport meta tag. Page has the HTML doctype Specifying a doctype prevents the browser from switching to quirks-mode. Learn more about the doctype declaration. Properly defines charset A character encoding declaration is required. It can be done with a <meta> tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more about declaring the character encoding.

about:blank 28/36

No browser errors logged to the console

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. <u>Learn more about this errors in console diagnostic audit</u>

Page has valid source maps

^

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. <u>Learn more about source maps</u>.

URL	Map URL
<pre>chrome- extension://gighmmpiobklfepjocnamgkkbiglidom/vendor/@eye o/webext-ad-filtering-solution/content.js</pre>	
<pre>chrome- extension://gighmmpiobklfepjocnamgkkbiglidom/polyfill.js</pre>	<pre>chrome- extension://gighmmpiobklfepjocnamgkkbiglidom/polyfil l.js.map</pre>
<pre>chrome- extension://gighmmpiobklfepjocnamgkkbiglidom/polyfill.js</pre>	<pre>chrome- extension://gighmmpiobklfepjocnamgkkbiglidom/polyfil 1.js.map</pre>
<pre>chrome- extension://gighmmpiobklfepjocnamgkkbiglidom/globals- front.js</pre>	<pre>chrome- extension://gighmmpiobklfepjocnamgkkbiglidom/globals -front.js.map</pre>
<pre>chrome- extension://gighmmpiobklfepjocnamgkkbiglidom/cookie- banner-detection.preload.js</pre>	<pre>chrome- extension://gighmmpiobklfepjocnamgkkbiglidom/cookie- banner-detection.preload.js.map</pre>

NOT APPLICABLE (2)

Redirects HTTP traffic to HTTPS

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. Learn more.

Document uses legible font sizes

Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive to have >60% of page text ≥12px. Learn more about legible font sizes.

about:blank 29/36



## **SEO**

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on <a href="Core Web Vitals">Core Web Vitals</a>. Learn more about Google Search Essentials.

#### CONTENT BEST PRACTICES

▲ Document does not have a meta description

Meta descriptions may be included in search results to concisely summarize page content. <u>Learn more about the meta description</u>.

Format your HTML in a way that enables crawlers to better understand your app's content.

### CRAWLING AND INDEXING

▲ robots.txt is not valid — 14 errors found

If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. <u>Learn more about robots.txt</u>.

Line #	Content	Error
1	html <html data-beasties-container="" lang="en"><head></head></html>	Syntax not understood
2	<meta charset="utf-8"/>	Syntax not understood
3	<title>Frontend</title>	Syntax not understood
4	<base href="/"/>	Syntax not understood
5	<meta content="width=device-width, initial-scale=1" name="viewport"/>	Syntax not understood
6	<pre><link href="favicon.ico" rel="icon" type="image/x-icon"/></pre>	Syntax not understood

about:blank 30/36

Line #	Content	Error
7	<pre><link href="manifest.webmanifest" rel="manifest"/></pre>	Syntax not understood
8	<pre><link href="styles-5INURTSO.css" rel="stylesheet"/><style ng-app-<="" pre=""></td><td>Unknown</td></tr><tr><td></td><td>id="ng">.navbar[_ngcontent-ng-c2193908431]{background:linear-</td><td>directive</td></tr><tr><td></td><td><pre>gradient(135deg,#667eea,#764ba2);color:#fff;padding:0;position:fixed;top:0;left:</pre></td><td></td></tr><tr><td></td><td>0;right:0;z-index:1000;box-shadow:0 2px 10px #0000001a}.navbar[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] .nav-container[_ngcontent-ng-c2193908431]{max-width:1200px;margin:0</td><td></td></tr><tr><td></td><td><pre>auto;display:flex;justify-content:space-between;align-</pre></td><td></td></tr><tr><td></td><td><pre>items:center}.navbar[_ngcontent-ng-c2193908431] .nav-container[_ngcontent-ng-</pre></td><td></td></tr><tr><td></td><td>c2193908431] .nav-brand[_ngcontent-ng-c2193908431]{display:flex;align-</td><td></td></tr><tr><td></td><td>items:center;gap:.75rem}.navbar[_ngcontent-ng-c2193908431] .nav-</td><td></td></tr><tr><td></td><td>container[_ngcontent-ng-c2193908431] .nav-brand[_ngcontent-ng-c2193908431]</td><td></td></tr><tr><td></td><td>.logo[_ngcontent-ng-c2193908431]{font-size:1.5rem;filter:drop-shadow(0 2px 4px</td><td></td></tr><tr><td></td><td>rgba(0,0,0,.2))}.navbar[_ngcontent-ng-c2193908431] .nav-container[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] .nav-brand[_ngcontent-ng-c2193908431] .app-name[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431]{font-size:1.25rem;font-weight:600;letter-</td><td></td></tr><tr><td></td><td>spacing:.5px}.navbar[_ngcontent-ng-c2193908431] .nav-container[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] .nav-links[_ngcontent-ng-c2193908431]</td><td></td></tr><tr><td></td><td>{display:flex;gap:.5rem}.navbar[_ngcontent-ng-c2193908431] .nav-</td><td></td></tr><tr><td></td><td>container[_ngcontent-ng-c2193908431] .nav-links[_ngcontent-ng-c2193908431] .nav-</td><td></td></tr><tr><td></td><td>link[_ngcontent-ng-c2193908431]{display:flex;flex-direction:column;align-</td><td></td></tr><tr><td></td><td>items:center;padding:.5rem 1rem;text-decoration:none;color:#fffc;border-</td><td></td></tr><tr><td></td><td>radius:8px;transition:all .3s ease;min-width:60px}.navbar[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] .nav-container[_ngcontent-ng-c2193908431] .nav-links[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] .nav-link[_ngcontent-ng-c2193908431] .nav-icon[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431]{font-size:1.2rem;margin-bottom:.25rem}.navbar[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] .nav-container[_ngcontent-ng-c2193908431] .nav-links[_ngcontent-ng-c2193908431] .nav-text[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] font-size:.8rem;font-weight:500}.navbar[_ngcontent-ng-c2193908431]</td><td></td></tr><tr><td></td><td>.nav-container[ ngcontent-ng-c2193908431] .nav-links[ ngcontent-ng-c2193908431]</td><td></td></tr><tr><td></td><td>.nav-link[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431]:hover{background:#ffffff1a;color:#fff;transform:translateY(-1px)}.n</td><td></td></tr><tr><td></td><td>avbar[_ngcontent-ng-c2193908431] .nav-container[_ngcontent-ng-c2193908431] .nav-</td><td></td></tr><tr><td></td><td>links[ ngcontent-ng-c2193908431] .nav-link.active[ ngcontent-ng-c2193908431]</td><td></td></tr><tr><td></td><td>{background:#fff3;color:#fff;box-shadow:0 2px 8px #0003}.main-</td><td></td></tr><tr><td></td><td>content[_ngcontent-ng-c2193908431]{margin-top:80px;min-height:calc(100vh -</td><td></td></tr><tr><td></td><td>80px);background:linear-gradient(to bottom,#f8f9fa,#e9ecef)}@media (max-width:</td><td></td></tr><tr><td></td><td>768px){.navbar[_ngcontent-ng-c2193908431] .nav-container[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431]{padding:.75rem 1rem}.navbar[_ngcontent-ng-c2193908431] .nav-</td><td></td></tr><tr><td></td><td>container[_ngcontent-ng-c2193908431] .nav-brand[_ngcontent-ng-c2193908431] .app-</td><td></td></tr><tr><td></td><td>name[_ngcontent-ng-c2193908431]{display:none}.navbar[_ngcontent-ng-c2193908431]</td><td></td></tr><tr><td></td><td>.nav-container[_ngcontent-ng-c2193908431] .nav-links[_ngcontent-ng-c2193908431]</td><td></td></tr><tr><td></td><td>{gap:.25rem}.navbar[_ngcontent-ng-c2193908431] .nav-container[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] .nav-links[_ngcontent-ng-c2193908431] .nav-link[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431]{padding:.4rem .8rem;min-width:50px}.navbar[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] .nav-container[_ngcontent-ng-c2193908431] .nav-links[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431] .nav-link[_ngcontent-ng-c2193908431] .nav-icon[_ngcontent-ng-</td><td></td></tr><tr><td></td><td>c2193908431]{font-size:1.1rem}.navbar[_ngcontent-ng-c2193908431] .nav-</td><td></td></tr></tbody></table></style></pre>	

about:blank 31/36

Line # Content Error

```
container[_ngcontent-ng-c2193908431] .nav-links[_ngcontent-ng-c2193908431] .nav-
link[ ngcontent-ng-c2193908431] .nav-text[ ngcontent-ng-c2193908431]{font-
size:.7rem}.main-content[_ngcontent-ng-c2193908431]{margin-top:70px;min-
height:calc(100vh - 70px)}}*[_ngcontent-ng-c2193908431]{margin:0;padding:0;box-
sizing:border-box}html[ ngcontent-ng-c2193908431], body[ ngcontent-ng-
c2193908431]{height:100%;font-family:-apple-system,BlinkMacSystemFont,Segoe
UI, Roboto, Oxygen, Ubuntu, Cantarell, sans-serif}</style><style ng-app-
id="ng">.feed-container[_ngcontent-ng-c1991951668]
\{position: fixed; top:0; left:0; width: 100 vw; height: 100 vh; background: \#000; overflow: height: 100 vh; background: #00 vh; background: #00 vh; back
idden;display:flex;justify-content:center;align-items:center}.video-
wrapper[_ngcontent-ng-c1991951668]{position:relative;width:100%;height:100%;max-
width:450px;background:#000;display:flex;justify-content:center;align-
items:center}.feed-video[_ngcontent-ng-c1991951668]
{width:100%;height:100%;object-fit:cover;border-radius:0}.video-overlay-
controls[_ngcontent-ng-c1991951668]
{position:absolute;right:15px;top:50%;transform:translateY(-50%);display:flex;fl
ex-direction:column;gap:20px;z-index:10}.overlay-btn[_ngcontent-ng-c1991951668]
{background:#0009;border:none;border-
radius:50%;width:48px;height:48px;color:#fff;font-
size:20px;cursor:pointer;display:flex;align-items:center;justify-
content:center;transition:all .3s ease;-webkit-backdrop-
filter:blur(10px);backdrop-filter:blur(10px)}.overlay-btn[_ngcontent-ng-
c1991951668]:hover{background:#fff3;transform:scale(1.1)}.overlay-
btn[_ngcontent-ng-c1991951668]:active{transform:scale(.95)}.vote-
count[_ngcontent-ng-c1991951668]{color:#fff;font-size:12px;text-
align:center;margin-top:5px;text-shadow:0 1px 3px rgba(0,0,0,.5);font-
weight:700}.video-info-overlay[_ngcontent-ng-c1991951668]
{position:absolute;bottom:0;left:0;right:0;background:linear-
gradient(transparent,#000000b3);color:#fff;padding:60px 20px;z-
index:10}.video-title[_ngcontent-ng-c1991951668]{font-size:16px;font-
weight:700; margin:0 0 8px; text-shadow:0 1px 3px rgba(0,0,0,.5); line-
height:1.3}.video-description[_ngcontent-ng-c1991951668]{font-
size:14px;opacity:.9;margin:0;text-shadow:0 1px 3px rgba(0,0,0,.5);line-
height:1.4}.play-pause-overlay[_ngcontent-ng-c1991951668]
{position:absolute;inset:0;display:flex;align-items:center;justify-
content:center;background:transparent;border:none;cursor:pointer;z-
index:5}.play-pause-icon[_ngcontent-ng-c1991951668]{background:#0009;border-
radius:50%;width:80px;height:80px;display:flex;align-items:center;justify-
content:center;font-size:30px;color:#fff;opacity:0;transition:opacity .3s ease;-
webkit-backdrop-filter:blur(10px);backdrop-filter:blur(10px)}.play-pause-
icon.show[_ngcontent-ng-c1991951668]{opacity:1}.comments-section[_ngcontent-ng-
c1991951668]{position:absolute;bottom:0;left:0;right:0;max-
height:70vh;background:#000000e6;-webkit-backdrop-filter:blur(20px);backdrop-
filter:blur(20px);border-radius:20px 20px 0
0;padding:20px;transform:translateY(100%);transition:transform .3s ease;z-
index:20}.comments-section.visible[_ngcontent-ng-c1991951668]
{transform:translateY(0)}.comments-header[_ngcontent-ng-c1991951668]
{display:flex;justify-content:space-between;align-items:center;margin-
bottom:20px;color:#fff}.comments-header[_ngcontent-ng-c1991951668]
h3[_ngcontent-ng-c1991951668]{margin:0;font-size:18px}.close-
```

about:blank 32/36

Line # Content Frror comments[\_ngcontent-ng-c1991951668]{background:none;border:none;color:#fff;fontsize:24px;cursor:pointer;padding:5px}.close-comments[\_ngcontent-ngc1991951668]:hover{opacity:.7}.comments-list[\_ngcontent-ng-c1991951668]{maxheight:50vh;overflow-y:auto;margin-bottom:20px}.comment[\_ngcontent-ngc1991951668]{display:flex;margin-bottom:15px;color:#fff}.avatar[\_ngcontent-ngc1991951668]{width:32px;height:32px;border-radius:50%;margin-right:12px;objectfit:cover}.comment-content[\_ngcontent-ng-c1991951668]{flex:1}.comment $content[\_ngcontent-ng-c1991951668] \ . username[\_ngcontent-ng-c1991951668] \{font-ng-c1991951668\} \} \\$ weight:700;font-size:14px;margin-bottom:4px}.comment-content[\_ngcontent-ngc1991951668] .comment-text[\_ngcontent-ng-c1991951668]{font-size:14px;lineheight:1.4;margin:0}.add-comment[\_ngcontent-ng-c1991951668] {display:flex;gap:10px;align-items:center}.add-comment[\_ngcontent-ngc1991951668] input[\_ngcontent-ng-c1991951668]{flex:1;padding:12px 16px;borderradius:25px;border:1px solid rgba(255,255,255,.3);background:#ffffff1a;color:#fff;font-size:14px}.addcomment[\_ngcontent-ng-c1991951668] input[\_ngcontent-ngc1991951668]::placeholder{color:#ffffffb3}.add-comment[\_ngcontent-ngc1991951668] input[\_ngcontent-ng-c1991951668]:focus{outline:none;bordercolor:#ffffff80}.add-comment[\_ngcontent-ng-c1991951668] button[\_ngcontent-ngc1991951668]{background:#ff3040;color:#fff;border:none;padding:10px 20px;borderradius:20px;cursor:pointer;font-weight:700}.add-comment[\_ngcontent-ngc1991951668] button[\_ngcontent-ng-c1991951668]:disabled{opacity:.5;cursor:notallowed}.add-comment[\_ngcontent-ng-c1991951668] button[\_ngcontent-ngc1991951668]:hover:not(:disabled){background:#e02d3c}@media (max-width: 768px) {.video-wrapper[\_ngcontent-ng-c1991951668]{max-width:100%}.video-overlay $controls [\_ngcontent-ng-c1991951668] \{ right: 10px; gap: 15px \}. overlay-btn [\_ngcontent-ng-c1991951668] \} \\$ ng-c1991951668]{width:44px;height:44px;font-size:18px}.video-infooverlay[\_ngcontent-ng-c1991951668]{padding:40px 15px 15px}.videotitle[\_ngcontent-ng-c1991951668]{font-size:15px}.video-description[\_ngcontentng-c1991951668]{font-size:13px}}</style></head> <body><!--nghm--><script type="text/javascript" id="ng-event-dispatch-contract"> (()=>{function p(t,n,r,o,e,i,f,m) {return{eventType:t,event:n,targetElement:r,eic:o,timeStamp:e,eia:i,eirp:f,eiack :m}}function u(t){let n=[],r=e=>n.push(e)};return{c:t,q:n,et:[],etc: Unknown 9 [],d:r,h:e=>{r(p(e.type,e,e.target,t,Date.now()))}}}function s(t,n,r){for(let directive o=0;o<n.length;o++){let e=n[o];(r?  $\texttt{t.etc:t.et).push(e),t.c.addEventListener(e,t.h,r)} \} \\ \texttt{function c(t,n,r,o,e=window)}$ {let i=u(t);e.\_ejsas||(e.\_ejsas= {}),e.\_ejsas[n]=i,s(i,r),s(i,o,!0)}window.\_\_jsaction\_bootstrap=c;})(); </script><script>window.\_\_jsaction\_bootstrap(document.body,"ng", Syntax not ["click", "wheel", "touchstart", "touchend", "input", "compositionstart", "composition 10 understood end"],["blur"]);</script> <app-root ng-version="19.2.14" \_nghost-ng-c2193908431 ngh="1" ng-server-</pre> 11 Unknown context="ssr"><nav \_ngcontent-ng-c2193908431 class="navbar"><div \_ngcontent-ngdirective c2193908431 class="nav-container"><div \_ngcontent-ng-c2193908431 class="navbrand"><div \_ngcontent-ng-c2193908431 class="logo"> !</div><span \_ngcontent-ng-</pre>

about:blank 33/36

Line # Content Error

c2193908431 class="app-name">VideoShare</span></div><div \_ngcontent-ngc2193908431 class="nav-links"><a ngcontent-ng-c2193908431 routerlink="/feed" routerlinkactive="active" class="nav-link active" href="/feed" jsaction="click:;"><span \_ngcontent-ng-c2193908431 class="nav-icon"><a>(</a></span> <span ngcontent-ng-c2193908431 class="nav-text">Feed</span></a> ngcontentng-c2193908431 routerlink="/upload" routerlinkactive="active" class="nav-link" href="/upload" jsaction="click:;"><span \_ngcontent-ng-c2193908431 class="nav-</a><a \_ngcontent-ng-c2193908431 routerlink="/user" routerlinkactive="active"</pre> class="nav-link" href="/user" jsaction="click:;"><span ngcontent-ng-c2193908431 class="nav-icon"> 2</span><span \_ngcontent-ng-c2193908431 class="navtext">User</span></a></div></nav><main \_ngcontent-ng-c2193908431 class="main-content"><router-outlet \_ngcontent-ng-c2193908431></router-outlet> <app-feed \_nghost-ng-c1991951668 ngh="0" jsaction="wheel:;"><div \_ngcontent-ng-</pre> c1991951668 class="feed-container" jsaction="touchstart:;touchend:;"><div</pre> \_ngcontent-ng-c1991951668 class="video-wrapper"><video \_ngcontent-ng-c1991951668 autoplay muted loop playsinline class="feed-video" src="https://static.videezy.com/system/resources/previews/000/007/770/original/p laying\_in\_the\_blackboard.mp4"></video><button \_ngcontent-ng-c1991951668 class="play-pause-overlay" jsaction="click:;"><div \_ngcontent-ng-c1991951668</pre> class="video-overlay-controls"><div \_ngcontent-ng-c1991951668 class="controlitem"><button \_ngcontent-ng-c1991951668 class="overlay-btn" style="background:</pre> rgba(0, 0, 0, 0.6); jsaction="click:;"> 👍 </button><div \_ngcontent-ngc1991951668 class="vote-count">10</div></div><div \_ngcontent-ng-c1991951668 class="control-item"><button \_ngcontent-ng-c1991951668 class="overlay-btn"</pre> style="background: rgba(0, 0, 0, 0.6);" jsaction="click:;"> 🖓 </button><div \_ngcontent-ng-c1991951668 class="vote-count">2</div></div><div \_ngcontent-ngc1991951668 class="control-item"><button \_ngcontent-ng-c1991951668 c1991951668 class="vote-count">2</div></div><div \_ngcontent-ng-c1991951668 class="control-item"><button \_ngcontent-ng-c1991951668 class="overlay-btn"</pre> jsaction="click:;"> @ </button></div><div \_ngcontent-ng-c1991951668 class="video-info-overlay"><h2 \_ngcontent-ng-c1991951668 class="videotitle">Sample Video 1</h2></div></div><div \_ngcontent-ng-c1991951668 class="comments-section"><div \_ngcontent-ng-c1991951668 class="comments-header"> <h3 \_ngcontent-ng-c1991951668>Comments</h3><button \_ngcontent-ng-c1991951668</pre> class="close-comments" jsaction="click:;">x</button></div><div \_ngcontent-ngc1991951668 class="comments-list"><div \_ngcontent-ng-c1991951668 class="comment"><img \_ngcontent-ng-c1991951668 class="avatar" alt="Geralt"</pre> src="https://dailygame.at/wp-content/uploads/2022/08/the-witcher-3-wild-hunt-cdprojekt-765x470.jpg"><div \_ngcontent-ng-c1991951668 class="comment-content"><div</pre> \_ngcontent-ng-c1991951668 class="username">Geralt</div><p \_ngcontent-ngc1991951668 class="comment-text">Great!</div></div><div \_ngcontent-ngc1991951668 class="comment"><img \_ngcontent-ng-c1991951668 class="avatar" alt="Ciri" src="https://i.ds.at/zX9N3Q/c:3834:2160:fp:0.500:0.500/rs:fill:750:0/plain/lidoimages/2025/06/04/40bd7a64-7614-4724-be79-ee5437267e1b.jpeg"><div \_ngcontent-ngc1991951668 class="comment-content"><div \_ngcontent-ng-c1991951668 class="username">Ciri</div>

about:blank 34/36

Line #	Content	Error
	text">Loved it! <div _ngcontent-ng-c1991951668<="" td=""><td></td></div>	
	<pre>class="add-comment"&gt;<input <="" _ngcontent-ng-c1991951668="" pre="" type="text"/></pre>	
	placeholder="Add a comment" value class="ng-untouched ng-pristine ng-valid"	
	<pre>jsaction="input:;blur:;compositionstart:;compositionend:;"&gt;<button _ngcontent-<="" pre=""></button></pre>	
	ng-c1991951668 disabled jsaction="click:;"> Post	
10	<pre><noscript>Please enable JavaScript to continue using this application.</noscript></pre>	Syntax not
12		understood
	<pre><link href="chunk-TRYMGPEF.js" rel="modulepreload"/><link <="" pre="" rel="modulepreload"/></pre>	
12	href="chunk-VR726JLD.js"> <link href="chunk-U2HEBNT5.js" rel="modulepreload"/>	Syntax not
13	<pre><script src="polyfills-B6TNHZQ6.js" type="module"></script><script src="main-&lt;/pre&gt;&lt;/td&gt;&lt;td&gt;understood&lt;/td&gt;&lt;/tr&gt;&lt;tr&gt;&lt;td&gt;&lt;/td&gt;&lt;td&gt;&lt;pre&gt;FUE20V3A.js" type="module"></script></pre>	
	<pre><script id="ng-state" type="application/json">{"nghData":[{"t":</pre></td><td>Hakaaya</td></tr><tr><td>15</td><td>{"36":"t0"},"c":{"36":[{"i":"t0","r":1,"x":2}]}},{"c":{"24":</td><td>Unknown</td></tr><tr><td></td><td>[{"i":"c1991951668","r":1}]}}]}</script></pre>	directive

To appear in search results, crawlers need access to your app.

#### ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

Structured data is valid

^

Run the <u>Structured Data Testing Tool</u> and the <u>Structured Data Linter</u> to validate structured data. <u>Learn more about Structured Data.</u>

Run these additional validators on your site to check additional SEO best practices.

## PASSED AUDITS (7)

Hide

Page isn't blocked from indexing

^

Search engines are unable to include your pages in search results if they don't have permission to crawl them. <u>Learn more about crawler directives</u>.

## Document has a <title> element

^

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <u>Learn more about document titles</u>.

Page has successful HTTP status code

^

Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more about HTTP status codes.

about:blank 35/36

Links have descriptive text		^
Descriptive link text helps search engines	understand your content. <u>Learn how t</u>	o make links more accessible.
Links are crawlable		^
Search engines may use href attributes o an appropriate destination, so more page		the href attribute of anchor elements links to how to make links crawlable
Image elements have [alt] attributes		^
Informative elements should aim for short attribute. Learn more about the alt attrib		e elements can be ignored with an empty alt
Document has a valid hreflang		^
hreflang links tell search engines what ver Learn more about hreflang.	rsion of a page they should list in searc	ch results for a given language or region.
NOT APPLICABLE (1)		Hide
O Document has a valid rel=canonical		^
Canonical links suggest which URL to show	w in search results. <u>Learn more about</u>	canonical links.
Captured at Jun 9, 2025, 11:13	Emulated Desktop with	Single page session
PM GMT+2 Initial page load	Lighthouse 12.6.0  Custom throttling	Using Chromium 137.0.0.0 with devtools

Generated by **Lighthouse** 12.6.0 | File an issue

about:blank 36/36