Syfty Suite

User Guide

for Genetec Security Center

Version 1.1 | March 2026

Syfty LLC

This document is the entire property of Syfty LLC. It may not be copied nor released to any tier, even partially, without expressed approval of Syfty LLC.

Table of Contents

Table of Contents 1

1. Foreword 2

2. Version History 3

3. Abbreviations 3

4. Introduction to Syfty Suite 3

    4.1 What Syfty Suite Provides 3

    4.2 Contacting Syfty 4

5. Accessing the Syfty Dashboard 4

    5.1 From a Web Browser 5

    5.2 From Genetec Config Tool 5

    5.3 Dashboard Layout 5

6. Health & Logs 6

    6.1 Component States 7

    6.2 Restarting a Service 7

    6.3 Logs Tab 7

7. Camera Manager 8

    7.1 Adding a Camera 9

    7.2 Starting and Stopping Analysis 9

    7.3 Updating a Camera 10

    7.4 Removing a Camera 10

    7.5 Camera Stream Requirements 10

8. Watchlist Manager 10

    8.1 Watchlist Types 11

    8.2 Creating a Watchlist 11

    8.3 Editing or Deleting a Watchlist 12

    8.4 Viewing POIs in a Watchlist 12

9. Person of Interest Manager 12

    9.1 Browsing and Searching 13

    9.2 Adding a New POI 13

    9.3 Adding an Existing Fortify POI 13

    9.4 Editing a POI 14

9.5 Viewing POI Details..... 14
10. Event Processing..... 14
10.1 Event Toggles..... 15
10.2 Overlay Toggles..... 15
10.3 Overlay Appearance..... 16
11. Live Event Monitoring in Security Desk..... 16
11.1 Enabling Syfty Custom Events in Options..... 17
11.2 Syfty Custom Events..... 17
11.3 Adding Syfty Columns to the Monitoring Task..... 17
11.4 Monitoring Recognised Faces with Overlays..... 18
11.5 Event-to-Action Workflows..... 18
12. Syfty AI Report Task..... 18
12.1 Opening the Report..... 19
12.2 Filtering Events..... 19
12.3 Viewing Event Video..... 19
13. First-Line Troubleshooting..... 19
13.1 Common Symptoms..... 20
13.2 Log File Locations..... 20
13.3 Escalating to Support..... 21

1. Foreword

The purpose of this document is to describe the features and commands of Syfty Suite, and to provide instructions for performing day-to-day tasks and using the integrated features of Syfty Suite with Genetec Security Center.

2. Version History

Version	Date	Author	Description
1.0	March 2026	Syfty LLC	Initial release of the User Guide for Syfty Suite

3. Abbreviations

Abbreviation	Definition
GSC	Genetec Security Center
SDK	Software Development Kit
API	Application Programming Interface
POI	Person of Interest
SSE	Server-Sent Events
EP	Event Processor (Syfty ServiceHost)
RTSP	Real-Time Streaming Protocol

4. Introduction to Syfty Suite

Genetec's Unified Security Center solution allows security operators to monitor cameras, doors, intrusion devices, IoT devices, and many other security and operations-related data sources. Many of Genetec's end users also use third-party solutions for advanced analytics.

Syfty Suite brings the advanced analytics of Corsight Fortify face recognition into the Unified Security Desk environment. Operators receive face detection and recognition events from Fortify in real time inside Security Center, and the full Event-to-Action workflow built into Security Center can act on those events — alarms, notifications, video bookmarks, and recording.

4.1 What Syfty Suite Provides

- A web-based Syfty Dashboard for managing cameras, watchlists, and Persons of Interest in Corsight Fortify without logging into the Fortify UI
- A native Genetec plugin that exposes the same dashboard inside Config Tool
- A Windows service (the Event Processor) that streams face detection and recognition events from Fortify into Security Center as custom events
- A Windows service (the Overlay Service) that draws face bounding boxes and POI thumbnails on live Security Desk video tiles
- A Syfty AI Report task in Security Desk for investigating face events alongside video

4.2 Contacting Syfty

For any concerns or questions, contact Syfty Support:

- Email: support@syfty.io
- Support Portal: http://support.syfty.io

5. Accessing the Syfty Dashboard

The Syfty Dashboard is the primary interface for configuring cameras, watchlists, and POIs. There are two equivalent ways to access it:

5.1 From a Web Browser

On the machine where Syfty is installed, open a web browser and navigate to:

```
http://localhost:5200
```

From other machines on the same network, replace "localhost" with the hostname or IP address of the Syfty server.

5.2 From Genetec Config Tool

1. Open Genetec Config Tool
2. Go to Tasks > Plugins
3. Select the Syfty AI Plugin role
4. The Syfty Dashboard opens as an embedded view inside Config Tool

Note: The dashboard is the same UI in both places. Changes made in one location appear immediately in the other.

5.3 Dashboard Layout

The dashboard is organised around a left-hand navigation panel:

Section	Purpose
Health & Logs	System topology view and live service logs
Cameras	Add, configure, and start/stop Fortify analysis on Genetec cameras
Watchlists	Create and manage Fortify watchlists (Authorized, Interests, etc.)
Persons	Add, edit, and remove Persons of Interest enrolled in Fortify
Event Processing	Control which events are processed and how overlays are displayed

Migration	Import cameras, watchlists, and POIs from a legacy Syfty database
Settings	Update Fortify, Genetec, database, and license configuration

6. Health & Logs

Health & Logs is the dashboard's default landing page. It shows the live system topology and the connection state of every component Syfty depends on.

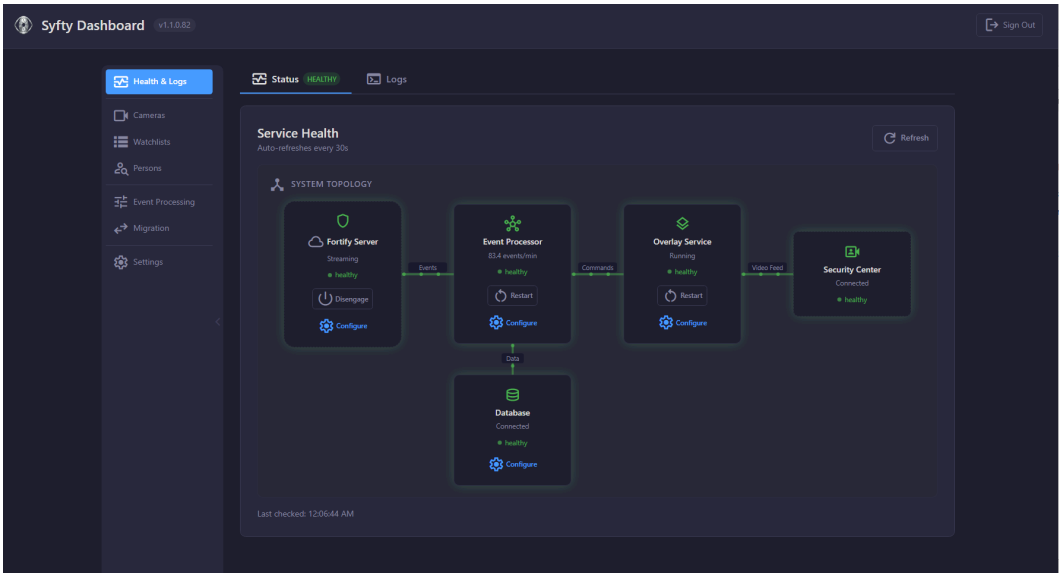


Figure: System topology with live health for each component

6.1 Component States

Component	Healthy when…
Fortify Server	Streaming, healthy — SSE event stream is connected and receiving events
Event Processor	Running, healthy — events/min counter is updating
Overlay Service	Running, healthy — connected to Genetec Media Gateway
Security Center	Connected, healthy — Syfty plugin role is online in Config Tool
Database	Connected, healthy — SQL connection is open

6.2 Restarting a Service

Click the Restart button on the Event Processor or Overlay Service tile to restart the corresponding Windows service. This is the equivalent of restarting the service in services.msc.

6.3 Logs Tab

Switch to the Logs tab at the top of the Health & Logs page to tail the live log output of the Event Processor. Use this for first-line troubleshooting when events stop arriving or a tile turns red.

7. Camera Manager

The Camera Manager lists every Genetec camera that has been enrolled with Fortify for analysis. From here you control which cameras Fortify is actively analysing.

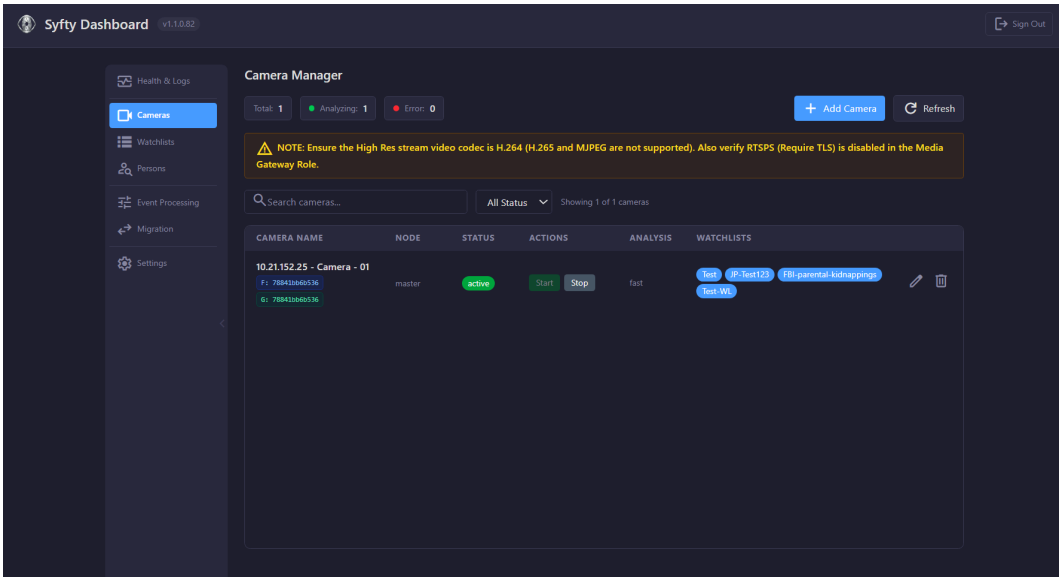


Figure: Camera Manager

7.1 Adding a Camera

5. Click "Add Camera" in the top-right of the Camera Manager
6. Select a Genetec camera from the dropdown (only cameras not already enrolled appear)
7. Optionally select one or more watchlists to associate with the camera
8. Click "Add" to enrol the camera with Fortify

Note: If a camera is missing from the dropdown, click the Refresh button to re-query Genetec. If all cameras have been added, the dropdown is hidden.

7.2 Starting and Stopping Analysis

Each row in the camera table has Start and Stop buttons. Use these to control whether Fortify is actively analysing the stream:

- Start — Fortify begins pulling the camera's high-resolution stream and analysing it for faces

- Stop — Fortify stops pulling the stream and no events are produced for that camera

The Status column shows the camera's current state in Fortify (active, idle, error, etc.). Click Refresh to update the status without reloading the page.

7.3 Updating a Camera

9. Click the Stop button on the camera row
10. Click the pencil (edit) icon at the end of the row
11. Change the watchlist assignments or other settings as needed
12. Click "Save"
13. Click "Start" to resume analysis

7.4 Removing a Camera

14. Click the Stop button on the camera row
15. Click the trash icon at the end of the row
16. Confirm the removal
17. Wait approximately 10 seconds while Syfty removes the camera from Fortify
18. Click Refresh to verify the camera is gone from the list

IMPORTANT: After adding or removing several cameras, restart the Syfty Event Processor service (from Health & Logs) to ensure the event stream is clean.

7.5 Camera Stream Requirements

- The high-resolution stream codec must be H.264. Corsight Fortify does not accept H.265 or MJPEG streams.
- Disable RTSPS (Require TLS) on the Genetec Media Gateway role — Fortify does not support RTSP over TLS.
- Configure resolution and frame rate per Corsight AI's recommendations for optimal recognition performance.

8. Watchlist Manager

Watchlists are the core organising mechanism in Fortify. Every Person of Interest belongs to one or more watchlists, and every camera is associated with the watchlists it should match faces against. The Watchlist Manager lets you create, edit, and delete watchlists without leaving Syfty.

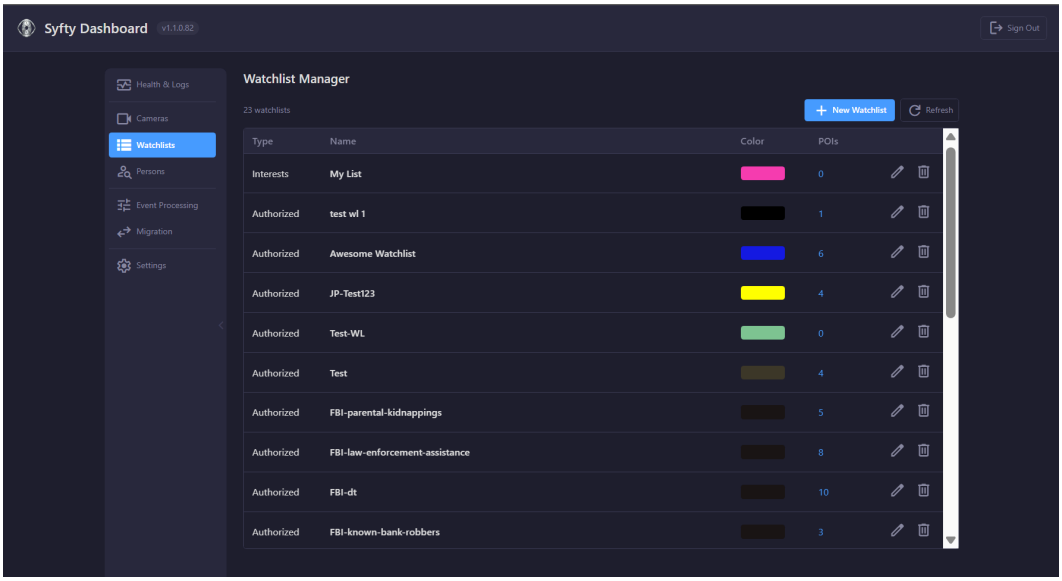


Figure: Watchlist Manager

8.1 Watchlist Types

Type	Purpose
Authorized	Faces that should be allowed (e.g., employees, approved visitors). Use with the Syfty.FaceNotInAuthorizedWatchlist event for unauthorised access alerts.
Interests	Faces that should trigger an alert when recognised (e.g., VIPs, persons of interest, banned individuals).

8.2 Creating a Watchlist

19. Click "New Watchlist" in the top-right
20. Choose the watchlist Type (Authorized or Interests)
21. Enter a Name (used in event tiles and overlays)
22. Pick a Color (used to highlight matching faces in Security Desk video tiles)
23. Click Save

8.3 Editing or Deleting a Watchlist

- Click the pencil icon to rename, recolor, or change the type of a watchlist
- Click the trash icon to delete a watchlist. POIs that belonged only to that watchlist are not deleted — they remain in Fortify but are no longer matched against.

8.4 Viewing POIs in a Watchlist

The POIs column shows a count for each watchlist. Click the count to jump to the Persons view filtered to that watchlist.

9. Person of Interest Manager

The Persons view (Person of Interest Manager) lists every POI enrolled in Fortify. Each POI has a reference photo, a name, and a list of watchlists it belongs to.

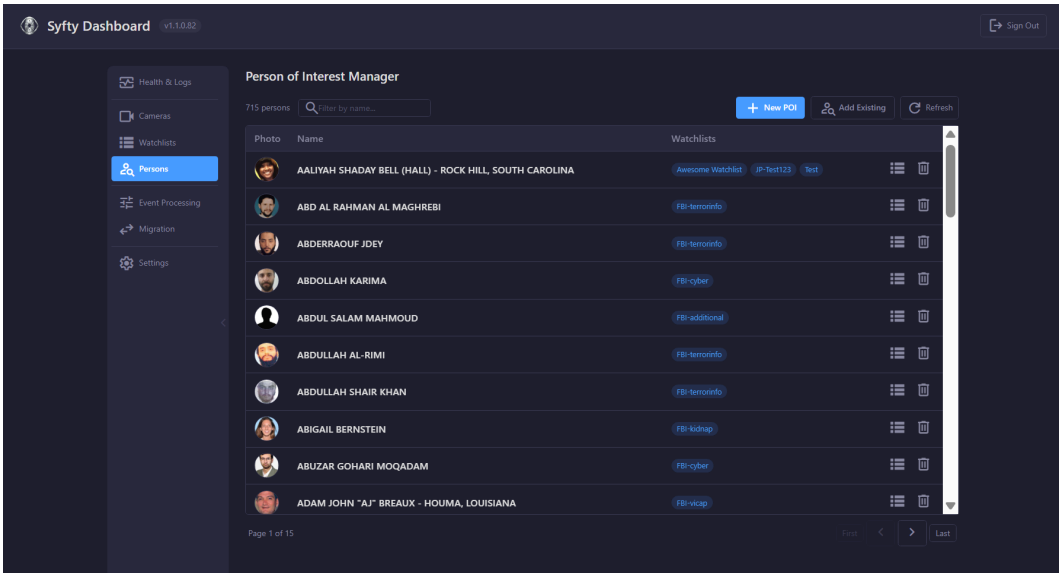


Figure: Person of Interest Manager

9.1 Browsing and Searching

- Use the "Filter by name…" search box to narrow the list
- Use the page controls at the bottom to navigate large lists (e.g., "Page 1 of 15")
- Each row shows the POI thumbnail, name, and the watchlists they appear on (color-coded)

9.2 Adding a New POI

24. Click "New POI" in the top-right
25. Enter the person's name
26. Upload a clear, front-facing photograph (a single recognisable face fills the frame)
27. Select one or more watchlists the POI should belong to
28. Click Save

Note: Fortify rejects images where no face can be detected or where multiple faces are present. Use a clean headshot for best results.

9.3 Adding an Existing Fortify POI

Click "Add Existing" to associate a POI that is already enrolled in Fortify but not yet visible in Syfty. Useful when POIs were added directly through the Fortify UI.

9.4 Editing a POI

- Click the list icon to change which watchlists the POI belongs to
- Click the trash icon to delete the POI from Fortify (this also removes them from all watchlists)

9.5 Viewing POI Details

Click on a POI row to open the detail view, which shows the full reference photo, name, watchlist memberships, and a download button for the reference image.

10. Event Processing

The Event Processing tab controls which Fortify events the Syfty Event Processor consumes, which events trigger video overlays, and how those overlays are displayed.

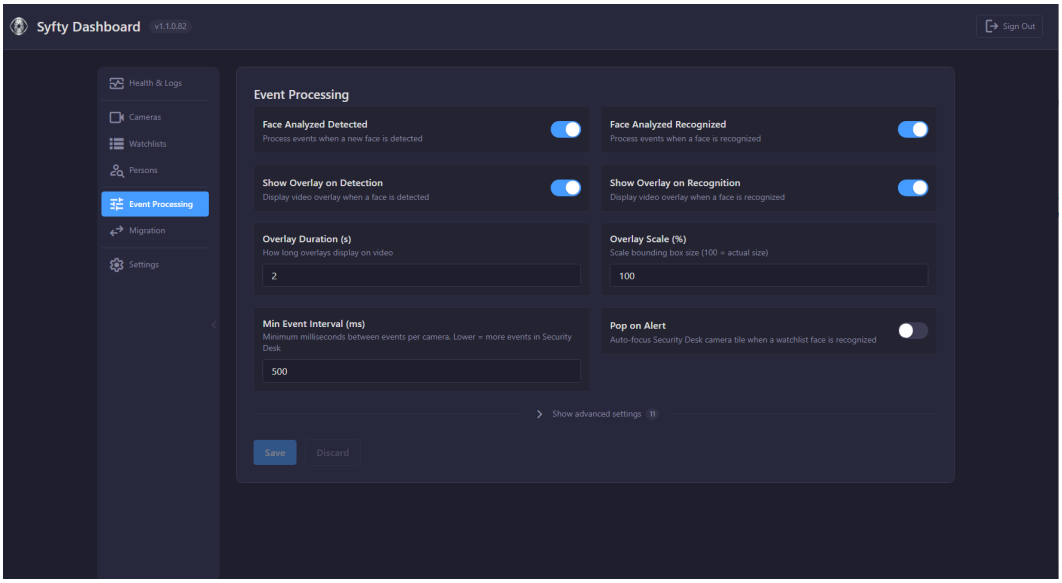


Figure: Event Processing settings

10.1 Event Toggles

Setting	What it controls
Face Analyzed Detected	When ON, Syfty raises a custom event in Security Center every time Fortify detects any face (recognised or not). High volume — use sparingly.
Face Analyzed Recognized	When ON, Syfty raises a custom event every time Fortify recognises a face that matches a watchlist. Lower volume — typically the event you want.

10.2 Overlay Toggles

Setting	What it controls
Show Overlay on Detection	Draw a bounding box on the live video tile for every detected face, even unrecognised ones
Show Overlay on Recognition	Draw a bounding box plus the matched POI thumbnail when a watchlist face is recognised

Note: Detection overlays are visually busy in high-traffic areas. Most production deployments enable Recognition overlays only.

10.3 Overlay Appearance

Setting	Meaning
Overlay Duration (s)	How long the bounding box and thumbnail stay on screen after the event. Default: 2 seconds.
Overlay Scale (%)	Scale of the bounding box relative to the face. 100 = match the detected face exactly. Higher values draw a larger box around the face.
Min Event Interval (ms)	Minimum milliseconds between events for the same camera. Lower = more events visible in Security Desk; higher = less flicker but some events suppressed. Default: 500 ms.
Pop on Alert	When ON, the matching camera tile in Security Desk auto-focuses (pops to front) on a watchlist recognition. Useful for alerting operators.

Click "Show advanced settings" to expose less common parameters (event-type filters, retention windows, etc.).

11. Live Event Monitoring in Security Desk

Once cameras are added and Fortify is producing events, the events appear in Security Desk just like any other Genetec event. A small one-time setup is required to make them visible.

11.1 Enabling Syfty Custom Events in Options

29. In Security Desk, open Options > Events
30. Scroll to the custom events section
31. Enable the Syfty events you want to monitor (see table below)
32. Click Save

11.2 Syfty Custom Events

Event	When it fires
Syfty.FaceAnalyzeDetected	A face was detected on a camera stream (recognised or not)
Syfty.FaceAnalyzeRecognized	A face was recognised as a POI on one of the camera's assigned watchlists
Syfty.FaceTrackingDetected	A tracked face entered the frame
Syfty.FaceTrackingRecognized	A tracked face was identified as a POI
Syfty.FaceNotInAuthorizedWatchlist	A face was recognised but did not match any Authorized watchlist for that camera
Syfty.CameraAnalyzeTimeout	Fortify stopped receiving frames from the camera
Syfty.CameraInputError	Fortify could not decode the camera stream
Syfty.CameraAttemptingReconnect	Fortify is retrying the camera connection
Syfty.CameraErrorStarting	Fortify failed to start analysis on the camera
Syfty.CameraErrorStopping	Fortify failed to stop analysis cleanly
Syfty.CameraNonResponsive	A camera has stopped responding to analysis

Note: Enabling "Display in tile" for the Face Detected event is supported but not practical — it is not possible to display multiple Face Detected events for a single camera in one tile simultaneously.

11.3 Adding Syfty Columns to the Monitoring Task

33. Open a Monitoring task in Security Desk
34. Right-click the column header > Select columns
35. Add the columns named with the Syfty.* prefix that correspond to the events you enabled
36. Click OK

11.4 Monitoring Recognized Faces with Overlays

Drag the cameras enrolled in Syfty into Security Desk tiles. With Recognition overlays enabled in Event Processing (§10.2), the bounding box and matched POI thumbnail appear directly on the live video tile when a watchlist face is recognised.

The bounding box color matches the watchlist color configured in the Watchlist Manager.

11.5 Event-to-Action Workflows

Syfty custom events are standard Genetec events, so the full Event-to-Action engine works with them. Common workflows:

- Trigger an alarm on Syfty.FaceAnalyzeRecognized for a specific Interests watchlist
- Send an email when Syfty.FaceNotInAuthorizedWatchlist fires on a restricted-area camera
- Auto-create a video bookmark for every recognition event
- Pop a camera tile to the operator’s monitor on watchlist recognition (or use the built-in "Pop on Alert" setting in Event Processing)

12. Syfty AI Report Task

Syfty AI Report is a custom investigation task in Security Desk for querying past face events alongside the recorded video. It is installed automatically with the Syfty plugin.

12.1 Opening the Report

37. In Security Desk, click the home icon and open a new task
38. Under Investigation, select "Syfty AI Report"
39. The report opens with empty filters

12.2 Filtering Events

- Time range — last hour, last 24 hours, custom range
- Cameras — one or more cameras enrolled in Syfty
- Event type — detection, recognition, or both
- Watchlist — one or more watchlists (recognition events only)
- POI — specific Person of Interest name

12.3 Viewing Event Video

Each row in the report has a video icon. Click it to play back the recorded video for the camera, aligned to the moment of the event. The matched face thumbnail and POI details are shown alongside the playback.

13. First-Line Troubleshooting

When something stops working, start with the Syfty Dashboard — the topology view in Health & Logs will usually identify the broken component within seconds.

13.1 Common Symptoms

No events appearing in Security Desk

- Open Health & Logs. Look for any tile that is not green.
- If Fortify Server is not "Streaming", the SSE event stream is down. Check the Fortify server and re-test credentials in Settings > Fortify.
- If Event Processor shows zero events/min, restart the service from the Event Processor tile.
- Verify the Syfty custom events are enabled in Security Desk > Options > Events.

Overlays not showing on live video

- Verify the Overlay Service is healthy in Health & Logs.
- Check that "Show Overlay on Recognition" is ON in Event Processing.
- Verify the Media Gateway role is configured in Genetec Config Tool and that RTSPS is disabled.
- Confirm the camera's high-resolution stream is H.264 (not H.265 or MJPEG).

A camera will not start analysis

- Verify the camera streams successfully in Security Desk first — if Genetec cannot play it, Fortify cannot either.
- Confirm the high-res stream codec is H.264.
- Check the Logs tab in Health & Logs for camera-specific errors (look for the camera name or IP).

A POI image will not upload

- Use a clean headshot with a single, recognisable, front-facing face filling most of the frame.
- Avoid images with sunglasses, hats, or heavy shadows.
- Fortify rejects images where no face can be detected or multiple faces are present.

13.2 Log File Locations

Log	Location
Event Processor log	C:\ProgramData\Syfty\logs\servicehost-YYYYMMDD.log
Overlay Service log	C:\ProgramData\Syfty\logs\overlayservice-YYYYMMDD.log
Windows Event Log	Event Viewer > Application (source: SyftyEventProcessor)

13.3 Escalating to Support

When the dashboard does not surface the issue, contact Syfty Support with:

- A description of the symptom and the affected cameras / watchlists / POIs
- The output of http://localhost:5200/api/health/status
- The Event Processor log file for the day of the issue
- Screenshots of the Security Desk event timeline around the time of the issue

Contact details:

- Email: support@syfty.io
- Support Portal: https://support.syfty.io